

CC **485 INOX** Decorative tubular island hood with touch control and EcoPower motor, 40cm





LED


Stop Delay

Timer



FEATURES

Decorative tubular island hood Electronic control with display 3 speeds + 1 intensiveFree Outlet exhaust capacity (m3/h):920 Intensive speed exhaust capacity (m3/h):771 Max speed exhaust capacity (m3/h):525 Min speed exhaust capacity (m3/h): 305 Intensive speed sound level (dBA): 78 Max speed sound level (dBA): 72 Min speed sound level (dBA): 50 2 LEDS lamps 1 Stainless Steel filter Stop delay timer Filter saturation indicator Operating pilot light Anti-return valve included Outlet reduction included Optional recirculation kit with tube cover installation: SET 1/I1 Optional Charcoal Filter: D4C

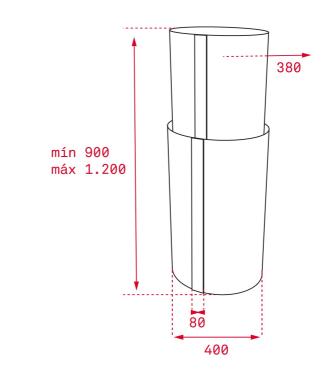

DIMENSIONS

ТЕКА

Product height (mm): 900-1200 Product width (mm): 400 Product depth (mm): 400 Product length (mm): Net weight (Kg): 21,5

TECHNICAL DETAILS

| 1 | |
|-------------|---|
| FEATURES | Certificates: CE; CB |
| | Ø Outlet (mm): 150 |
| | Type of inner light: LED |
| | Inside light Consumption (W): 3 |
| | Plug type: European plug |
| | Power rate (V): 220-240 |
| | Frequency (Hz): 50 |
| | Total hood power (W): 286 |
| | Number of motors: 1 |
| | Motor power (W): 280 |
| | Air flow (Qmin) m3/h: 305 |
| | Air flow (Qmax): 525 |
| | Air flow (Qboost): 771 |
| | |
| | |
| ACCESSORIES | Anti Return valve: Yes |
| | Outlet reduction: Yes |
| | Optional Charcoal Filter: D4C |
| | Conventional recirculation kit (opt) - w/tube cover: SET 1/l1 |
| | |
| | |

MODELS

Number of filters: 1 Filter description: Stainless Steel filters Control panel: Touch control White display Stop delay timer: Yes Filter saturation indicator: Yes Number of speeds: 3+1



ТЕКА

ENERGY LABEL

