




DHT 1285 SS Built-In ceiling hood with contour Rim extraction



Remote Control

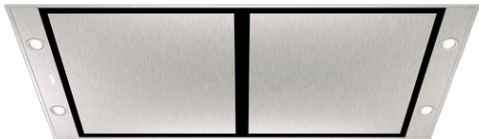

LED



Perimeter
extraction



Stop Delay
Timer

DESCRIPTION

Built-In ceiling hood with contour Rim extraction

COLOURS



REFERENCE


REF. 40484180
EAN. 8421152145890



DHT 1285 SS

FEATURES

Decorative island hood
Push buttons control
Rim extraction
Remote control
3 speeds + 1 intensive
Free Outlet exhaust capacity (m3/h): 920
Max speed exhaust capacity (m3/h): 631
Min speed exhaust capacity (m3/h): 315
Intensive speed exhaust capacity (m3/h): 807
Intensive speed sound level (dBA): 66
Max speed sound level (dBA): 60
Min speed sound level (dBA): 47
4 LED lamps
4 Aluminum filter
Stop delay timer
Filter saturation indicator
Operating pilot light
Anti-return valve included
Outlet reduction included
Optional recirculation kit with tube cover installation: ZUB 9015

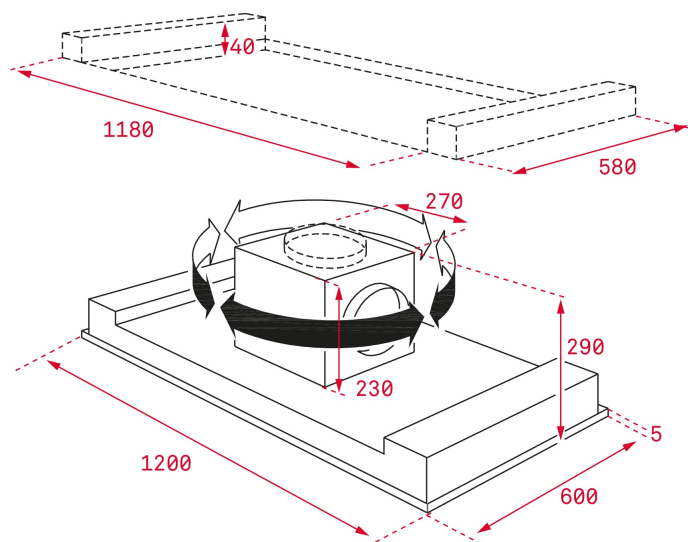

DIMENSIONS

Product height (mm): 305
Product width (mm): 1200
Product depth (mm): 600
Product length (mm):
Net weight (Kg): 27,9

TECHNICAL DETAILS

FEATURES

Certificates: CE; CB; Rohs
Ø Outlet (mm): 150
Type of inner light: LED
Inside light Consumption (W): 3
Plug type: No
Power rate (V): 220-240
Frequency (Hz): 50
Total hood power (W): 292
Number of motors: 1
Motor power (W): 280
Air flow (Qmin) m³/h: 315
Air flow (Qmax): 631
Air flow (Qboost): 807

ACCESSORIES

Anti Return valve: Yes
Outlet reduction : Yes
Optional Charcoal Filter: NO (Küppersbusch has)
Conventional recirculation kit (opt) - w/tube cover: ZUB 9015

MODELS

Number of filters: 4
Filter description: Aluminum
Control panel: Remote control
Remote control: Yes
Stop delay timer: Yes
Filter saturation indicator: Yes



DHT 1285 SS

ENERGY LABEL

