



GFL 77650 Built-in filter hood with Rim extraction and 3 speeds,
70cm



LED



Perimeter
extraction



Stop Delay
Timer

DESCRIPTION

Built-in filter hood with Rim extraction and 3 speeds, 70cm

COLOURS



REFERENCE


REF. 113100003
EAN. 8434778016376



GFL 77650

FEATURES

Built-in filter group
Rim extraction
Electronic control
3 speeds + 1 intensive
Free Outlet exhaust capacity (m3/h): 800
Max speed exhaust capacity (m3/h): 559
Min speed exhaust capacity (m3/h): 285
Intensive speed exhaust capacity (m3/h): 646
Intensive speed sound level (dBA): 71
Max speed sound level (dBA): 66
Min speed sound level (dBA): 52
2 LED Lamps
1 Aluminium filter
Stop Delay Time
Operating pilot light
Anti-return valve included
Outlet reduction included
Optional Charcoal Filter: C01RTK

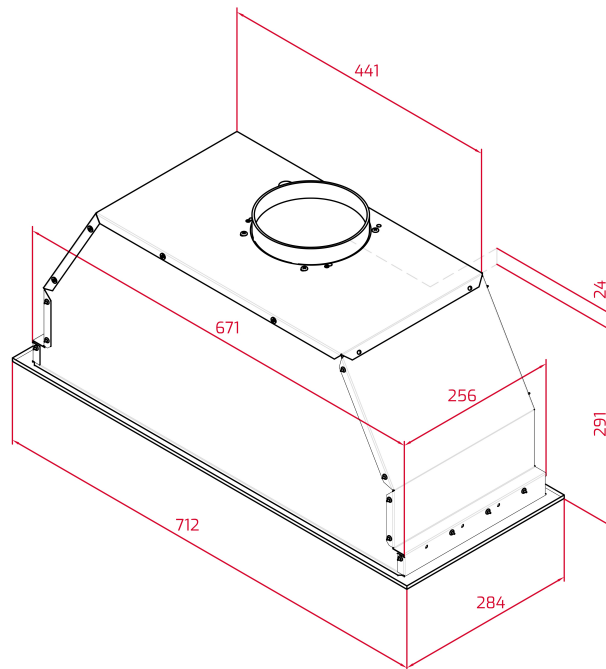

DIMENSIONS

Product height (mm): 316

Product width (mm): 712

Product depth (mm): 284

Product length (mm):

Net weight (Kg): 9,9

TECHNICAL DETAILS

FEATURES

Ø Outlet (mm): 150

Type of inner light: LED

Inside light Consumption (W): 7,4

Plug type: Shucko

Cable Connection Length (cm): 100

Power rate (V): 220 - 240

Frequency (Hz): 50/60

Total hood power (W): 288

Number of motors: 1

Motor power (W): 280

Air flow (Qmin) m3/h: 285

Air flow (Qmax): 559

Air flow (Qboost): 646

ACCESSORIES

Anti Return valve: Yes

Outlet reduction: Yes

Outlet extension: No

Optional Charcoal Filter: C01RTK

Regenerative charcoal filter: No

Conventional recirculation kit (opt) - w/tube cover: No

MODELS

Regenerative recirculation kit (opt) - w/tube cover: No
Conventional recirculation kit (opt) - w/o tube cover: No
Regenerative recirculation kit (opt) - w/o tube cover: No

Number of filters: 1
Filter description: Aluminum Filter
Opening system: Manual
Control panel: Electronic soft bottoms
Stop delay timer: Yes
Number of speeds: 3 + 1



GFL 77650

ENERGY LABEL

