



Kitchen appliances,  
Sinks & taps.



# WISH

Our **WISH** collection offers stunning design  
whilst being energy efficient  
and user friendly.

We have given our best to make your wishes come true...  
because at Teka, we know that sometimes,  
your greatest **WISH** is as simple as sharing pizza with your loved ones...  
preparing your secret recipe...  
or cooking with your friends, sharing great moments  
in the kitchen.

This is why we have created **WISH**  
Because our greatest **WISH** is that yours come true...



About Teka

Teka is a European industrial group founded in Germany in 1924. With over 90 years of experience, Teka is a leading white goods manufacturer and one of the most important groups in the world in the production of stainless steel sinks and taps.

Built-in peace of mind with Teka

From our own manufacturing facilities we can produce high quality products and we want you to be confident when buying Teka.

Therefore, all our ovens, compacts, microwaves, combination microwaves, coffee machines, warming drawers, hobs and hoods are available with an extended 5 year parts and labour warranty. (Other appliances are available with a standard two years cover).

Our stainless steel sinks come with an impressive 75 year warranty against manufacturing defects, so you can be sure that as well as looking great, Teka products will perform for years to come.

2  
YEAR  
PARTS & LABOUR  
GUARANTEE

5  
YEAR  
PARTS & LABOUR  
GUARANTEE

75  
YEAR  
MANUFACTURING DEFECTS  
GUARANTEE



Kitchen Appliances Range

Ovens, Microwaves, Coffee machines and Warming drawer	4-15
Hobs	16-29
Hoods	30-37
Refrigeration	38-43
Dishwashers	44-47
Laundry	48-51

Sinks & Taps Range

Sinks	52-56
Taps	57-59



## COOKING FEATURES



# Ovens, compacts and microwaves: Highly advanced technology to achieve perfect results.

Turning raw ingredients into wonderful meals with energy efficient cooking is easy thanks to our stunning range of ovens and microwaves.



## Ovens with features such as...

# WISH

### OVENS WITH FULL COLOUR 4" TFT DISPLAYS

Look out for the new HLB860 ovens with their full colour 4" TFT displays which not only look good, but guide you step by step and deliver ultimate control and precision.



### NEW TELESCOPIC GUIDES

More robust and smoother running; they allow for smoother removal of the trays and the clip-on system of the guides also makes them easier to install.

Telescopic guides come as standard with our single ovens.



### SMOOTHNESS ABOVE ALL

With the Soft Close system, avoid noisy slamming thanks to the oven's smooth opening & closing. Soft Close also ensures safety and comfort.

## And microwaves that include...



### CERAMIC BASES, EXQUISITE COOKING

Ceramic bases let you cook faster while reducing energy consumption. The cooking area is more spacious and the compartment is easier to clean. Replacing the traditional rotary turntable, a ceramic base also offers consistent wave distribution that provides the best cooking results.



### CRUNCH FUNCTION

Brown all sorts of food with only a spoonful of oil! The ferrite steel browning plate guarantees crisp and even cooking results in a healthier way.

## COOKING FEATURES



### Energy rating

Look out for energy classification icons throughout the brochure.



### Conventional setting

Used for items like sponges and cakes where the heat must be uniform to achieve a spongy texture. Recommended temperature: 170° C - 210° C.



### Bottom heating element

Heats only from underneath, suitable for cooking dishes with a pastry content.



### Conventional fan

Appropriate for roasts and cakes. The fan spreads heat uniformly around the oven, reducing cooking time and temperature. Recommended temperature: 160-200° C.



### Dual Clean

Double auto-cleaning system in one oven: Pyrolysis or HydroClean®.



### Maxi grill

Allows for cooking bigger surfaces than the standard grill, and greater power reduces the time required for browning food.



### Maxi grill with fan

Used when uniform roasting is needed at the same time as surface browning. It's ideal for larger dishes such as poultry and game, when a tray can be placed under the grid to collect leftovers and juices.



### Grill and bottom heating element

Is specially for roasts, of any size.



### Grill

For grilling and browning, particularly suitable for low-to-medium thickness meat like sausages and steaks. Recommended temperature: 170-220° C.



### Turbo setting

The turbo is a heating element fitted in the back. An even temperature is reached and allows cooking at several heights at the same time without mixing smells or flavours.



### Slow cook

Slow function is a special function to prepare recipes at low temperature. It's ideal for food cooked in a pot such as stewed meat and fish and preserves all the juice.



### Pizza setting

It heats from the bottom and back of the oven for a better heat distribution. This function is recommended for pizzas, puff pastries, pastries with fillings, etc.



### Eco function

The Eco function contributes to managing energy efficiently thanks to an intelligent temperature control system that finishes cooking without wasting unnecessary energy.



### Defrosting

Defrosting is done through short, even cycles of hot air in two levels.



### Microwave

It is used for warming up any type of food and drink or cooking a meal in less time than a conventional oven.



### Microwave + Turbo

This function is specifically engineered for faster cooking.



### Microwave + Grill

This combined function is ideal for cooking poultry, meat or pasta resulting in a grilled and crispy surface.



### Microwave defrosting by weight

A defrost system by weight is available on all electronic and touch-control models. It calculates defrosting time according to the type and weight of the food.



### Microwave defrosting by time

Automatic defrost by time is the alternative method, available in the electronic and touch control models, whereby power varies for a more efficient defrosting.



### Ceramic base

Replacing the traditional rotary turntable, a ceramic base offers consistent wave distribution that provides the best cooking results.



### Telescopic tray guides

Allows you to pull out most of the tray easily and smoothly without the risk of spills.



### Express preheating

The express preheating function reduces the preheating time of the oven by 60% when the oven is cold (higher electric consumption stage).



### Personal cooking assistant

Having your own chef is now possible with the personal cooking assistant. 17 recipes at your fingertips. Save time and enjoy the convenience of cooking your favourite dishes with the touch of a button. Just prepare the ingredients and your personal assistant will do the job choosing the right temperature, cooking style and time function automatically.



### Child safety lock

This function is especially designed to contribute to your safety.



## Teka HydroClean® The real Eco-cleaning solution

Teka makes our consumers' dreams come true thanks to its Hydroclean® system: Keeping the oven clean using only the power of water.



### Hydroclean® PRO

The Hydroclean PRO system allows you to programme the cleaning function and turn it on by just pressing a button. One touch, one function. As easy as pie!



The combined action of the steam generated inside the oven cavity and the Hydroclean technology removes stubborn grease and dirt with just a glass of water and minimum effort in only 24 minutes.






LTK1530

## HLB 860P

BUILT IN SINGLE ELECTRIC  
PYROLYTIC OVEN



- 3 pyrolytic cleaning cycles
- Hydroclean® PRO cleaning system
- Gross capacity 71 litres
- TFT 4" true colour touch control
- LED illuminated knob
- Personal cook assistant;  
20 programmed recipes
- Automatic Express preheating
- Slow Cook; low temperature cooking
- Pizza, ferment, defrosting  
& ECO functions
- Children safety block, timer and door
- Automatic disconnection security system
- Removable quadruple glazed door
- Soft close door
- 1+1 Plus telescopic guides; easy slide
- Anti-tip deep tray and reinforced grid
- Tangential ventilation Plus with 2 speeds
- Optional Multicook  
and cast aluminium tray
- A+ energy class




LTK1528

## HLB 860

BUILT IN SINGLE ELECTRIC OVEN



- Hydroclean® PRO cleaning system
- Gross capacity 71 litres
- TFT 4" true colour touch control
- LED illuminated knob
- Personal cook assistant;  
20 programmed recipes
- Automatic Express preheating
- Slow Cook; low temperature cooking
- Pizza, ferment, defrosting  
& ECO functions
- Children safety block
- Automatic disconnection security system
- Removable triple glazed door
- Soft close door
- 1 telescopic guide; easy slide
- Drop down maxi grill
- Anti-tip deep tray and reinforced grid
- Tangential ventilation
- Optional Multicook  
and cast aluminium tray
- A+ energy class




LTK1526

## HLB 840

BUILT IN SINGLE ELECTRIC OVEN



- Hydroclean® PRO cleaning system
- Gross capacity 71 litres
- Touch control with LED display
- Express preheating
- Defrosting & ECO functions
- Children safety block
- Removable double glazed door
- 1 telescopic guide; easy slide
- Drop down maxi grill
- Anti-tip deep tray and reinforced grid
- Dynamic ventilation
- Optional Multicook  
and cast aluminium tray
- A+ energy class






## MULTI-FUNCTION OVENS




LTK1524

### HLB 830

BUILT IN SINGLE ELECTRIC OVEN



- Hydroclean® PRO cleaning system
- Gross capacity 71 litres
- Touch control with LED display
- Express preheating
- Defrosting & ECO functions
- Children safety block
- Removable double glazed door
- 1 telescopic guide; easy slide
- Anti-tip deep tray and cooking grid
- Dynamic ventilation
- A+ energy class



LTK1532

### HLD 720

BUILT UNDER DOUBLE OVEN




- Touch control with Start/Stop programmer
- Children safety block
- Forced ventilation
- Double glazed door
- Deep tray, reinforced grid, 2 standard grids and tray handle

TOP CAVITY

- Conventional Oven
- 4 cooking functions
- Gross capacity 36 litres
- Chromed supports, 3 levels
- Maxi grill
- Energy class B

MAIN CAVITY

- Turbo multifunction oven
- 1 cooking function
- Gross capacity 48 litres
- Energy class A

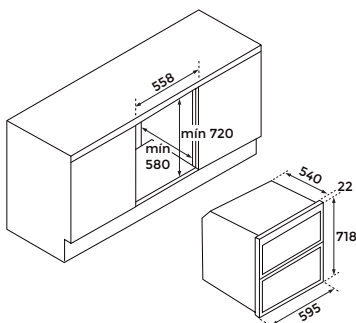

LTK1534

### HLD 890

BUILT IN DOUBLE OVEN




- Touch control with Start/Stop programmer
- Children safety block
- Forced ventilation
- Double glazed door
- 2 deep trays, 2 reinforced grids, standard grids and tray handle

TOP CAVITY

- Conventional Oven
- 4 cooking functions
- Gross capacity 36 litres
- Chromed supports, 3 levels
- Maxi grill
- Energy class B

MAIN CAVITY

- Turbo multifunction oven
- 4 cooking functions
- Gross capacity 65 litres
- Chromed supports, 5 levels
- Energy class A







LTK2520

### HLC 847C

BUILT IN COMPACT MULTI  
FUNCTION OVEN & MICROWAVE



- Hydroclean® PRO cleaning system
- Slippery enamel
- Capacity, gross/net: 41/40 litres
- TFT 4" true colour touch control
- LED illuminated ring knob
- Personal cook assistant:  
20 pre-programmed recipes
- 16 cooking functions
- Quick start 30"
- Automatic Express preheating
- 2,500 W maxigrill
- SlowCook function:  
low temperature cooking
- Microwave combinations,  
pizza and ECO functions
- Defrost by time and weight
- Children safety block
- Automatic disconnection security system
- Triple glazed door
- SoftClose door
- Chromed guides
- 1 telescopic guide easy slide
- Anti-tip glass tray and reinforced grid
- Tangential ventilation




LTK2518

### HLC 844C

BUILT IN COMPACT MULTI  
FUNCTION OVEN & MICROWAVE




- Hydroclean® ECO cleaning system
- Gross capacity 41 litres
- Touch control with LED display
- 11 cooking functions
- Quick start 30 seconds
- 2,500W maxi grill
- Microwave combinations,  
pizza and ECO functions
- Defrost by time and weight
- Children safety block
- Automatic disconnection security system
- Triple glazed door
- Chromed guides
- 5 cooking heights
- Anti tip glass tray and reinforced grid
- Tangential ventilation
- Fingerprint proof stainless steel/black




LTK2516

### MLC 844

BUILT IN MICROWAVE & GRILL



- Gross capacity 45 litres
- Touch control with LED display
- 3 cooking functions
- Quick start 30 seconds
- 5 power levels, 1,000W
- 1,400W grill
- 0-90 min. timer
- Defrost by time and weight
- Automatic disconnection security system
- Double glazed door
- Chromed guides
- 5 cooking heights
- 1 reinforced grid
- Tangential ventilation
- Fingerprint proof stainless steel/black



## MICROWAVES




LTK3508

### ML 822 BIS L

BUILT IN MICROWAVE & GRILL



- Gross capacity 22 litres
- Electronic control with LED display
- Electronic door opening
- 3 cooking functions
- Quick start 30 seconds
- 5 power levels, 850W
- 9 direct access menus
- 1,200W drop down grill
- 0-90 min. timer
- Automatic defrost by time and weight
- Children safety block
- Double glazed door
- Ceramic base
- Browning plate and reinforced grid
- Tangential ventilation
- Left hinged door opening
- Fingerprint proof stainless steel/black

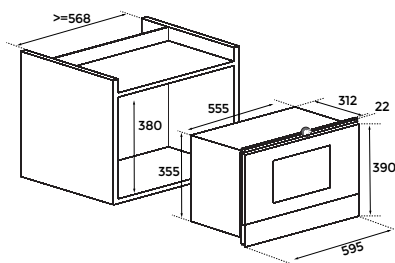


LTK3510

### ML 820 BIS

BUILT IN MICROWAVE & GRILL



- Gross capacity 20 litres
- Touch control with TFT white display
- 3 cooking functions
- Quick start 30 seconds
- 5 power levels, 700W
- 3 direct access menus
- 1,000W quartz grill
- 0-90 min. timer
- Automatic defrost by time and weight
- Children safety block
- Double glazed door
- Stainless steel inner cavity
- 1 round grid
- Left hinged door opening

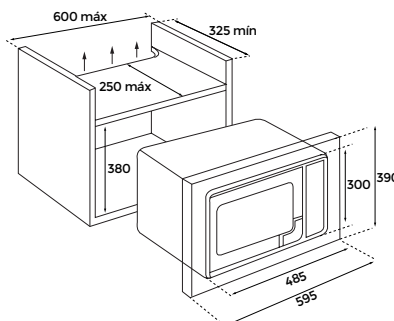


LTK3008

### MWE 207 FI

BUILT IN MICROWAVE & GRILL



- Gross capacity 20 litres
- 3 cooking functions
- Quick start 30 seconds
- 5 power levels, 800W
- 1,000W quartz grill
- 0-95 min. timer
- Automatic defrost by time and weight
- Children safety block
- Stainless steel inner cavity
- Includes built in kit
- Left hinged door opening

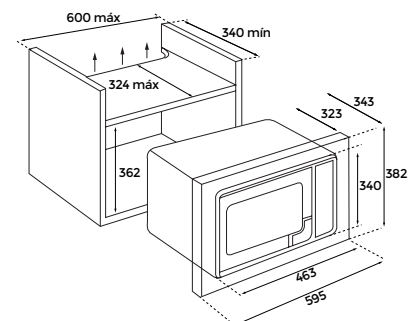





LTK12504




### CLC 835 MC

BUILT IN COFFEE MACHINE

- Multi capsule\* and ground coffee
- Capacity 1 cup
- Height adjustable cup support, 3 levels
- 3 functions (coffee, steam & hot water)
- Touch control panel with TFT 4" display
- Pump power: 19 bar
- Retractable pipe for steam
- 2 side storage compartments
- Storage drawer
- Liquid waste tray and waste bin
- Water tank capacity: 1 litre
- Descaling function
- Temperature and quantity of coffee regulation; extra large, large, medium, small and infusions
- LED lighting

\* 5 Capsule adaptors (Nespresso®, Lavazza Point®, Caffitaly®, Easy serving espresso, Coffee powder)

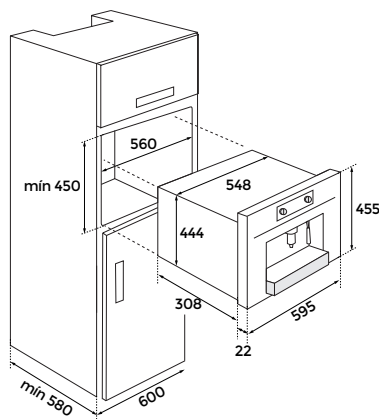


LTK9514





### CP 15 GS

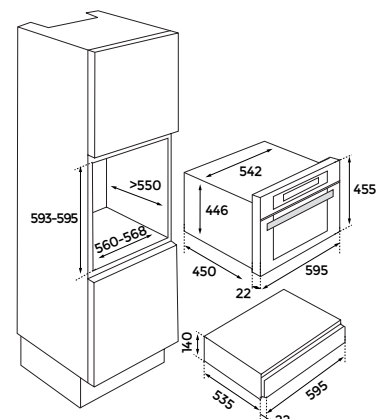WARMING DRAWER





- Push-pull opening system
- Telescopic drawer with anti sliding material
- 6 place settings
- 10cm useable height
- Temperature range 30-80°C
- Max. nominal power 430W
- Ideal to combine with compact ovens & microwaves
- Glass front



## COOKING TECHNICAL SPECIFICATIONS





				
<b>Model</b>	<b>HLB 860P</b>	<b>HLB 860</b>	<b>HLB 840</b>	<b>HLB 830</b>
Page	7	7	7	8
<b>DIMENSIONS</b>				
External (HxWxDmm)	595x595x559	595x595x559	595x595x559	595x595x559
Inner Cavity (HxWxDmm)	367x475x405	367x475x405	367x475x405	367x475x405
Capacity (Litres)	70	70	70	70
<b>ELECTRICAL CONNECTION</b>				
Voltage (V)	220/240	220/240	220/240	220/240
Frequency (Hz)	50/60	50/60	50/60	50/60
Max. Connection Rating (W)	3,552	3,215	3,552	2,615
Cable Connection Length (cm)	150 + plug	150 + plug	110	110
<b>FEATURES</b>				
Fingerprint Proof St/Steel	Y	Y	Y	Y
Cooking Functions	12	12	9	6
Power Levels	~	~	~	~
Temperature Regulator	30/270°	30/270°	50/250°	50/250°
Touch Control	Y/TFT 4"	Y/TFT 4"	Y/LED Display	Y/LED Display
Soft Close	Y	Y	N	N
Recipes	20	20	N	N
Slow Cook; Low Temperature Cooking	Y	Y	N	N
Express Quick Heating	Automatic	Automatic	Y	Y
Telescopic Guides	1+1 Full Easy Slide	1 Easy Slide	1 Easy Slide	1 Easy Slide
Drop Down Grill/Grill	N	Y	Y	N
Light	25W	25W	25W	25W
<b>SAFETY SYSTEMS</b>				
Auto Disconnection	Y	Y	N	N
Child Safety Lock	Y	Y	Y	Y
Anti-tip Tray System	Y	Y	Y	Y
Glazed Door	4 Removable	2 Removable	2 Removable	2 Removable
<b>CLEANING SYSTEMS</b>				
Enamel	Non stick	Non stick	Non stick	Non stick
Pyrolytic	Y	N	N	N
HydroClean	PRO	PRO	PRO	PRO
<b>ACCESSORIES</b>				
MultiCook/Cast Aluminium Tray	Optional	Optional	Optional	Optional
Anti-tip Baking/Deep Tray (50mm)	N/Y	N/Y	N/Y	N/Y
Anti-tip Reinforced/Cooking Grid	Y/N	Y/N	Y/N	N/Y
<b>ENERGY EFFICIENCY</b>				
Bottom Heat (W)	1,050	1,150	1,150	1,150
Grill/Maxi Grill (W)	1,050/2,450	1,100/2,500	1,100/2,500	1,100/2,500
Traditional (W)	2,450	2,550	2,550	2,550
Turbo (W)	2,000	2,000	2,000	~
Multi-function Motor (W)	25	22	22	22
Cooling Fan Motor (W)	30	18	18	18
Microwave Power (W)	~	~	~	~
Energy Class	A+	A+	A+	A+

## COOKING TECHNICAL SPECIFICATIONS

				
<b>Model</b>	<b>HLD 720</b>	<b>HLD 890</b>	<b>HLC 844C</b>	<b>HLC 847C</b>
Page	8	8	9	9
<b>DIMENSIONS</b>				
External (HxWxDmm)	718x595x562	888x595x562	455x595x559	455x595x559
Inner Cavity (HxWxDmm)	430x452x160/395x452x215	430x452x160/396x455x313	232x475x365	232x475x365
Capacity (Litres)	36/48	36/65	41	40
<b>ELECTRICAL CONNECTION</b>				
Voltage (V)	220/240	220/240	220/240	220/240
Frequency (Hz)	50/60	50/60	50	50
Max. Connection Rating (W)	4498	5298	3,400	3,400
Cable Connection Length (cm)	~	~	110	110
<b>FEATURES</b>				
Fingerprint Proof St/Steel	Y	Y	Y/Black	Y/Black
Cooking Functions	4/1	4/4	11	16
Power Levels	~	~	5	5
Temperature Regulator	50/250°	50/250°	50/250°	30/270°
Touch Control	Y	Y	Y/LED Display	Y/TFT 4"
Soft Close	N	N	N	Y
Recipes	N	N	N	20 recipes
Slow Cook; Low Temperature Cooking	N	N	N	Y
Express Quick Heating	N	N	N	Automatic
Telescopic Guides	N	N	N	1 easy slide
Drop Down Grill/Grill	Y	Y	N	N
Light	25W	25W	25W	25W
<b>SAFETY SYSTEMS</b>				
Auto Disconnection	N	N	Y	Y
Child Safety Lock	Y	Y	Y	Y
Anti-tip Tray System	Y	Y	Y	Y
Glazed Door	2	2	3	3
<b>CLEANING SYSTEMS</b>				
Enamel	Y	Y	Non stick	Non stick
Pyrolytic	N	N	N	N
HydroClean	N	N	ECO	PRO
<b>ACCESSORIES</b>				
MultiCook/Cast Aluminium Tray	N	N	N	N
Anti-tip Baking/Deep Tray (50mm)	N/Y	Y/ Y	Glass	Glass
Anti-tip Reinforced/Cooking Grid	Y	Y	Y	Y
<b>ENERGY EFFICIENCY</b>				
Bottom Heat (W)	1,050/~	1,500/1,500	~	1,000
Grill/Maxi Grill (W)	1,500/1,100	1,050/~	-/2500	1400/2500
Traditional (W)	2,650/~	2,650/~	2,100	2,100
Turbo (W)	~1,800	~2,000	1,600	1,600
Multi-function Motor (W)	~30	~30	30	30
Cooling Fan Motor (W)	18	18	18	18
Microwave Power (W)	~	~	1000	1000
Energy Class	B/A	B/A	~	~



## COOKING TECHNICAL SPECIFICATIONS

				
<b>Model</b>	<b>MLC 844</b>	<b>ML 822 BIS L</b>	<b>ML 820 BIS</b>	<b>MWE 207 FI</b>
Page	9	10	10	10
<b>DIMENSIONS</b>				
External (HxWxDmm)	455x595x559	390x595x334	390x595x325	382x595x343
Inner Cavity (HxWxDmm)	232x475x405	280x350x220	210x305x280	218x295x315
Capacity (Litres)	45	22	20	20
<b>ELECTRICAL CONNECTION</b>				
Voltage (V)	220/240	220/240	220/240	220/240
Frequency (Hz)	50	50	50	50
Max. Connection Rating (W)	3,200	2,500	1,100	1,200
Cable Connection Length (cm)	110	110+schuko	110+schuko	120
<b>FEATURES</b>				
Fingerprint Proof St/Steel	Y/Black	Y/Black	Y/Black	Y
Cooking Functions	3	3	3	3
Power Levels	5	5	5	5
Grill	Y	Y	Y	Y
Electronic Door Opening	N	Y	N	N
Controls	Touch/LED Display	Electronic/LED Display	Touch/TFT white	Electromechanical
Direct Access Menu	N	9	3	8
Ceramic Base	N	Y	N	N
Turntable	N	N	24cm	Y
Quick Start	N	Y	Y	Y
<b>SAFETY SYSTEMS</b>				
Auto Disconnection	Y	Y	Y	N
Child Safety Lock	N	Y	Y	N
Anti-tip Tray System	N	N	N	N
Glazed Door	2	2	2	2
<b>ACCESSORIES</b>				
Anti-tip Reinforced/Cooking Grid	Y	N	N	N
Grid with Feet	N	1	1	1
Browning Plate	N	Y	N	N
<b>ENERGY EFFICIENCY</b>				
Grill/Maxi Grill (W)	1,400	1200	1000	1000
Cooling Fan Motor (W)	18	~	~	~
Microwave Power (W)	1000	850	700	800


**Model**
**CLC 835 MC**
**CP 15 GS**

Page

11

11

**DIMENSIONS**

External (HxWxDmm)

455x595x330

140x595x557

Cabinet Opening (HxWxDmm)

450x560x580

560-568x550

**ELECTRICAL CONNECTION**

Tension (V)

230

230

Frequency (Hz)

50-60

50-60

Max, Nominal Power (W)

2,100

420

Cable Connection Length (cm)

110+schuko

110+schuko

**FEATURES**

Fingerprint Proof St/Steel

Y/Black

Y/Black

Electronic Controls

Y/TFT 4"

~

No, of Cups

1

~

Height Adjustable Cup

Y

~

Grinded Coffee

Y

~

Coffee Capsules

Y

~

Capacity of Water Tank

1 Litre

~

Pump Pressure

19 bar

~

Place Settings

~

6

Useable Height

~

10cm

Temperature Range

~

30-80°C

**ADDITIONAL TELESCOPIC GUIDES**

LTK13406 - Telescopic Guides Kit (1 Height)

LTK13404 - Telescopic Guides Kit (2 Height)



## Hobs:

The real choice whatever  
your preference is.

Teka offers an innovative range of hobs. The iKnob offers precision control and an extractable magnetic control knob making cleaning easy. Whilst you can have the best of both worlds with the Dual Fuel IG 940 1G which offers induction and gas cooking.



## HOB FEATURES



**Touch control**  
Operated via touch control buttons for easy use.



**Stop & go**  
The cooking process can be paused without the need to restart the hob, avoiding food burning or overcooking.



**Digital programming**  
Allows the beginning and the end of the cooking process from, 1 minute to 99 minutes, to be set. When the time is over the hob switches off.



**Triple burner**  
Fast, high output triple ring burner required for many types of cooking.



**Autoignition**  
A spark generator, fitted inside the body of the gas burner, lights it up automatically, saving you from having to use traditional lighters or matches.



**Auto lock**  
The thermocouple is a safety element located in the burner. When the thermocouple detects that the flame has gone out it cuts off the gas flow within approximately 10-20 seconds.



**Flush Burner**  
The EW range features flush burners. The 90cm models include a wok accessory.



**Pan optimisation**  
This innovative system exclusive to the Teka induction range, reaches the power level selected, regardless of the pan's iron quality.



**Child safety lock**  
This function is especially designed to contribute to your safety.



**Flexizone**  
Enables you to use several pans at the same time with no energy waste.



**iKnob**  
Extractable magnetic knob to select the power level and cooking time of each zone with great precision.



**Multi-Slider Pro**  
Touch control giving greater level of precision. Direct control of each cooking zone plus accessible special functions eg. simmering.



**Multi-Slider**  
Raise the temperature of each cooking zone just by running your finger across each display.



**Power Plus**  
A boost function that increases total power up to 70% for a maximum of 10 minutes.




LTK4566

### EX60.1 4C

60CM GAS HOB



- Frontal control knobs
- Cast iron pan supports
- Dimensions: 580 x 500mm
- Auto lock safety device
- Autoignition
- 4 cooking zones:
  - 1 fast burner 2.8kW
  - 2 semi fast burner 1.75kW
  - 1 auxiliary burner 1kW

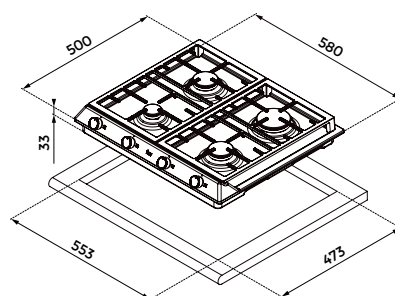



LTK4568

### EX70.1 5C

70CM GAS HOB



- Frontal control knobs
- Cast iron pan supports
- Dimensions: 680 x 500mm
- Auto lock safety device
- Autoignition
- 5 cooking zones:
  - 1 double ring burner 4.00kW
  - 1 fast burner 2.8W
  - 2 semi fast burner 1.75kW
  - 1 auxiliary burner 1kW

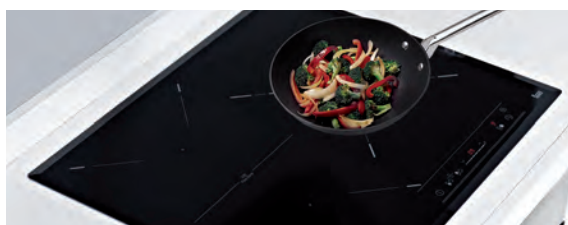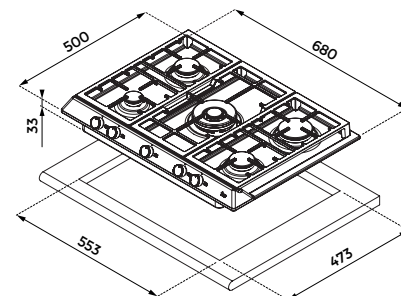

## GAS HOBS




LTK4570

### EX90.1.5G

90CM GAS HOB



- Frontal control knobs
- Cast iron pan supports
- Dimensions: 860 x 500mm
- Auto lock safety device
- Autoignition
- High efficiency burner
- 5 cooking zones:
  - 1 double ring burner 4.0kW
  - 1 fast burner 2.8kW
  - 2 semi fast burner 1.75kW
  - 1 auxiliary burner 1kW

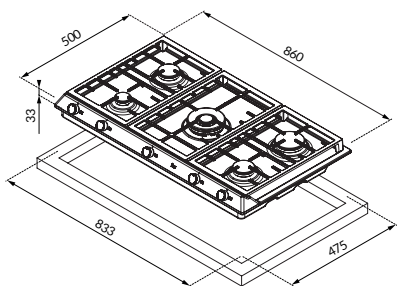


LTK4508

### EWF 60 4G

60cm FLUSH FIT GAS HOB



- Frontal control knobs
- Cast iron pan supports
- Dimensions: 590 x 520mm
- Autoignition integrated into each burner and operated by single control knob
- Auto lock safety device - each burner
- 4 Cooking zones:
  - 1 fast burner 2.8kW
  - 1 semi fast burner 1.75kW
  - 1 semi fast burner 1.4kW
  - 1 auxiliary burner 1kW
- Can be used with natural gas or LPG



\* For flush-fitting of this hob a rebate of approximately 6mm around all edges, within the hob outer dimensions is suggested.




LTK4510

### EWF 90 5G

90cm FLUSH FIT GAS HOB



- Frontal control knobs
- Cast iron pan supports
- Triple ring burner
- Dimensions: 870 x 520mm
- Autoignition integrated into each burner and operated by single control knob
- Auto lock safety device - each burner
- 5 Cooking zones:
  - 1 triple ring burner 3.1kW
  - 1 fast burner 2.8kW
  - 1 semi fast burner 1.75kW
  - 1 semi fast burner 1.4kW
  - 1 auxiliary burner 1kW
- Can be used with natural gas or LPG

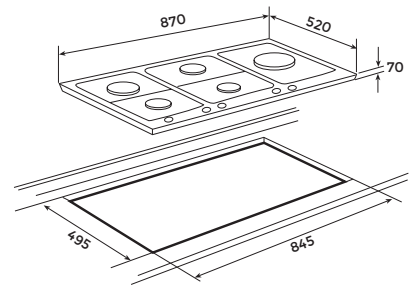

\* For flush-fitting of this hob a rebate of approximately 6mm around all edges, within the hob outer dimensions is suggested.




LTK4512

### CGW LUX 60 4G

60cm GAS ON GLASS HOB



- Frontal control knobs
- Cast iron pan supports
- Dimensions: 610 x 512mm
- Autoignition integrated into each burner and operated by single control knob
- Auto lock safety device - each burner
- Tempered glass
- Frameless
- 4 Cooking zones:
  - 1 triple ring burner 4kW
  - 1 fast burner 2.8kW
  - 1 semifast burner 1.75kW
  - 1 auxiliary burner 1kW
- Can be used with natural gas or LPG

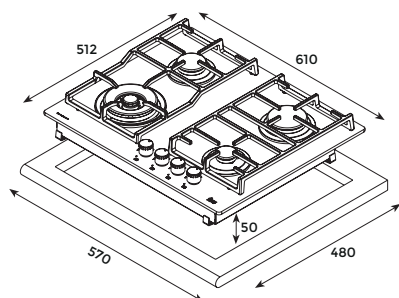


LTK4514

### CGW LUX 70 5G

70cm GAS ON GLASS HOB



- Frontal control knobs
- Cast iron pan supports
- Dimensions: 710 x 512mm
- Autoignition integrated into each burner and operated by single control knob
- Auto lock safety device - each burner
- Tempered glass
- Frameless
- 5 Cooking zones:
  - 1 triple ring burner 4kW
  - 1 fast burner 2.8kW
  - 1 semi fast burner 1.75kW
  - 1 semi fast burner 1.4kW
  - 1 auxiliary burner 1kW
- Can be used with natural gas or LPG

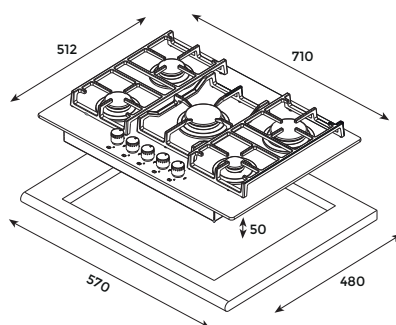


LTK4516

### CGW LUX 60 TC 4G

60cm TOUCH CONTROL  
GAS ON GLASS HOB



- Touch control
- Cast iron pan supports
- Dimensions: 610 x 512mm
- Auto lock safety device - each burner
- Autoignition each burner
- Cooking programmer
- Ceramic glass
- Frameless
- 4 Cooking zones:
  - 1 rapid burner 2.8kW
  - 1 semi rapid burner 1.75kW
  - 1 semi rapid burner 1.4kW
  - 1 auxiliary burner 1kW
- Can be used with natural gas or LPG

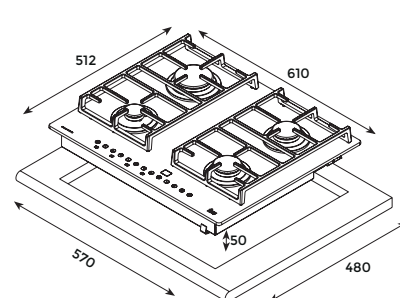




LTK4518

### CGW LUX 90 TC 5G

90cm TOUCH CONTROL  
GAS ON GLASS HOB



- Touch control
- Cast iron pan supports
- Dimensions: 870 x 512mm
- Auto lock safety device - each burner
- Autoignition each burner
- Cooking programmer
- Frameless ceramic glass
- 5 Cooking zones:
  - 1 double ring burner 4.2kW
  - 1 rapid burner 2.8kW
  - 1 semi rapid burner 1.75kW
  - 1 semi rapid burner 1.4kW
  - 1 auxiliary burner 1kW
- Can be used with natural gas or LPG

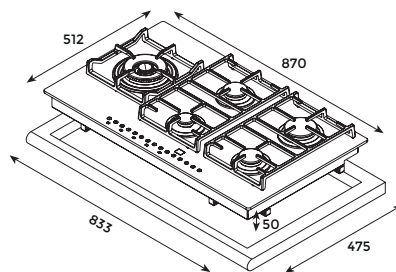


LTK4016

### IG 940 1G

90CM GAS ON GLASS  
& INDUCTION HOB



- Touch control panel
- Cast iron pan support
- Cooking time programmer independent each zone
- Power Plus function
- Power function and management
- Security blocking
- Residual heat indicator
- Dimensions: 880 x 505mm
- Auto lock safety device
- Autoignition
- 5 cooking zones:
  - 2 induction Ø 210mm
  - 2 induction Ø 145mm
  - 1 gas double ring burner 5kW
- Child safety block

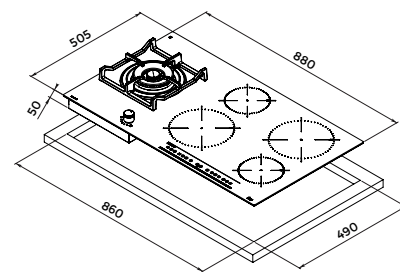





LTK4704

### IR 9530

90CM INDUCTION HOB



- Touch control slider
- Cooking time programmer
- iQuick boiling function
- Keep warm function
- Power Plus function
- Stop & Go Function
- Pan optimization
- Pan detector
- Low temperature function
- Child safety lock
- Residual heat indicators
- 5 cooking zones:
  - 1 induction Ø 190/300mm
  - 2 induction Ø 180mm
  - 1 induction Ø 210mm
  - 1 induction Ø 145mm
- Maximum nominal power 11,000W

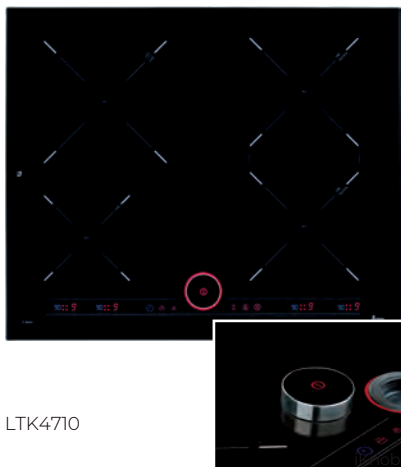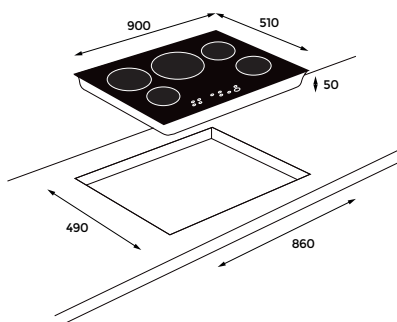


LTK4710

### IT 6450

60CM INDUCTION HOB



- iKnob touch control
- Cooking time programmer
- iQuick boiling function
- Keep warm function
- Power Plus function
- Stop & Go Function
- Pan optimization
- Pan detector
- Mute function
- Child safety lock
- Residual heat indicators
- 4 cooking zones:
  - 1 induction Ø 210mm
  - 2 induction Ø 180mm
  - 1 induction Ø 145mm
- Maximum nominal power 7,400W

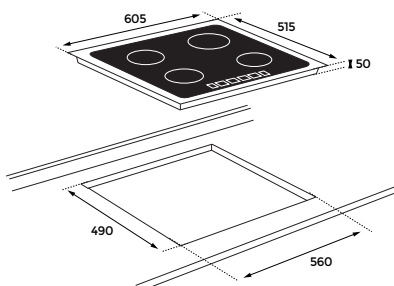


LTK4702

### IR 8400


80CM INDUCTION HOB



- Touch control slider
- Cooking time programmer
- Power Plus function
- Pan optimization
- Pan detector
- Low temperature function
- Child safety lock
- Residual heat indicators
- 4 cooking zones:
  - 1 induction Ø 210mm
  - 2 induction Ø 180mm
  - 1 induction Ø 145mm
- Maximum nominal power 7,400W

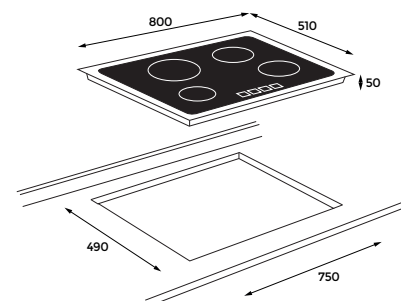



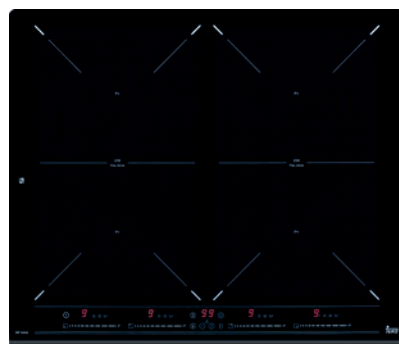


LTK4700

### IZF 6424

60CM SPACE INDUCTION HOB



- Multi slider PRO touch control
- 2 Flexizone 235x395mm
- Cooking time programmer
- Power Plus function
- Pan optimization
- Pan detector
- Child safety block
- 3 special iCooking functions: simmering, melting and keep warm
- Stop & Go function
- Child safety lock
- Residual heat indicators
- 4 flex induction zones: 235x180mm
- Maximum nominal power 7,400W

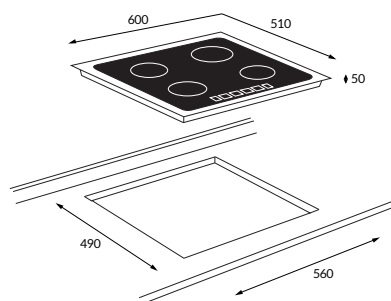


LTK4712


### IB 6415

60cm INDUCTION HOB



- MultiSlider touch control
- Cooking time programmer
- Independent programmer of each cooking zone
- Power Plus function
- Stop&Go Function
- Power Management function
- Mute function
- Pan detector
- Child safety lock
- Residual heat indicator
- 4 Cooking zones:
  - 1 Induction element (210mm)
  - 1 Induction element (180mm)
  - 2 Induction zones (145mm)
- Maximum nominal power: 7,200W

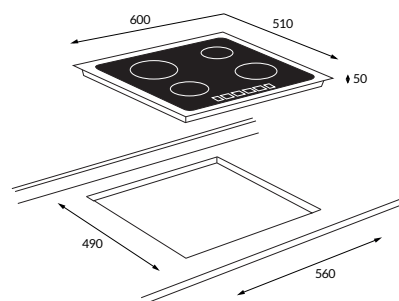

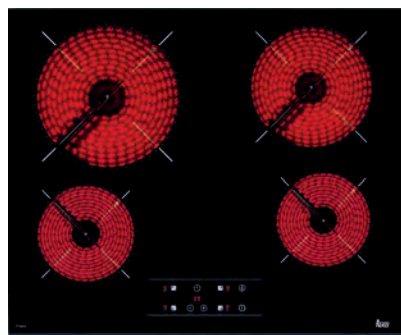

LTK4650





Metal Edge

## TT 6415

60CM CERAMIC HOB



- Touch control panel
- Cooking time programmer
- Burst of cooking function
- Child safety lock
- Residual heat indicators
- 4 cooking zones:
  - 1 high light Ø 210mm
  - 1 high light Ø 180mm
  - 2 high light Ø 145mm
- Maximum nominal power 6,300W
- Slim metal frame

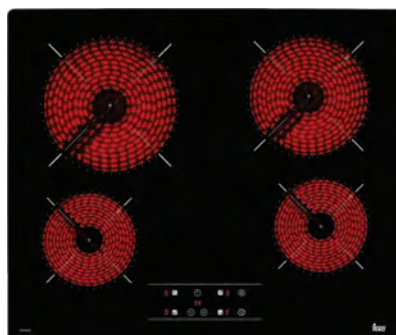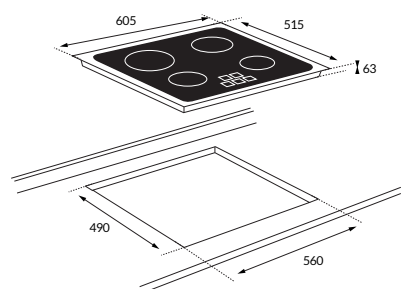

LTK4014





Frameless Edge

## TB 6415




60CM CERAMIC HOB

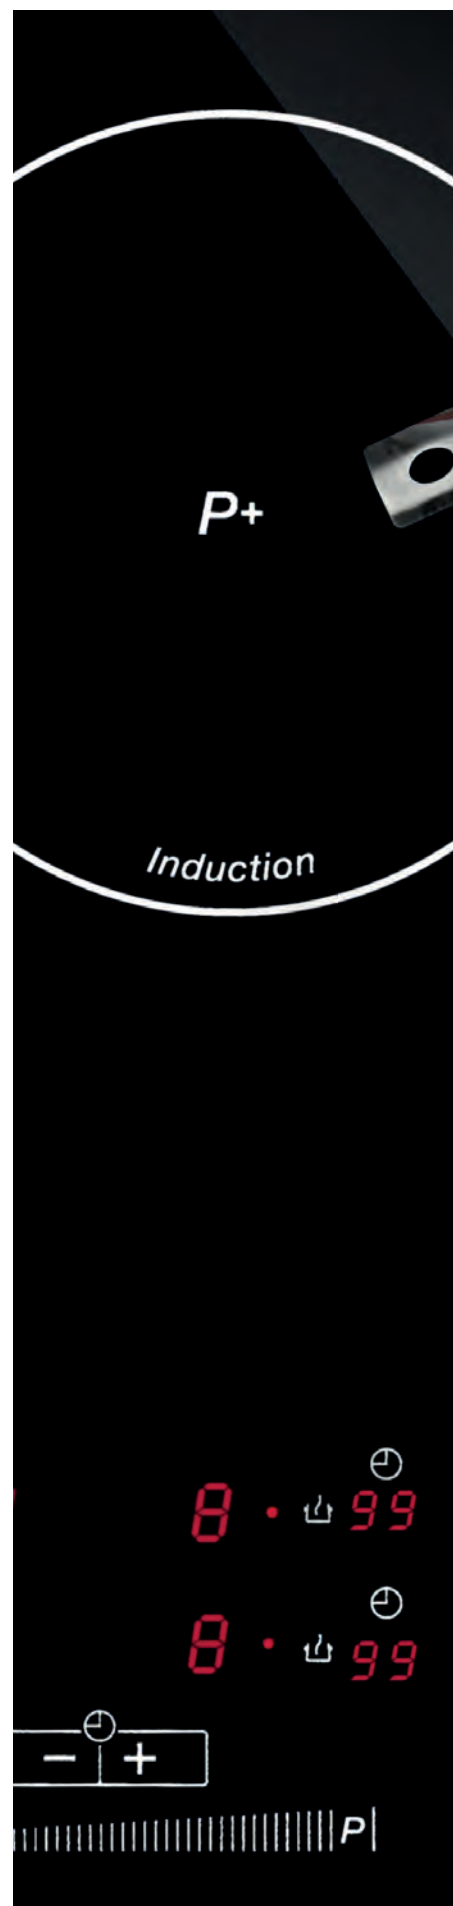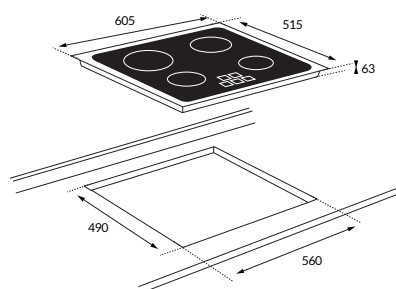

- Touch control panel
- Cooking time programmer
- Burst of cooking function
- Child safety lock
- Residual heat indicators
- 4 cooking zones:
  - 1 high light Ø 210mm
  - 1 high light Ø 180mm
  - 2 high light Ø 145mm
- Maximum nominal power 6,300W
- Frameless glass



## HOBS TECHNICAL SPECIFICATIONS

			
<b>MODEL</b>	<b>EX60.1 4G</b>	<b>EX70.1 5G</b>	<b>EX90.1 5G</b>
Page	17	17	18
<b>DIMENSIONS</b>			
External (HxWxDmm)	580x500	680x500	860x500
Built In (HxWxDmm)	52x553x473	52x553x473	52x833x473
<b>ELECTRICAL CONNECTION</b>			
Power Supply (V)	230	230	230
Frequency (Hz)	50-60	50-60	50-60
Max, Nominal Power	0,6	0,6	1,1
<b>GAS CONNECTION</b>			
Maximum Power (kW)	7,3	11,30	11,30
<b>FEATURES</b>			
Triple Ring Burner (4kW)			
Triple Ring Burner (3,1kW)			
Double Ring Burner (5,0kW)			
Double Ring Burner (4,2kW)			
Double Ring Burner (4,0kW)		1	1
Fast Burner (2,8kW)	1	1	1
Semi Fast Burner (1,75kW)	2	2	2
Semi Fast Burner (1,4kW)			
Auxiliary Burner (1,0kW)	1	1	1
Induction Zone (dia,210mm: 1,5kW - Power 2,0kW)			
Induction Zone (dia,145mm: 1,2kW - Power 1,6kW)			
<b>HOB PERFORMANCE</b>			
Energy Efficiency For The Whole Hob (%)	57	57	57
<b>ACCESSORIES</b>			
Enamelled Grids	N	N	N
Cast Iron Grids	Y	Y	Y
<b>SAFETY SYSTEMS</b>			
Residual Heat Indicator	N	N	N
Automatic Safety Device	N	N	N






MODEL	EWF 60 4G	EWF 90 5G	CGW LUX 60 4G	CGW LUX 70 5G
Page	18	18	19	19
<b>DIMENSIONS</b>				
External (HxWxDmm)	590x520	870x520	610x512	710x512
Built In (HxWxDmm)	70x565x495	70x845x495	50x570x480	50x570x480
<b>ELECTRICAL CONNECTION</b>				
Power Supply (V)	230	230	230	230
Frequency (Hz)	50-60	50-60	50-60	50-60
Max, Nominal Power	1,1	1,1	1,1	0,6
<b>GAS CONNECTION</b>				
Maximum Power (kW)	6,95	10,05	9,55	10,95
<b>FEATURES</b>				
Triple Ring Burner (4kW)			1	1
Triple Ring Burner (3,1kW)		1		
Double Ring Burner (5,0kW)				
Double Ring Burner (4,2kW)				
Double Ring Burner (4,0kW)				
Fast Burner (2,8kW)	1	1	1	1
Semi Fast Burner (1,75kW)	1	1	1	1
Semi Fast Burner (1,4kW)	1	1		1
Auxiliary Burner (1,0kW)	1	1	1	1
Induction Zone (dia,210mm: 1,5kW - Power 2,0kW)				
Induction Zone (dia,145mm: 1,2kW - Power 1,6kW)				
<b>HOB PERFORMANCE</b>				
Energy Efficiency For The Whole Hob (%)	60	58,5	56,8	57,0
<b>ACCESSORIES</b>				
Enamelled Grids	N	N	N	N
Cast Iron Grids	Y	Y	Y	Y
<b>SAFETY SYSTEMS</b>				
Residual Heat Indicator	N	N	N	N
Automatic Safety Device	Y	Y	Y	Y




## HOBS TECHNICAL SPECIFICATIONS

			
<b>MODEL</b>	<b>CGW LUX 60 TC 4G</b>	<b>CGW LUX 90 TC 5G</b>	<b>IG 940 1G</b>
Page	19	20	20
<b>DIMENSIONS</b>			
External (HxWxDmm)	610x512	870x512	880x505
Built In (HxWxDmm)	50x570x480	50x833x475	50x860x490
<b>ELECTRICAL CONNECTION</b>			
Power Supply (V)	230	230	230
Frequency (Hz)	50-60	50-60	50-60
Max, Nominal Power	0,6	1,1	5 (gas)/7200(induction)
<b>GAS CONNECTION</b>			
Maximum Power (kW)	6,95	11,15	7,2
<b>FEATURES</b>			
Triple Ring Burner (4kW)			
Triple Ring Burner (3,1kW)			
Double Ring Burner (5,0kW)			1
Double Ring Burner (4,2kW)		1	
Double Ring Burner (4,0kW)			
Fast Burner (2,8kW)	1	1	
Semi Fast Burner (1,75kW)	1	1	
Semi Fast Burner (1,4kW)	1	1	
Auxiliary Burner (1,0kW)	1	1	
Induction Zone (dia,210mm: 1,5kW - Power 2,0kW)			2
Induction Zone (dia,145mm: 1,2kW - Power 1,6kW)			2
<b>HOB PERFORMANCE</b>			
Energy Efficiency For The Whole Hob (%)	56,8	56,8	61,6
<b>ACCESSORIES</b>			
Enamelled Grids	N	N	N
Cast Iron Grids	Y	Y	Y
<b>SAFETY SYSTEMS</b>			
Residual Heat Indicator	N	N	Y
Automatic Safety Device	Y	Y	Y



			
<b>MODEL</b>	<b>IR 9530</b>	<b>IT 6450</b>	<b>IR 8400</b>
Page	21	21	21
<b>DIMENSIONS</b>			
External (HxWxDmm)	900x510	605x515	800x510
Built In (HxWxDmm)	50x860x490	50x560x490	50x750x490
<b>ELECTRICAL CONNECTION</b>			
Power Supply (V)	230	230	230
Frequency (Hz)	50-60	50-60	50-60
Max Connection Rating (W)	11.000	7.400	7.400
<b>HEATING ZONES</b>			
Front Left	Ø145 1400-1800W	Ø145 1400-1800W	Ø145 1400-1800W
Front Middle	Ø190/300 2500/3700W	~	~
Front Right	Ø180 1800-2500W	Ø180 1800-2500W	Ø180 1800-2500W
Rear Left	Ø210 2300-3200W	Ø210 2300-3200W	Ø210 2300-3200W
Rear Middle	~	~	~
Rear Right	Ø180 1800-2500W	Ø180 1800-2500W	Ø180 1800-2500W
<b>HOB PERFORMANCE</b>			
Energy Consumption For The Whole Hob (Wh/kg)	184	190	184
<b>FUNCTIONS</b>			
iQuick Boiling	Y	Y	N
Simmering	N	N	N
Melting	N	N	N
Keep Warm	Y	Y	N
<b>SAFETY SYSTEMS</b>			
Residual Heat Indicator	Y	Y	Y
Automatic Safety Device	Y	Y	Y

## HOBS TECHNICAL SPECIFICATIONS

			
<b>MODEL</b>	<b>IZF 6424</b>	<b>IB 6415</b>	<b>TT 6415/TB 6415</b>
Page	22	22	23
<b>DIMENSIONS</b>			
External (HxWxDmm)	600x510	600x510	600x510 (605x515mm incl frame)
Built In (HxWxDmm)	50x560x490	50x560x490	63x560x490
<b>ELECTRICAL CONNECTION</b>			
Power Supply (V)	230	230	230
Frequency (Hz)	50-60	50-60	50-60
Max Connection Rating (W)	7.400	7.200	7.400
<b>HEATING ZONES</b>			
Front Left	Flex 235x180 1850-2200W	Ø145 1200-1500W	Ø210 2100W
Front Middle	~	~	~
Front Right	Flex 235x180 1850-2200W	Ø180 1700-2100W	Ø180 1800W
Rear Left	Flex 235x180 1850-2200W	Ø210 2000-2300W	Ø145 1200W
Rear Middle	~	~	~
Rear Right	Flex 235x180 1850-2200W	Ø145 1200-1500W	Ø145 1200W
<b>HOB PERFORMANCE</b>			
Energy Consumption For The Whole Hob (Wh/kg)	190	181	188.88
<b>FUNCTIONS</b>			
iQuick Boiling	N	N	N
Simmering	Y	N	N
Melting	Y	N	N
Keep Warm	Y	N	N
<b>SAFETY SYSTEMS</b>			
Residual Heat Indicator	Y	Y	Y
Automatic Safety Device	Y	Y	Y





## Hoods:

Delicious aromas with no unpleasant fumes or smells. So discreet you can hardly see them, so beautiful they look like works of art.

Teka has a hood for every need. Which one do you prefer? You can choose from a wide range of models from stylish island to decorative glass wing or pull-out.



## HOOD FEATURES



### Ultra slim

The optimisation of the manufacturing process has allowed extra-thin design with a height of 45mm of the body, allowing you to tailor your kitchen to the purest design.



### Filter saturation display

Some Teka models have an electronic display that tells you when the anti-grease filters should be washed to maintain optimum performance.



### Low noise

Teka motors have an optimised design of both motor and fan. This results in a substantial reduction in sound levels.



### Rim extraction

This system provides more consistent hood suction, minimizing its consumption. Furthermore, since its open surface is smaller the noise levels are lower, only 40 dB(A),



### Stop delay timer

Thanks to the timer, extraction time can be easily controlled and the hood turns off automatically once the selected time is over.




Eco Power: Our most efficient, quietest motor on selected models




LTK5600/LTK5602/ LTK5604

## DVT 685/785/985

ANGLED CHIMNEY HOOD  
(60CM/70CM/90CM)



- Touch control with white display
- EcoPower motor
- Rim extraction
- 3 speeds + 1 intensive
- Exhaust capabilities:
  - Qboost (m<sup>3</sup>/h): 786
  - Max (m<sup>3</sup>/h): 599
  - Min (m<sup>3</sup>/h): 303
- Noise (LwA) max speed 66dB
- Noise (LwA) min speed 52dB
- 2 LED lamps
- 1 glass panel; aluminium filter below
- Stop delay timer
- Filter saturation indicator

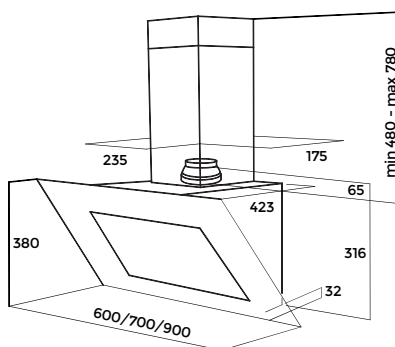

## CHIMNEY HOODS




LTK5562/5564

## NC 680/980

CURVED GLASS HOOD  
(60CM/90CM)



- Eco power
- Backlit electronic control with white display
- 3 Speeds + 1 intensive
- LED illumination
- Stop delay timer
- Stainless steel/aluminium filter
- Reinforced glass upper structure
- Sound level: min. 52dBA, max. 70dBA
- Max exhaust capability: 637m<sup>3</sup>/h

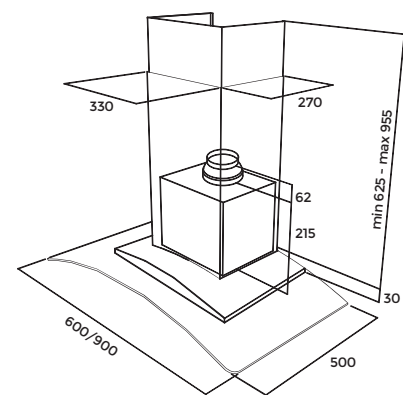



## CHIMNEY HOODS




LTK5032/LTK5034/LTK5036

### DC 650/750/950

FLAT GLASS HOOD  
(60CM/70CM/90CM)



- Push button control panel
- Operating pilot light
- 3 Speeds
- Integrated halogen lamps
- 1 Aluminium filter
- Reinforced glass upper structure
- Sound level: min. 49dBA, max. 64dBA
- Max exhaust capability: 380m<sup>3</sup>/h

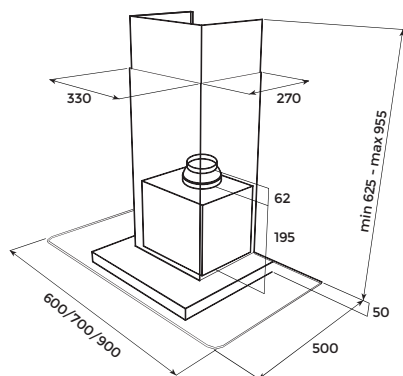


LTK5008/LTK5010/LTK5012

### DBB 60/70/90SS

TRADITIONAL CHIMNEY HOOD  
(60CM/70CM/90CM)



- Available in 60, 70 and 90cm wide
- Push button control panel
- Double turbine motor
- Extraction capabilities:
  - Free outlet - 475m<sup>3</sup>/h
  - Max. - 380m<sup>3</sup>/h
- 3 Speeds
- Candle lamps
- 2/2/3 Aluminium filters
- Max sound level: 60dBA

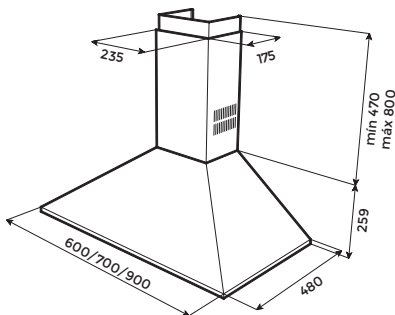


LTK5038/LTK5040/LTK5042

### DSJ 650/750/950

T-SHAPE HOOD  
(60CM/70CM/90CM)



- Available in 60, 70 and 90cm wide
- Push button control panel
- Extraction capabilities:
  - Free outlet - 475m<sup>3</sup>/h
  - Max. - 380m<sup>3</sup>/h
- 3 Speeds
- 2 x 1.5w LED lamps
- 2/2/3 Aluminium filters
- Max sound level: 64dBA

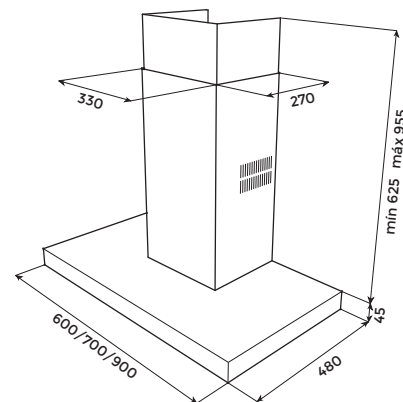





LTK5522

## DH2 90 ISLAND

T-SHAPE ISLAND HOOD (90CM)



- Back lit electronic panel
- 3 Speeds + 1 intensive
- Halogen lamps
- Stop delay timer
- 4/3 Stainless steel/aluminium filters
- Easy clean inside panel
- Sound level: min. 48dBA, max. 56dBA
- Max exhaust capability: 650m<sup>3</sup>/h

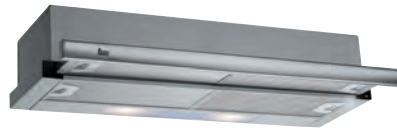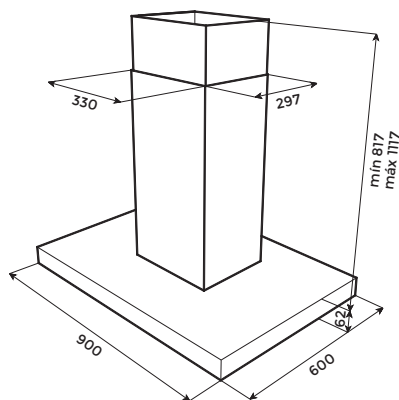


LTK5400/LTK5566

## TL 6310/TL 9310

TELESCOPIC HOOD  
(60CM/90CM)



- Mechanical control panel
- 2 speeds
- Exhaust capabilities:
  - Free outlet (m<sup>3</sup>/h): 366
  - Max (m<sup>3</sup>/h): 332
  - Min (m<sup>3</sup>/h): 233
- Noise (LwA) max speed 65dB
- Noise (LwA) min speed 56dB
- 2 halogen lamps
- 4/2 aluminium filters
- Automatic lighting
- Exchangeable front panel

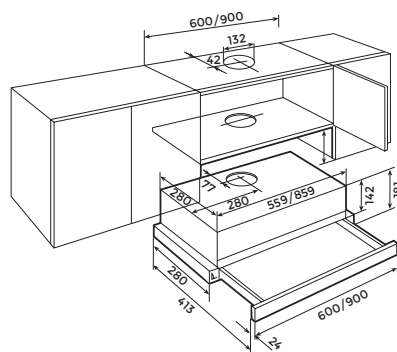

## CANOPY AND INTEGRATED HOODS




LTK5538/LTK5532

### GFH 55/73

CANOPY HOOD  
(55CM/73CM)



- Push buttons control panel
- Operating pilot light
- 3 Speeds
- Exhaust capacities:
- Free Outlet (m³/h): 367
- Max. (m³/h): 329
- Min. (m³/h): 223
- Noise (LwA) max. speed: 69dB
- Noise (LwA) min. speed: 62dB
- Integrated halogen lamps
- 2 Aluminium filters

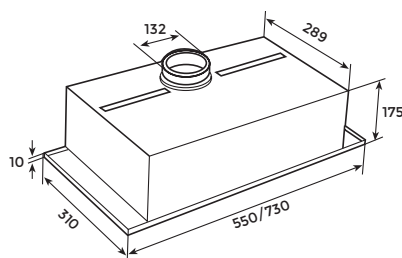


LTK5002

### NR1 89

INTEGRATED HOODS



- Slider control panel
- White in colour
- Extraction capabilities:
- Free outlet - 508m³/h
- Max. - 223m³/h
- 3 Speeds
- Integrated candle style lights
- Operating pilot light
- Max sound level: 65dBA

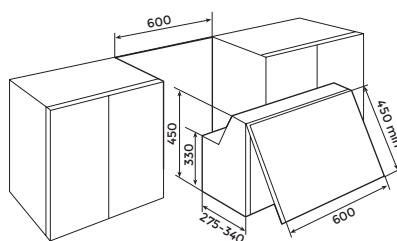

Please see page 31 for symbol guide

**DVT 685/785/985****NC 680/980****DG 650/750/950**

MODEL			
Page	31	31	32
<b>TECHNICAL SPECIFICATIONS</b>			
Voltage (V)	220-240	220-240	220-240
Frequency (Hz)	50-60	50-60	50-60
Motor Power (W)	280	230	105
Total Hood Power (W)	286	236	145
Number & Motor Type	1 DT	1 DT	1 DT
Diameter Outlet (mm)	150	150	150
Energy Efficiency Class	A	D	E
Air Flow (Qmin) m <sup>3</sup> /h	303	298	234
Air Flow (Qmax) m <sup>3</sup> /h	599	402	380
Air Flow (Qboost) m <sup>3</sup> /h	786	637	0
Noise (LwA) Min Speed, dB	52	52	49
Noise (LwA) Max Speed, dB	66	60	64
Noise (LwA) Boost Speed, dB	71	70	0
Off Mode Power Po (W)	0	0	0
Standby Power Ps (W)	0.74	0.56	0
<b>FEATURES</b>			
Control Panel	Touch control with white display	Backlit electronic control with display	Push Buttons
No. of Speeds	3+1	3+1	3
Stop Delay Timer	Y	Y	~
Filter Saturation Indicator	Y	Y	~
Lamp Type	LED	LED	Halogen
No. Lamps	2 x 3W	2 x 3W	2 x 20W
Filter Type	Glass panel, Aluminium filter below	Stainless Steel	Aluminium
No. of Filters	1	1	1
<b>ACCESSORIES</b>			
Anti Return Valve	Y	Y	Y
Outlet Reduction 150/120mm	Y	Y	Y
Outlet Extension 120/120mm	~	~	~
Charcoal Filter Optional	D4C + Adapter	D4C	D4C
Recirculation Kit Optional	SET 1/M+ Adapter	SET 1/N	SET 1/N

## HOODS TECHNICAL SPECIFICATIONS



**DBB 60/70/90SS**



**DSJ 650/750/950**



**DH2 90**

MODEL			
Page	32	32	33
<b>TECHNICAL SPECIFICATIONS</b>			
Voltage (V)	220-240	220-240	220-240
Frequency (Hz)	50-60	50-60	50-60
Motor Power (W)	115	105	230
Total Hood Power (W)	195	145	310
Number & Motor Type	1 DT	1 DT	1 DT
Diameter Outlet (mm)	150	150	150
Energy Efficiency Class	E	E	D
Air Flow (Qmin) m3/h	234	234	295
Air Flow (Qmax) m3/h	380	380	400
Air Flow (Qboost) m3/h	0	0	650
Noise (LwA) Min Speed, dB	44	49	49.9
Noise (LwA) Max Speed, dB	60	64	55.8
Noise (LwA) Boost Speed, dB	0	0	66.2
Off Mode Power Po (W)	0	0	0
Standby Power Ps (W)	0	0	1.1
<b>FEATURES</b>			
Control Panel	Push Buttons	Push Buttons	Backlit electronic control with display
No. of Speeds	3	3	3+1
Stop Delay Timer	~	~	Y
Filter Saturation Indicator	~	~	~
Lamp Type	Incandescent	LED	Halogen
No. Lamps	2 x 40W	2 x 1.5W	4 x 20W
Filter Type	Aluminium	Aluminium	Aluminium
No. of Filters	2/2/3	2/2/3	3/4
<b>ACCESSORIES</b>			
Anti Return Valve	Y	Y	Y
Outlet Reduction 150/120mm	Y	Y	Y
Outlet Extension 120/120mm	~	~	~
Charcoal Filter Optional	D4C	D4C	D4C
Recirculation Kit Optional	SET 1/M	SET 1/N	SET 1/D





MODEL	TL 6310/9310	GFH 55/73	NR1 89
Page	33	34	34
<b>TECHNICAL SPECIFICATIONS</b>			
Voltage (V)	230	230	230
Frequency (Hz)	50	50	50
Motor Power (W)	175	175	125
Total Hood Power (W)	231	215	205
Number & Motor Type	1 DT	1 DT	1 DT
Diameter Outlet (mm)	120	120	120
Energy Efficiency Class	E	E	E
Air Flow (Qmin) m <sup>3</sup> /h	233	223	152
Air Flow (Qmax) m <sup>3</sup> /h	332	329	223
Air Flow (Qboost) m <sup>3</sup> /h	0	0	0
Noise (LwA) Min Speed, dB	56	62	63
Noise (LwA) Max Speed, dB	65	69	65
Noise (LwA) Boost Speed, dB	0	0	0
Off Mode Power Po (W)	0	0	0
Standby Power Ps (W)	0	0	0
<b>FEATURES</b>			
Control Panel	Mechanical	Push Buttons	Slider
No. of Speeds	2	3	3
Stop Delay Timer	~	~	~
Filter Saturation Indicator	~	~	~
Lamp Type	Halogen	Halogen	Incandescent
No. Lamps	2 x 28W	2 x 20W	2 x 40W
Filter Type	Aluminium	Aluminium	Metallic
No. of Filters	4/2	2	1
<b>ACCESSORIES</b>			
Anti Return Valve	Y	~	~
Outlet Reduction 150/120mm	~	~	~
Outlet Extension 120/120mm	Y	Y	N
Charcoal Filter Optional	C3C	C3C	C5C
Recirculation Kit Optional	~	~	~



## Refrigeration:

Take real care of your health by taking care of your fresh food.

Teka refrigerators deliver outstanding performance with up to A++ energy consumption. Thanks to No Frost technology and its Antibacterial System, your food will always be kept fresh.

## REFRIGERATION FEATURES



### Real energy efficiency

Our range of fridges and freezers has been designed with efficiency in mind. Save money with the most advanced technology. Moreover, using R600A, an eco-friendly refrigerant, your refrigerator has less impact on the environment.



### Frost free

Keeps inside temperatures constant in all trays and compartments. Prevents ice and frost from building up on the walls and food.



### Conservation zone (0-3°C)

An extractable covered compartment with a sensor and evaporator which sits on top of the vegetable drawer and ensures a constant temperature between 0° and 3°C to retain all the nutritive properties of foods.



### Antibacterial protection

A special treatment applied to the inside of the product to prevent the build up of bacteria and micro-organisms inside refrigeration.



LTK6014


## TKI4 340 SD

70/30 FRIDGE FREEZER



- Sliding door system
- Automatic defrost in refrigerator section
- Adjustable thermostat in refrigerator
- Cool flow fan in refrigerator section
- Indicator light for on/off
- Indicator light for freezer temp and fast freeze
- Adjustable safety glass shelves
- Anti-bacterial system
- Reversible doors
- 3 freezer drawers
- Total capacity: 271 litres net
- Capacity: Fridge 193 litres, freezer 78 litres
- Energy efficiency class: A+
- Comes with British standard plug

Picture above for illustration purposes only, model may vary slightly on the fridge interior.

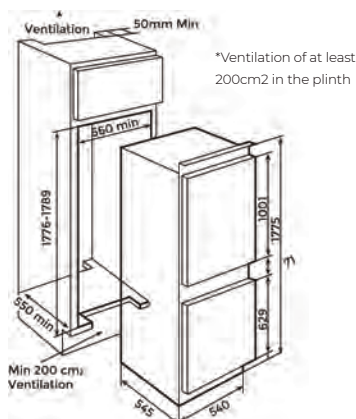

## BUILT-IN REFRIGERATION



LTK6012


## TKI4 350 SD

50/50 FRIDGE FREEZER



- Sliding door system
- Automatic defrost in refrigerator section
- Adjustable thermostat in refrigerator
- Cool flow fan in refrigerator section
- Indicator light for on/off
- Indicator light for freezer temp and fast freeze
- Adjustable safety glass shelves
- Anti-bacterial system
- Reversible doors
- 3 clear fronted freezer drawers and 1 lidded compartment
- Total capacity: 258 litres net
- Capacity: Fridge 156 litres, freezer 102 litres
- Energy efficiency class: A+
- Comes with British standard plug

Picture above for illustration purposes only, model may vary slightly on the fridge interior.

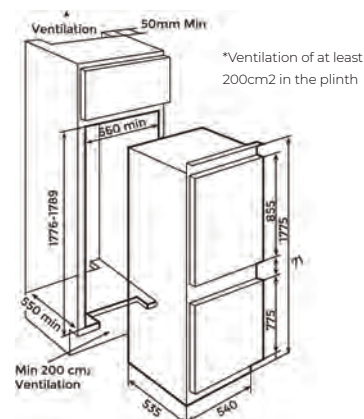



## BUILT-IN REFRIGERATION




LTK6506

### TGI2 200 NF

BUILT-IN FROST FREE FREEZER



- Frost free freezer
- Electronic control panel
- Fast freezing switch
- Adjustable thermostat
- 8 Separate compartments
- Ice cube tray
- Reversible door
- 4\* Freezer
- Energy efficiency class: A+
- Total gross capacity: 220 litres
- Net capacity: 196 litres
- Complements TKI2 300 perfectly for side by side installation as shown above

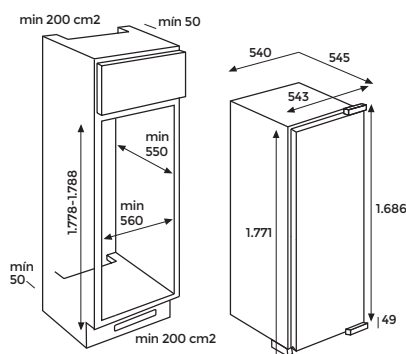


LTK6508

### TKI2 300

BUILT-IN REFRIGERATOR



- Automatic defrost
- Chromed bottle holder for 4 bottles
- Antibacterial system
- Adjustable safety glass shelves
- Transparent grocery drawers
- Inner light
- Reversible door
- Energy efficiency class: A+
- Total gross capacity: 315 litres
- Net capacity: 310 litres
- Complements TGI2 200 NF perfectly for side by side installation as shown above

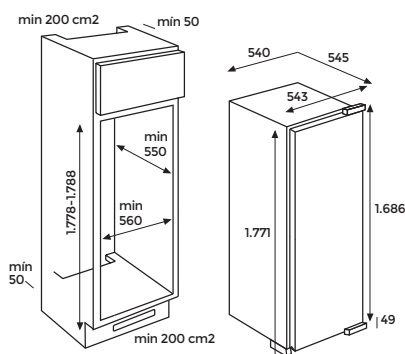




LTK6526

### TKI3 145 D

BUILT-UNDER LARDER FRIDGE

A<sup>++</sup>

- Reversible door
- Manual defrost
- Safety glass shelves
- Gross capacity: 130 litres
- Net capacity: 128 litres
- Energy efficiency class: A<sup>++</sup>

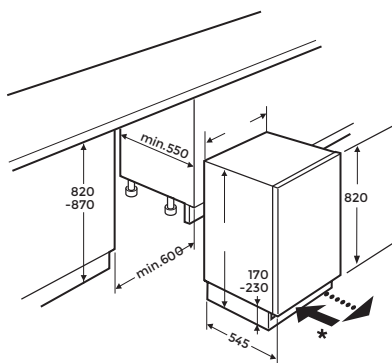


LTK6530

### TFI3 130 D

BUILT-UNDER FRIDGE  
WITH ICE BOX

A<sup>++</sup>

- 4\* Freezer
- Reversible door
- Safety glass shelves
- Freezing capacity: 2kg / 24 hours
- Gross capacity: 125 litres
- Net fridge capacity: 92 litres
- Net ice box capacity: 15 litres
- Energy efficiency class: A<sup>++</sup>

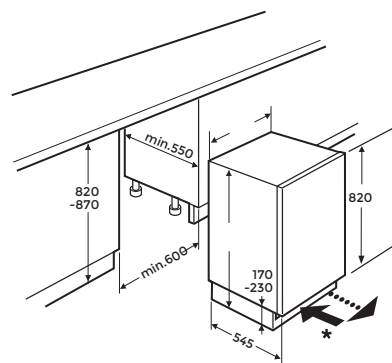


LTK6520

### TGI2 120 D

BUILT-UNDER FREEZER

A<sup>+</sup>

- 4\* Freezer
- Reversible door
- 3 Clear drawers
- Freezing capacity: 10kg / 24 hours
- Gross capacity: 96 litres
- Net capacity: 87 litres
- Energy efficiency class: A<sup>+</sup>

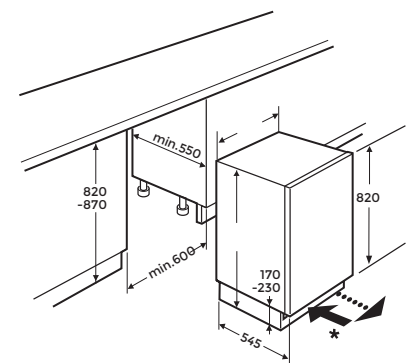

## COOLING TECHNICAL SPECIFICATIONS



MODEL	TKI4 340 SD	TKI4 350 SD	TGI2 200 NF
Page	39	39	40
<b>OVERALL MEASUREMENTS</b>			
Height (mm)	1776	1770	1771
Width (mm)	540	540	543
Depth (mm)	535	535	545
Net Weight (kg)	58	58	61
Upper Door Height (mm)	1006X540	850X540	-
Bottom Door Height (mm)	600X540	760X540	1800
<b>TECHNICAL SPECIFICATIONS</b>			
Voltage (V)	230	230	230
Power Rate (W)	100	90	110
Energy Consumption (kWh/24 hrs)	0,8	0,74	0,813
Total Gross Capacity (Litres)	283	244	220
Fridge Net Capacity (Litres)	189	155	-
Freezer Net Capacity (Litres)	55	69	196
Freezing Capacity (kg/24 hrs)	4	4	10
Noise Level (dBA)	38	38	42
<b>FEATURES</b>			
Electronic Control	-	-	Y
Antibacterial Treatment	Y	Y	-
Fast Freeze/ Fast Cooling Function	Y	Y	Y/-
Adjustable Thermostat	Y	Y	Y
Inner Light	Y	Y	-
Adjustable Shelves	Y	Y	-
Reversible Doors	Y	Y	Y
<b>ACCESSORIES</b>			
Safety Glass Shelves	Y	Y	-
Ice Cube Trays	-	-	Y
Chromed Bottle Rack	-	-	-
Dairy Covered Compartment	Y	N	-
Vegetable Drawers	Y	Y	-
<b>ENERGY EFFICIENCY</b>			
Energy Class	A+	A+	A+
Climate Class	SN-T	SN-T	SN-T



## COOLING TECHNICAL SPECIFICATIONS



### MODEL

Page

TKI2 300

40

TKI3 145 D

41

TFI3 130 D

41

TGI2 120 D

41

### OVERALL MEASUREMENTS

Height (mm)

1771

820

820

820

Width (mm)

543

598

598

598

Depth (mm)

545

545

545

545

Net Weight (kg)

55

30

31

31

Upper Door Height (mm)

-

-

-

-

Bottom Door Height (mm)

1800

813-863

813-863

813-863

### TECHNICAL SPECIFICATIONS

Voltage (V)

230

230

230

230

Power Rate (W)

75

50

65

55

Energy Consumption (kWh/24 hrs)

0,4

0,252

0,392

0,501

Total Gross Capacity (Litres)

315

130

125

96

Fridge Net Capacity (Litres)

310

128

92

-

Freezer Net Capacity (Litres)

-

-

15

87

Freezing Capacity (kg/24 hrs)

-

-

2

6

Noise Level (dBA)

34

40

43

42

### FEATURES

Electronic Control

Y

-

-

Y

Antibacterial Treatment

Y

-

-

-

Fast Freeze/ Fast Cooling Function

-

-

-

-

Adjustable Thermostat

Y

Y

Y

Y

Inner Light

Y

Y

Y

-

Adjustable Shelves

Y

Y

Y

-

Reversible Doors

Y

Y

Y

Y

### ACCESSORIES

Safety Glass Shelves

Y

Y

Y

-

Ice Cube Trays

-

-

-

-

Chromed Bottle Rack

Y

-

-

-

Dairy Covered Compartment

-

-

-

-

Vegetable Drawers

Y

-

-

-

### ENERGY EFFICIENCY

Energy Class

A+

A++

A++

A+

Climate Class

SN-T

SN-T

SN-T

SN-T



## Dishwashers: Gentle washing, guaranteeing brilliant results.

Taking real care of the environment is possible due to the low energy and water consumption of Teka dishwashers.



## DISHWASHING FEATURES



### Save money on your energy bill

Their advanced technology will not only get the best cleaning results but will also reduce energy consumption, the CO<sub>2</sub> emissions and will take care of the household economy as well.



### Eco

Eco is a specific programme to save energy with the best wash results.



### Quick wash

Teka dishwashers can reduce washing time up to 60% with its fast programmes. At Teka, we have designed an extra fast 25-minute programme to wash lightly soiled loads.



### 3 in 1 ready

This system recognises its use through sensors, blocking the salt and rinse aid intake arranging efficiently the intake supplied by the tablet.



### Aquastop

You will never have overflows at home! The Full Aquastop System detects any leaks inside the appliance and closes the water inlet (outer safety), ensuring 100% safety in the dishwasher.



### Digital display

Teka integrated dishwashers are equipped with an electronic control panel that incorporates a digital display to keep you informed of selected functions.



### Digital programming

Take advantage of more economic night rates by delaying the programme up to 24 hours. As a result, the dishwasher will be ready when needed.



### Auto programme

Don't worry about choosing the right programme any longer! The Auto Programme selects the right temperature, wash cycles and right amount of water required in order to use the best programme, with perfect results and the lowest energy and water consumption.



## DISHWASHERS




LTK7006

### DW1 455 FI

FULLY INTEGRATED SLIMLINE DISHWASHER



- 10 Place settings
- Electronic control panel
- LED display
- 6 Washing programmes
- 5 Temperature settings
- Water softener
- 40 Minute fast programme
- Timer delay
- Eco programme
- Aquastop
- Back feet adjustable from the front
- Noise level: 49dA
- Energy rated: A+/A

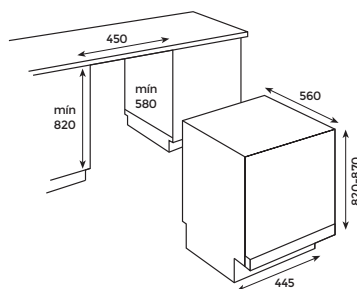


LTK7008

### DW1 605 FI

FULLY INTEGRATED DISHWASHER



- 12 Place settings
- Electronic control panel
- LED display
- 6 Washing programmes
- 5 Temperature settings
- 3 in 1 Selector
- 40 Minute fast programme
- 3,6 & 9 hour timer delay
- Eco programme
- Full Aquastop
- Back feet adjustable from the front
- Noise level: 49dA
- Energy rated: A++/A

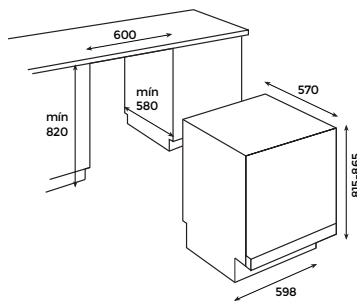


LTK7512

### DW9 70 FI

FULLY INTEGRATED DISHWASHER



- 14 Place settings
- Electronic control panel
- LED display
- 8 Washing programmes
- 5 Washing temperatures:
- 45 / 50 / 55 / 60 / 65°C
- Quick wash, Eco wash, Auto wash
- Aqualogic (water dirtiness sensor)
- Extra dry program
- 1-24 hour timer delay
- Eco programme
- Control pilot lights, on/off, low salt led indicator, low rinse aid led indicator, selected programme, delay time
- Adjustable upper basket
- Cutlery tray
- Beam on floor
- Full Aquastop
- Adjustable back feet from front
- Noise level: 44dBA
- Energy/drying efficiency class: A+++/A

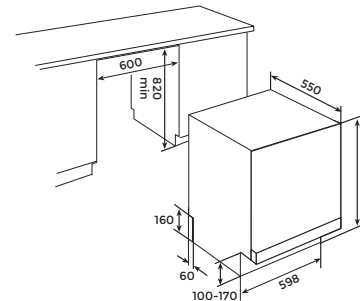

## DISHWASHERS TECHNICAL SPECIFICATIONS

Model	DW1 455 FI	DW1 605 FI	DW9 70 FI
Page	46	46	46
<b>OVERALL MEASUREMENTS</b>			
Height (mm)	820/870	815/865	815/865
Width (mm)	445	598	598
Depth (mm)	560	550	550
Integrated Door Height (mm)	655/710	655/710	655/710
Integrated Door Width (mm)	445	598	598
<b>TECHNICAL SPECIFICATIONS</b>			
Power Supply (V/Hz)	220-240/50	220-240/50	220-240/50
Power Rate (W)	2100	2100	2100
Energy Consumption Per Year (kWh)	211	258	237
Capacity (Place Settings)	10	12	14
Standard Programme	ECO	ECO	ECO
Cycle Duration	175	185	220
Noise Level (dBA)	49	49	44
<b>FEATURES</b>			
Electronic Control	Y	Y	Y
Digital Display	Y	Y	Y
No. of Programmes	6	6	8
No. Wash Temperatures	5	5	6
Half Load Programme	Y	Y	Y
Economic Programme	Y	Y	Y
3 in 1 Selector	-	Y	Y
Aqua-Logic	-	-	Y
Water Softener	Y	Y	Y
Micro Filter	Y	Y	Y
'In Operation' Floor Beam	-	-	Y
<b>SAFETY SYSTEM</b>			
AquaStop	Y	Y	Y
Overflow	Y	Y	Y
Airbreak (Entry/Filling,Draining)	Y	Y	Y
Internal Leakage Control	Y	Y	Y
<b>EQUIPMENT</b>			
3rd Sprayer	Y	-	Y
Adjustable Upper Basket	-	Y	-
3rd Basket	-	-	Y
Adjustable Feet Front/Back	Y	Y	Y
Foldable Racks on Bottom Tray	Y	Y	Y
<b>ENERGY EFFICIENCY</b>			
Energy Class	A++	A++	A+++
Drying Efficiency	A	A	A





**Laundry:**  
A SPA for your most  
delicate garments with  
maximum energy saving.



## LAUNDRY FEATURES



### Energy label

This rating system consists of 7 different categories from A+++ (more efficient) to D (less efficient). Loading capacity is taken into consideration when calculating the energy rating.



### Delayed programming

Programme commencement can be delayed up to 24 hours to take advantage of more economic night rates and to start a wash without having to check on the washing machine.



### Speed wash

Quick wash programme that washes clothes in 15 minutes at a temperature of 40°C.



### Fuzzy Logic

The Fuzzy Logic system manages all washing processes electronically. This system corrects any irregularities that might be found throughout the programme.

## LAUNDRY



LTK8000

### LI3 1470E

FULLY INTEGRATED WASHER



- Colour white
- LCD display
- Electronic control panel
- 16 Washing programmes
- Delay timer programming from 1-24 hours
- Fast programme 15 minutes
- Automatic water regulation
- Electronic washing management (fuzzy logic)
- Maximum spin speed 1400rpm
- 31cm Wide crystal porthole
- Washing capacity: 7kg
- Noise level (washing/spinning): 57 / 75dBA
- Washing energy efficiency class: A+++
- Spinning energy efficiency class: B





LTK8100

### LSI5 1480

FULLY INTEGRATED WASHER/DRYER



- Colour white
- Electronic control with red display
- 13 Washing programmes, 2 drying programmes
- Delay timer programming from 1-24 hours
- Fast programme 14 minutes
- Stainless steel drum
- 35cm wide crystal door
- Washing capacity: 8Kg
- Drying Capacity: 5kg
- Spinning speeds: 1400-1000-800-600
- Energy Class: A/A/A

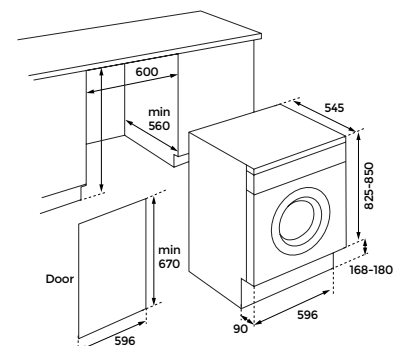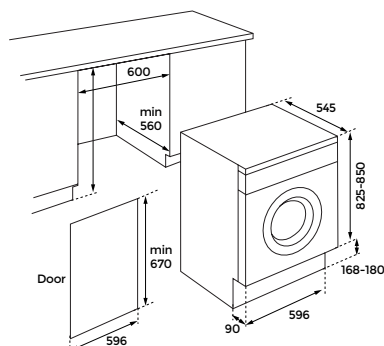

## LAUNDRY TECHNICAL SPECIFICATIONS

Model	LI3 1470E	LSI5 1480
Page	49	49
<b>OVERALL MEASUREMENTS</b>		
Height (mm)	820/850	820
Width (mm)	596	596
Depth (mm)	560	570
Integrated Door Height (mm)	670	670
Integrated Door Width (mm)	596	596
<b>TECHNICAL SPECIFICATIONS</b>		
Power Supply (V/Hz)	220-240/50	220/240
Maximum Nominal Power (W)	2050	1600
Power of Heating Element (kW)	1800	1600
Power of Drying Resistance (W)	-	1300
Maximum Spin Speed (rpm)	1400	1400
Washing Capacity (kg)	7	8
Drying Capacity (kg)	-	5
Energy Consumption (Kwh/Cycle)	0.81	1/1
Water Consumption (Litres)	108	118
<b>FEATURES</b>		
Electronic Control	Y	Y
Fuzzy Logic Function	Y	Y
Number of Programmes	16	13+2
Delayed Door Opening	Y	N
Automatic Water Regulation	Y	Y
Spinning Exclusion	Y	Y
31/35cm Wide Crystal Door	31cm	35cm
Reversible Door	Y	N
Condenser Dryer	-	-
Stainless Steel Door	-	-
<b>SPECIAL FUNCTIONS</b>		
Fast Programme	Y	Y
Delicate Fabrics	Y	Y
Resistant Fabrics	Y	Y
Delicate Spin	Y	Y
Easy Ironing/ Rinse Hold	Y/Y	N
Extra Rinse Button	Y	Y
<b>ENERGY EFFICIENCY</b>		
Energy Efficiency	A+++	A
Washing Efficiency	A+++	A
Spinning Efficiency	B	A







## Sinks & Taps Range

Our stylish sinks and taps use the highest quality materials and we offer a 75 year warranty on all our stainless steel sinks.



### PREMIUM 1B 1D

CTK1088

#### INSET SINGLE BOWL, SINGLE DRAINER SINK

- Polished finish
- Reversible
- Size: 860 x 500mm
- Bowl: 340 x 400 x 200mm
- For 45cm and above base units
- Supplied with pop-up waste with overflow and white glass chopping board as standard
- Extra sturdy 1mm gauge stainless steel bowl



### PREMIUM 1.5B 1D

CTK1090

#### INSET ONE AND A HALF BOWL, SINGLE DRAINER SINK

- Polished finish
- Reversible
- Size: 1000 x 500mm
- Bowl 1: 340 x 400 x 180mm
- Bowl 2: 180 x 270 x 135mm
- For 60cm and above base units
- Supplied with pop-up waste with overflow and white glass chopping board as standard
- Supplied with universal plumbing kit



### STENA 45 1B 1D

CTK1084

#### INSET SINGLE BOWL, SINGLE DRAINER SINK

- Polished finish
- Reversible
- Size: 860 x 500mm
- Bowl: 340 x 400 x 200mm
- For 45cm and above base units



### STENA 60 1.5B 1D

CTK1086

#### INSET ONE AND A HALF BOWL, SINGLE DRAINER SINK

- Polished finish
- Reversible
- Stainless steel colander (optional)
- Size: 980 x 500mm
- Bowl 1: 340 x 400 x 169mm
- Bowl 2: 170 x 320 x 99mm
- For 60cm and above base units



### CLASSIC 1B 1D 86 (40)

CTK1032BOX

#### INSET SINGLE BOWL, SINGLE DRAINER SINK

- Polished finish
- Reversible
- Size: 860 x 500mm
- Bowl: 406 x 406 x 200mm
- For 50cm and above base units



### CLASSIC 1B 1D 86 (45)

RH - CTK1038 LH - CTK1036

#### INSET SINGLE MAX BOWL, SINGLE DRAINER SINK

- Polished finish
- Available left or right handed
- Size: 860 x 500mm
- Extra large bowl: 450 x 406 x 200mm
- For 60cm and above base units



## SINKS



### PRINCESS 1.5B 1D

CTK1050BOX

#### INSET SINGLE MAX BOWL, SINGLE DRAINER SINK

- Polished finish
- Reversible
- Micro texture finish also available
- Size: 1000 x 500mm
- Bowl 1: 340 x 420 x 162mm
- Bowl 2: 185 x 280 x 133mm
- For 60cm and above base units



### CENTROVAL 45

CTK1048

#### INSET ROUND BOWL SINK WITH TAP DECK

- Polished finish
- Size: 510mm diameter
- Bowl: 385mm diameter x 184mm
- For 50cm and above base units



### UNIVERSO 1B 1D 79

CTK1054BOX

#### COMPACT INSET SINK WITH SINGLE BOWL AND SINGLE DRAINER

- Polished finish
- Reversible
- Size: 790 x 500mm
- Bowl: 340 x 400 x 170mm
- For 45cm and above base units



### UNIVERSO 1B 1D 86

CTK1056BOX

#### INSET SINK WITH SINGLE BOWL AND SINGLE DRAINER

- Polished finish
- Reversible
- Size: 860 x 500mm
- Bowl: 340 x 400 x 170mm
- For 45cm and above base units



### UNIVERSO 1.5B 1D

CTK1058BOX

#### INSET SINK WITH ONE AND A HALF BOWLS AND SINGLE DRAINER

- Polished finish
- Reversible
- Size: 1000 x 500mm
- Bowl 1: 340 x 400 x 160mm
- Bowl 2: 170 x 320 x 95mm
- For 60cm and above base units



### UNIVERSO 60

CTK1076 BLACK

#### INSET SINK WITH BOWL, HALF BOWL AND SINGLE DRAINER

- Composite granite
- Reversible
- Size: 1000 x 500mm
- Bowl 1: 349 x 394 x 200mm
- Bowl 2: 152 x 307 x 122mm
- For 60cm and above base units
- Comes with pop up waste

**BE 40.40**

CTK2008

**UNDERMOUNT SINGLE BOWL**

- Size: 424 x 424mm
- Bowl: 400 x 400 x 180mm
- For 45cm and above base units

**BE 45.40**

CTK2010

**UNDERMOUNT SINGLE BOWL**

- Size: 470 x 420mm
- Bowl: 450 x 400 x 200mm
- For 60cm and above base units

**BE 50.40**

CTK2012

**UNDERMOUNT SINGLE BOWL**

- Size: 522 x 422mm
- Bowl: 500 x 400 x 155mm
- For 60cm and above base units

**BE 50.40 PLUS**

CTK2014

**UNDERMOUNT SINGLE BOWL**

- Size: 530 x 430mm
- Bowl: 500 x 400 x 200mm
- For 60cm and above base units

**BE 039**

CTK2018

**UNDERMOUNT SINGLE BOWL**

- Size: 390mm diameter
- Bowl: 385mm diameter x 150mm
- For 45cm and above base units

**BE 1.5B 625**

CTK2022

**UNDERMOUNT ONE AND A HALF BOWL**

- Reversible
- Size: 624 x 464mm
- Bowl 1: 340 x 400 x 200mm
- Bowl 2: 180 x 270 x 125mm
- For 70cm and above base units

**ERC**

CTK1046

**INSET ROUND BOWL SINK**

- Polished finish
- Size: 450mm diameter
- Bowl: 385mm diameter x 175mm
- For 45cm and above base units

## SINKS

### THE R15 SINK RANGE

Manufactured in a single process with tight 15 degree radius corners for a contemporary finish.



#### R15 180.400

CTK2046

##### UNDERMOUNT SINGLE BOWL

- 15mm radius corners
- Size: 217 x 437mm
- Bowl: 180 x 400 x 140mm
- For 45cm and above base units



#### R15 400.400

CTK2050

##### UNDERMOUNT SINGLE BOWL

- 15mm radius corners
- Size: 440 x 440mm
- Bowl: 180 x 400 x 200mm
- For 50cm and above base units



#### R15 15B 580

RH - CTK2058

##### UNDERMOUNT SINGLE BOWL

- 15mm radius corners
- Size: 580 x 440mm
- Bowl 1: 340 x 400 x 200mm
- Bowl 2: 180 x 400 x 200mm
- For 60cm and above base units



#### R15 450.400

CTK2052

##### UNDERMOUNT SINGLE BOWL

- 15mm radius corners
- Size: 490 x 440mm
- Bowl: 450 x 400 x 200mm
- For 60cm and above base units



#### R15 500.400

CTK2054

##### UNDERMOUNT SINGLE BOWL

- 15mm radius corners
- Size: 540 x 440mm
- Bowl: 500 x 400 x 200mm
- For 60cm and above base units



#### R15 710.400

CTK2056

##### UNDERMOUNT SINGLE BOWL

- 15mm radius corners
- Size: 747 x 437mm
- Bowl: 710 x 400 x 200mm
- For 90cm and above base units



Top Mount taps are quick and easy to install by one person from above the worktop in under 3 minutes. Our patented locking mechanism gives outstanding stability without leakage or movement over time.



### TTM 105C

BTK301

#### TOP MOUNT SINGLE LEVER MIXER TAP

- Swivel swan neck spout
- Chrome finish
- Height: 362mm
- 35mm cartridge to enhance flow
- Suited for: 0.5-5 bar pressure



### TTM 106C

BTK302

#### TOP MOUNT SINGLE LEVER MIXER TAP

- Swivel swan neck spout
- Chrome finish
- Height: 393mm
- 35mm cartridge to enhance flow
- Suited for: 0.5-5 bar pressure



### TTM 108C

BTK304

#### TOP MOUNT SINGLE LEVER PRO STYLE SPRAY TAP

- Movable spray spout
- Chrome finish
- Height: 450mm
- 35mm cartridge to enhance flow
- Suited for: 1-5 bar pressure



### TTM 109N

BTK305

#### TOP MOUNT SINGLE LEVER PRO STYLE SPRAY TAP

- Movable spray spout
- Dual function spray
- Brushed Nickel finish
- Height: 450mm
- 35mm cartridge to enhance flow
- Suited for: 1-5 bar pressure



### TTM 110C

BTK306

#### TOP MOUNT SINGLE LEVER PRO STYLE SPRAY TAP

- Movable spray spout
- Dual function spray
- Chrome finish with black hose
- Height: 427mm
- 35mm cartridge to enhance flow
- Suited for: 1-5 bar pressure



### IC 915

BTK120

#### SINGLE LEVER DESIGNER STYLE TAP

- Swivel spout
- Flat spout design
- Anti scale aerator
- Chrome finish
- Height: 302mm
- Suited for: 0.5-10 bar pressure

## TAPS



### IC 915 BLACK/ WHITE

BTK144 BLACK  
BTK142 WHITE

#### SINGLE LEVER DESIGNER STYLE TAP

- Swivel spout
- Flat spout design
- Anti scale aerator
- Black or white finish
- Height: 302mm
- Suited for: 0.5-10 bar pressure



### ARK 939

BTK124

#### SINGLE LEVER PROFESSIONAL MIXER TAP

- Movable spray spout
- Anti scale aerator
- Chrome finish
- Height: 530mm
- Suited for: 0.5-10 bar pressure



### MY 1 PRO

BTK126

#### SINGLE LEVER PROFESSIONAL MIXER TAP

- Movable spray spout
- Anti scale aerator
- High resistance flexible spring
- Chrome finish
- Height: 535mm
- Suited for: 0.5-10 bar pressure



### SML 102

BTK114

#### DUAL LEVER DESIGNER STYLE TAP

- Swivel spout
- Anti scale aerator
- Chrome finish
- Height: 390mm
- Suited for: 0.3-8 bar pressure



### SME 103

BTK116

#### DUAL CONTROL MIXER TAP

- Swivel spout
- Anti scale aerator
- Chrome finish
- Height: 350mm
- Suited for: 0.3-8 bar pressure



### SMK 104

BTK118

#### DUAL LEVER DESIGNER STYLE TAP

- Swivel spout
- Anti scale aerator
- Chrome finish
- Height: 375mm
- Suited for: 0.3-8 bar pressure



**FO 915**

BTK146

**SINGLE LEVER DESIGNER STYLE TAP**

- Swivel spout
- Anti scale aerator
- Chrome finish
- Height: 290mm
- Suited for: 0.5-10 bar pressure

**FRAME**

BTK150

**SINGLE LEVER DESIGNER STYLE TAP**

- Swivel spout
- Anti scale aerator
- Chrome finish
- Height: 285mm
- Suited for: 0.5-10 bar pressure

**ML**

BTK102

**COMPACT SINGLE LEVER MIXER TAP**

- Swivel spout
- Anti scale aerator
- Chrome finish
- Height: 167mm
- Suited for: 0.5-10 bar pressure

**SP 995**

BTK108

**SINGLE LEVER MIXER TAP**

- Swivel spout
- Anti scale aerator
- Chrome finish
- Height: 261mm
- Suited for: 0.5-10 bar pressure

**ARK 938**

BTK148

**SINGLE LEVER PULL-OUT SPRAY TAP**

- Swivel spout
- Normal and spray use
- Anti scale aerator
- Chrome finish
- Height: 351mm
- 40mm cartridge to enhance flow
- Suited for: 0.5-10 bar pressure

**SMH 101**

BTK112

**DUAL LEVER DESIGNER STYLE TAP**

- Swivel spout
- Normal and spray use
- Anti scale aerator
- Chrome finish
- Height: 365mm
- Suited for: 0.1-8 bar pressure



Teka UK,  
Alder House, Slackey Brow,  
Kearsley, Bolton, BL4 8SL  
Tel: **0845 313 0388**  
Email: **kitchensales@pjh.uk**  
**www.teka.com/en-gb**  
Teka UK is a Sales Division of PJH

For Republic of Ireland,  
KKS, Unit 85, Cherry Orchard Industrial Estate,  
Dublin 10  
Tel: **+353 1 6262 314**  
Fax: **+353 1 6262 316**  
Email: **sales@kks.ie**  
**www.kks.ie**

Due to our policy of continuous improvement, we reserve the right to amend specifications designs and colours without prior notice.  
Whilst every effort has been made to ensure accuracy of the information supplied herein, we cannot be held responsible for any errors or omissions.