TEKA








TEKA

FEATURES

Built-in filter group Electronic control Rim extraction EcoPower motor 3 speeds + 1 intensive Free Outlet exhaust capacity (m3/h): 735 Intensive speed sound level (dBA): 70,1 Max speed sound level (dBA): 68 Min speed sound level (dBA): 54,4 2 LED Lamps 1 aluminium filter with 3 layers Stop delay timer Anti-return valve included Outlet reduction included Optional Charcoal Filter: D4C



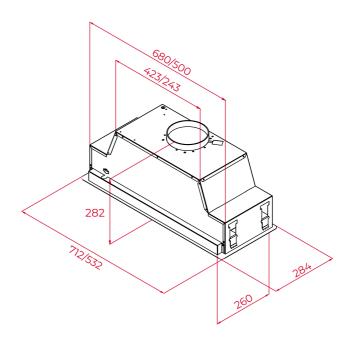

DIMENSIONS

Product height (mm): 282 Product width (mm): 712 Product depth (mm): 284 Product length (mm): Net weight (Kg): 10,8

TECHNICAL DETAILS

FEATURES

Ø Outlet (mm): 150 Type of inner light: LED Inside light Consumption (W): 6 Plug type: Shucko Cable Connection Length (cm): 100 Power rate (V): 220 - 240 Frequency (Hz): 50 Total hood power (W): 278 Number of motors: 1 Motor power (W): 270 Air flow (Qmin) m3/h: 245 Air flow (Qmax): 425 Air flow (Qboost): 760

ACCESSORIES

Anti Return valve: Yes Outlet reduction: Yes Outlet extension: No Optional Charcoal Filter: D4C Regenerative charcoal filter: No Conventional recirculation kit (opt) - w/tube cover: No Regenerative recirculation kit (opt) - w/tube cover: No Conventional recirculation kit (opt) - w/o tube cover: No Regenerative recirculation kit (opt) - w/o tube cover: No

MODELS

Number of filters: 1 Filter description: Aluminum Filter Opening system: Manual Control panel: Electronic Stop delay timer: Yes Number of speeds: 3 + 1



TEKA

ENERGY LABEL

