




IZF 65320 BK MSP 60cm Flex Induction Hob with Direct Functions



MultiSlider

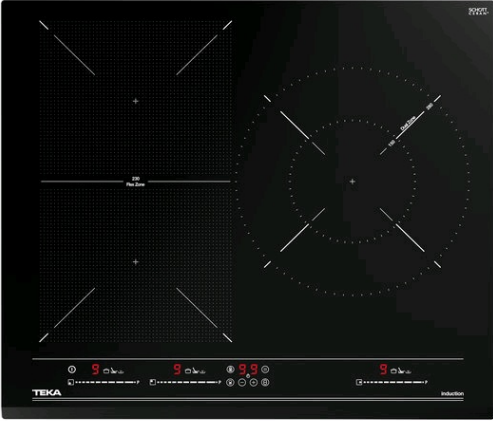

Autolock



Power



Power Plus



Easy installation



Flex

DESCRIPTION

60cm Flex Induction Hob with Direct Functions

LIFE STYLE

Maestro

COLOURS



REFERENCE

REF. 112510015
EAN. 8434778011630




TEKA

IZF 65320 BK MSP

FEATURES

FLEX Induction hob
Touch control MultiSlider
Cooking timer
4 cooking combinations:
1 induction Ø 150/280 mm
2 induction Ø 230 X 189 mm or 1 Flex zone Ø 230 X 378 mm
Special cooking functions: KeepWarm, Simmering & Melting
Power Plus function
Stop & Go function
Residual heat indicators
Fast-Click easy installation
Maximum nominal power : 8.000 W

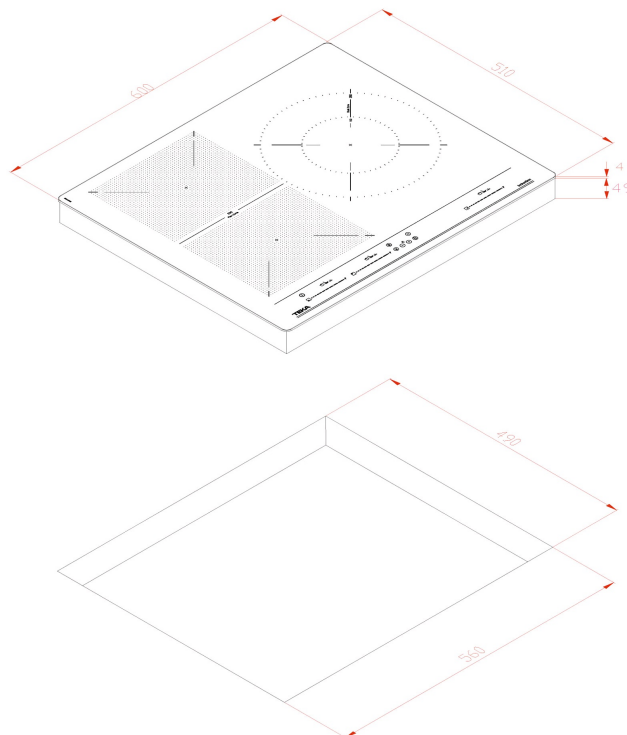

DIMENSIONS

Product height (mm): 53
Product width (mm): 600
Product depth (mm): 510
Product length (mm):
Net weight (Kg): 10,7

TECH SPECS

FITTING MEASURES

Built-in Width (mm): 560
Built-in Depth (mm): 490
Built-in Height (mm): 49

PARTICULAR CHARACTERISTICS

Number of electric power levels: 9
Simmering: Yes
Melting: Yes
Keeping warm: Yes
Power management function: Yes

ELECTRIC CONNECTION

Frequency (Hz): 50/60
Power rate (V): 220-240
Cable Connection Length (cm): 110
Maximum Nominal Power (W) (Electric hob): 7200

COOKING ZONES

Cooking Zones: 3
Left rear cooking zone - Diameter (mm): 230 X 188

Left rear cooking zone - Type: Flex Zone
Left rear cooking zone - Consumption (W): 1750-2200
Left front cooking zone - Diameter (mm): 230 X 188
Left front cooking zone - Type: Flex Zone
Left front cooking zone - Consumption (W): 1750-2200
Right center cooking zone - Diameter (mm): 150/280
Right center cooking zone - Type: Double Zone
Right center cooking zone - Consumption (W): 2500-3600

SECURITY SYSTEM

Residual heat indicator (Gas): Yes
Residual heat indicator (Electric hob): Yes
Automatic safety disconnection (Auto Lock) (Electric hob): Yes
Child lock: Yes

FINISH

Surface finishing: Front bevelled glass
Surface type: Ceramic Glass (4mm)
Easy installation system: Yes

ACCESSORIES

Junction Kit: Optional
Teppan Yaki: Optional

