A dark, artistic photograph of a kitchen hood. The hood is a sleek, dark grey or black structure with a prominent horizontal bar across the middle. The background is black, and the scene is illuminated by several bright, diagonal light rays that create a sense of depth and movement. Numerous small, glowing white and grey spheres, resembling bubbles or particles, are scattered throughout the space, particularly concentrated in the lower-left and upper-right areas. The overall mood is modern and sophisticated.

# Hoods

---

Welcome fresh air into your kitchen

TEKA

WORLDWIDE NOVELTY

# Infinity | G1 Edition

ELEGANCE AND PERFORMANCE AT ITS BEST

Our new Infinity | G1 Edition Vertical Hood is so good looking, that it will simply blend into your kitchen like a piece of decoration.

With powerful extraction and discreet, yet functional illumination, our Infinity | G1 Edition Hood will prove its worth and capability to turn performance and fresh air into an easily achievable goal, while maintain harmony in your kitchen look and layout.



### Unique finishing

Its black matt and velvet finishing, make it unique and special, ready to complement any kitchen, adding a touch of fine taste.



### Efficiency and performance

A+ energy efficiency class, with up to 800 m<sup>3</sup>/h max speed exhaust capacity.



### Convenience and flexibility

Up to four optional recirculation types of possible installation.



### Discover the complete edition

Get the most out of your Infinity | G1 Edition Vertical Hood, by matching them with the rest of the products of the edition.

SCAN AND  
DISCOVER

# Elegant design that **delivers consistent freshness**

Our outstanding hoods, now with a more stylish presence.

Our goal is to create the best environment for you at home. Our hoods will preserve freshness, silence and harmony in every corner of your kitchen, saving money at the same time.



TEKA

WORLDWIDE NOVELTY

# This hood reads your mind

WELCOME TO INTELLIGENT COOKING.

This Hood turns on automatically when you start cooking and regulates the power.



## Remote control

Turn on and control your Hood from your mobile phone.



## Always know what is going on

Access all the information on your Hood from wherever you want.



## Teka Home App

Discover all the different features on the Teka Home App.



# Meet the new Ceiling hood

DISCRETION AND HIGH  
PERFORMANCE AT ITS BEST.

Our ceiling hood is as discreet as it gets. Discover all the possibilities with its FreshAir Function, which will always keep your kitchen fresh and odour-free with automatic extraction cycles that you can program.

Moreover, control its light intensity and colour temperature to create an even nicer atmosphere, while keeping low noise and high efficiency. All of this and more in a hood equipped to be easily installed, so that you will have no worries



EXTERNAL EXTRACTION OR  
RECIRCULATION,  
**THE CHOICE IS YOURS**

Depending on your needs and home design, you will have the option to install your ceiling hood with recirculation system, which will aspire the odours and bring fresh air back into your kitchen, or with direct external extraction, which will take the odours out of your home.



# Discover our DLV hoods

Our DLV hoods show a unique vertical design to impress even the most demanding chefs. The hood is made of glass and anodized aluminium with high durability. The perfect combination also has a white display and an elegant LED lighting distributed all along the cooking area. Because your expectations deserve only the best, the elegance comes included.



SCAN AND  
DISCOVER

# The Perfect A4 hood

The perfect balance between efficiency, design and productivity. An incomparable hood thanks to a full 4 A energy label: A class in energy efficiency, fluidynamic, lightning and in grease filteringing.

The hood can extract up to 800 m<sup>3</sup> and remove 98% of the grease with its 12 layers filters. And from the hood to the dishwasher, because the stainless steel filters are designed to be washable, so forget about how to keep them clean.

- **Energy efficiency:** Energy efficiency index (EEI) It is calculated from annual consumption and from energy standard consumption.
- **Fluid Dynamic Efficiency:** Efficiency of the extraction system affected by different variables like the shape of the hoods.
- **Lighting efficiency class:** Indicates the efficiency with which the hood is able to illuminate the cooker hob.
- **Grease filtering efficiency class:** Indicates the hood efficiency to filter the grease from the cooking process.



# The freshness that **you deserve**

## RIM EXTRACTION: KEEP IT FRESH

A small slot is showed in the body of the hood and generates high pressure for a better and faster air extraction. Air cannot go further than the cooking area thanks to the speed and efficiency of the hood. Cook free of odours and fumes.

TEKA

A close-up, low-angle shot of a dark-colored kitchen hood. The hood features a prominent circular light on the left side, a control panel with a single button in the center, and a large rectangular mesh filter on the right. The hood is mounted on a wall, and the background is dark, emphasizing the metallic and plastic textures of the appliance. The brand name 'TEKA' is visible on the upper part of the hood's body.

# We help you choose **the right hood for your kitchen**

OUR WIDE VARIETY OF HOODS ALLOWS YOU  
TO CHOOSE **THE PERFECT MATCH FOR YOUR  
KITCHEN, DEPENDING ON YOUR NEEDS**

Just calculate your kitchen's volume.

For example, 12m<sup>2</sup> with 2,5m height.  
That's how we get the total volume: 12m<sup>2</sup> x 2,5m =  
30m<sup>3</sup>

Furniture must be taken into consideration.  
Approx. 40%. Final total volume: 18m<sup>3</sup>.  
Considering that the air is renovated 12 times per  
hour:

18m<sup>3</sup> x 12 renovations = 216m<sup>3</sup>/h

In a 12m<sup>2</sup> kitchen we need a hood with 216m<sup>3</sup>/h  
for an effective extraction.





NEW

MAESTRO DVI 88 INFINITY G1



- **Infinity | G1 Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 696
- Max speed exhaust capacity (m3/h): 558
- Min speed exhaust capacity (m3/h): 290
- Intensive speed sound level (dBA): 69.9
- Max speed sound level (dBA): 66.5
- Min speed sound level (dBA): 51.4
- 1 LED lamp
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included




NEW

MAESTRO DLV 99677 TOS BK



- **Teka Home: smart appliances with Wi-Fi connection**
- **Decorative vertical hood**
- Touch control
- HobToHood, automatic hood connection during cooking
- FreshAir function
- Rim extraction
- Brushless EcoPower Motor
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 993
- 1 LED lamp
- 2 aluminium filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included

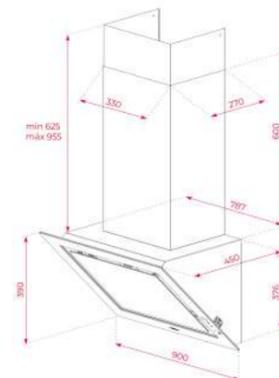


COLOR

Black

EXTERNAL DIMENSIONS

Height 800-1100 mm

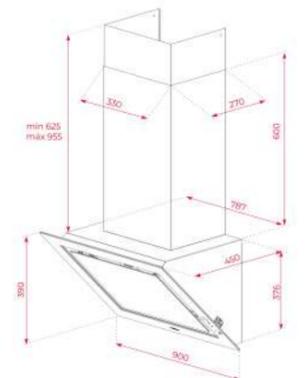


COLOR

Black

EXTERNAL DIMENSIONS

Height 1001-1331 mm

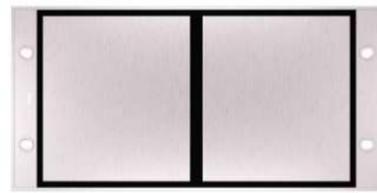


NEW

MAESTRO DHT 97670



- **Ceiling hood**
- Electronic control
- FreshAir function
- Rim extraction
- Remote control
- Brushless EcoPower Motor
- 4 speeds + 2 intensive
- Free Outlet exhaust capacity (m3/h): 800
- Max speed exhaust capacity (m3/h): 808
- Min speed exhaust capacity (m3/h): 315
- Intensive speed exhaust capacity (m3/h): 686
- Intensive speed sound level (dBA): 70
- Max speed sound level (dBA): 67
- Min speed sound level (dBA): 50
- 3 LED lamps
- Light intensity regulation
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Outlet reduction optional
- Optional Charcoal Filter: R1RES




COLOR  
 White

EXTERNAL DIMENSIONS  
 Height 900 mm

MAESTRO DHT 1285



- **Decorative island hood**
- Push buttons control
- Rim extraction
- Remote control
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Max speed exhaust capacity (m3/h): 631
- Min speed exhaust capacity (m3/h): 315
- Intensive speed exhaust capacity (m3/h): 807
- Intensive speed sound level (dBA): 66
- Max speed sound level (dBA): 60
- Min speed sound level (dBA): 47
- 4 LED lamps
- 4 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: ZUB 9015

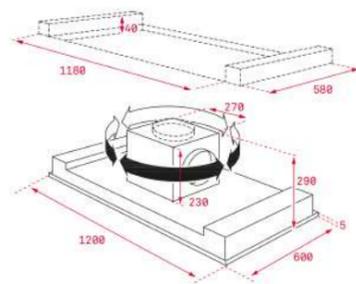


COLOR  
 Stainless Steel

EXTERNAL DIMENSIONS  
 Height 1200 mm

TOTAL DH2 ISLA 985



- **Decorative horizontal island hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 796
- Max speed exhaust capacity (m3/h): 605
- Min speed exhaust capacity (m3/h): 311
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 52
- 4 LED lamps
- 2 Stainless Steel filters
- Stop delay timer
- Filter saturation indicator
- Easy-Clean inside panel
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/T1
- Optional Charcoal Filter: D4C

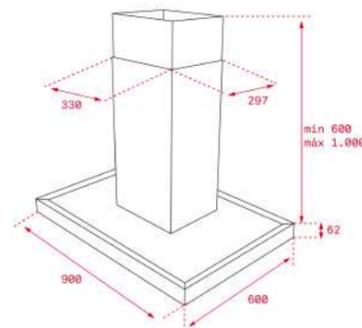


COLOR  
 Stainless Steel

EXTERNAL DIMENSIONS  
 Height 900 mm

TOTAL DG3 ISLA 985



- **Decorative glass wing island hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 796
- Max speed exhaust capacity (m3/h): 605
- Min speed exhaust capacity (m3/h): 311
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 52
- 4 LED lamps
- 2 Stainless Steel filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/T1
- Optional Charcoal Filter: D4C




COLOR  
 Stainless Steel

EXTERNAL DIMENSIONS  
 Height 900 mm

MAESTRO CC 485



- **Decorative tubular island hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 771
- Max speed exhaust capacity (m3/h): 525
- Min speed exhaust capacity (m3/h): 305
- Intensive speed sound level (dBA): 78
- Max speed sound level (dBA): 72
- Min speed sound level (dBA): 50
- 2 LEDS lamps
- 1 Stainless Steel filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/I1
- Optional Charcoal Filter: D4C




COLOR  
 Stainless Steel

EXTERNAL DIMENSIONS  
 Height 400 mm

TOTAL DH2 ISLA 1285



- **Decorative horizontal island hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 796
- Max speed exhaust capacity (m3/h): 605
- Min speed exhaust capacity (m3/h): 311
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 52
- 4 LED lamps
- 2 Stainless Steel filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Easy-Clean inside panel
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/T1
- Optional Charcoal Filter: D4C

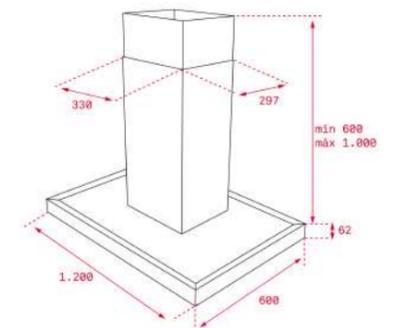

COLOR  
 Stainless Steel


EXTERNAL DIMENSIONS  
 Height 1200 mm



**TOTAL ESTRUCTURA DH2 ISLA 1285**



- **Decorative horizontal island hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 796
- Max speed exhaust capacity (m3/h): 605
- Min speed exhaust capacity (m3/h): 311
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 52
- 4 LED lamps
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Easy-Clean Inside Panel
- Operating pilot light
- Optional Charcoal Filter: D4C

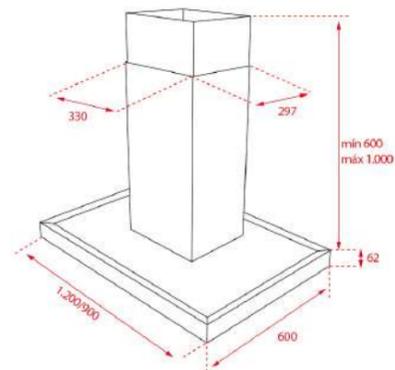

**COLOR**  
 Stainless Steel


**EXTERNAL DIMENSIONS**  
 Width mm



**MAESTRO CUERPO DPL ISLA 1185**



- **Decorative horizontal island hood**
- Electronic control with display
- Rim extraction
- EcoPower motor
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 782
- Max speed exhaust capacity (m3/h): 629
- Min speed exhaust capacity (m3/h): 331
- Intensive speed sound level (dBA): 69
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 54
- 4 LED lamps
- 3 aluminium filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/T1
- Optional Charcoal Filter: D4C



**COLOR**  
 Stainless Steel/Black Glass


**EXTERNAL DIMENSIONS**  
 Height 1100 mm



**MAESTRO DPL 1185 ISLA**



- **Decorative horizontal island hood**
- Touch control
- Rim extraction
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 782
- Max speed exhaust capacity (m3/h): 629
- Min speed exhaust capacity (m3/h): 331
- Intensive speed sound level (dBA): 69
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 54
- 4 LED lamps
- 3 aluminium filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/T1
- Optional Charcoal Filter: D4C



**COLOR**  
 Stainless Steel/Black Glass


**EXTERNAL DIMENSIONS**  
 Height 1100 mm



**MAESTRO DLV 99670 TOS BK**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 920
- Max speed exhaust capacity (m3/h): 625
- Min speed exhaust capacity (m3/h): 210
- Intensive speed sound level (dBA): 72
- Max speed sound level (dBA): 65
- Min speed sound level (dBA): 39
- 1 LED lamp
- 2 aluminium filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional regenerative recirculation kit without tube cover installation: RFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

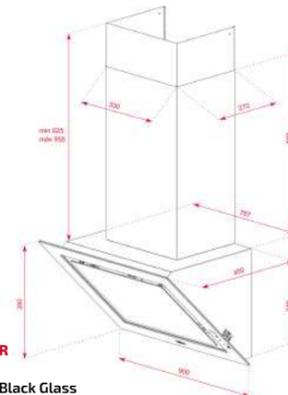

**COLOR**  
 Black Glass


**EXTERNAL DIMENSIONS**  
 Height 900 mm



**MAESTRO DLV 98660 TOS WH**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 696
- Max speed exhaust capacity (m3/h): 558
- Min speed exhaust capacity (m3/h): 290
- Intensive speed sound level (dBA): 69.9
- Max speed sound level (dBA): 66.5
- Min speed sound level (dBA): 51.4
- 1 LED lamp
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

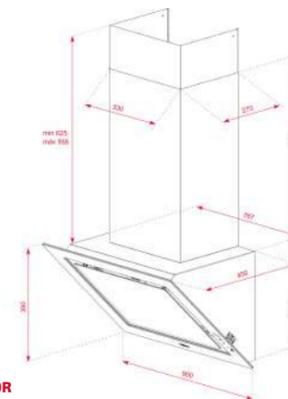

**COLOR**  
 White


**EXTERNAL DIMENSIONS**  
 Height 900 mm



**MAESTRO DLV 98660 TOS ST**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 696
- Max speed exhaust capacity (m3/h): 558
- Min speed exhaust capacity (m3/h): 290
- Intensive speed sound level (dBA): 69.9
- Max speed sound level (dBA): 66.5
- Min speed sound level (dBA): 51.4
- 1 LED lamp
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

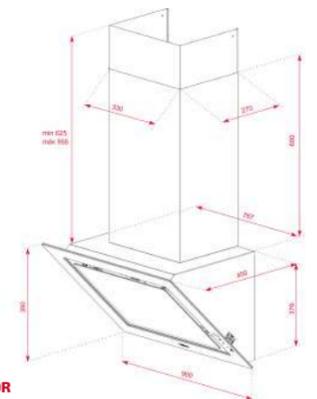

**COLOR**  
 Stone Grey Glass


**EXTERNAL DIMENSIONS**  
 Height 900 mm



**MAESTRO DLV 98660 TOS**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 696
- Max speed exhaust capacity (m3/h): 558
- Min speed exhaust capacity (m3/h): 290
- Intensive speed sound level (dBA): 69.9
- Max speed sound level (dBA): 66.5
- Min speed sound level (dBA): 51.4
- 1 LED lamp
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

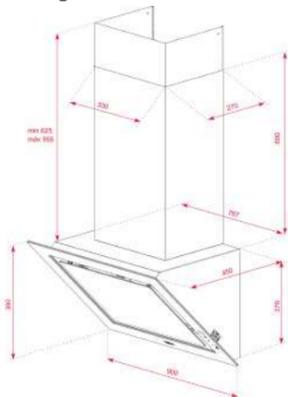


**COLOR**  
 Steam Grey Glass

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**MAESTRO DLV 98660 TOS LB**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 696
- Max speed exhaust capacity (m3/h): 558
- Min speed exhaust capacity (m3/h): 290
- Intensive speed sound level (dBA): 69.9
- Max speed sound level (dBA): 66.5
- Min speed sound level (dBA): 51.4
- 1 LED lamp
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

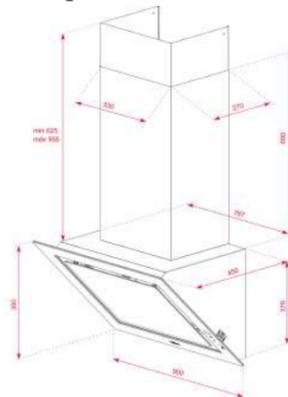


**COLOR**  
 London brick brown glass

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**MAESTRO DLV 98660 TOS BK**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 696
- Max speed exhaust capacity (m3/h): 558
- Min speed exhaust capacity (m3/h): 290
- Intensive speed sound level (dBA): 69.9
- Max speed sound level (dBA): 66.5
- Min speed sound level (dBA): 51.4
- 1 LED lamp
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

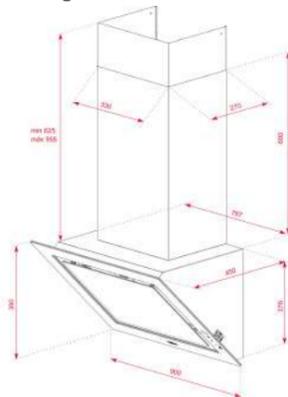


**COLOR**  
 Black Glass

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**MAESTRO DLV 69670 TOS BK**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 880
- Max speed exhaust capacity (m3/h): 600
- Min speed exhaust capacity (m3/h): 200
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 57
- Min speed sound level (dBA): 41
- 1 LED lamp
- 1 Aluminium filter
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

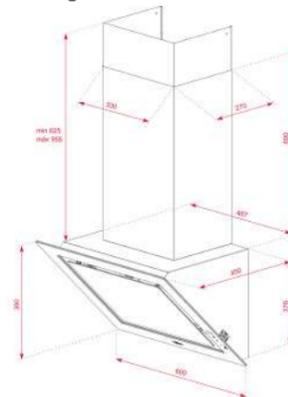


**COLOR**  
 Black Glass

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**MAESTRO DLV 68660 TOS**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (dBA): 725
- Max speed exhaust capacity (m3/h): 410
- Min speed exhaust capacity (m3/h): 232
- Intensive speed sound level (dBA): 70.9
- Max speed sound level (dBA): 64.6
- Min speed sound level (dBA): 49.4
- 1 LED lamp
- 1 Aluminium filter
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

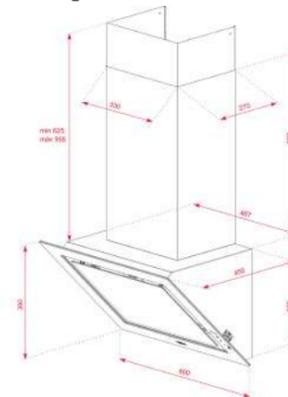


**COLOR**  
 White

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**MAESTRO DLV 68660 TOS**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (dBA): 725
- Max speed exhaust capacity (m3/h): 410
- Min speed exhaust capacity (m3/h): 232
- Intensive speed sound level (dBA): 70.9
- Max speed sound level (dBA): 64.6
- Min speed sound level (dBA): 49.4
- 1 LED lamp
- 1 Aluminium filter
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

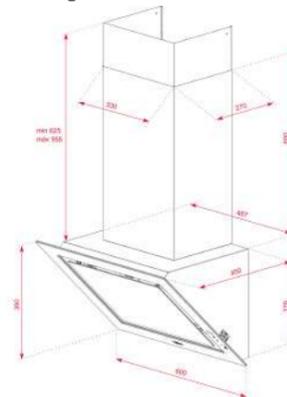

**COLOR**  
 Stone Grey Glass

**EXTERNAL DIMENSIONS**  
 Height 600 mm





MAESTRO DLV 68660 TOS

MAESTRO DLV 68660 TOS

MAESTRO DLV 68660 TOS

MAESTRO DVT 98660 TBS WH

MAESTRO DVT 98660 TBS BK

MAESTRO DVT 78660 TBS WH



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (dBA): 725
- Max speed exhaust capacity (m3/h): 410
- Min speed exhaust capacity (m3/h): 232
- Intensive speed sound level (dBA): 70,9
- Max speed sound level (dBA): 64,6
- Min speed sound level (dBA): 49,4
- 1 LED lamp
- 1 Aluminium filter
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK







- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (dBA): 725
- Max speed exhaust capacity (m3/h): 410
- Min speed exhaust capacity (m3/h): 232
- Intensive speed sound level (dBA): 70,9
- Max speed sound level (dBA): 64,6
- Min speed sound level (dBA): 49,4
- 1 LED lamp
- 1 Aluminium filter
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (dBA): 725
- Max speed exhaust capacity (m3/h): 410
- Min speed exhaust capacity (m3/h): 232
- Intensive speed sound level (dBA): 70,9
- Max speed sound level (dBA): 64,6
- Min speed sound level (dBA): 49,4
- 1 LED lamp
- 1 Aluminium filter
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L3C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L3C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 698
- Max speed exhaust capacity (m3/h): 584
- Min speed exhaust capacity (m3/h): 307
- Intensive speed sound level (dBA): 74
- Max speed sound level (dBA): 68
- Min speed sound level (dBA): 52
- 2 LED lamps
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L2C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L2C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional regenerative recirculation kit without tube cover installation: FH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 698
- Max speed exhaust capacity (m3/h): 584
- Min speed exhaust capacity (m3/h): 307
- Intensive speed sound level (dBA): 74
- Max speed sound level (dBA): 68
- Min speed sound level (dBA): 52
- 2 LED lamps
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L2C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L2C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional regenerative recirculation kit without tube cover installation: FH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 698
- Max speed exhaust capacity (m3/h): 584
- Min speed exhaust capacity (m3/h): 307
- Intensive speed sound level (dBA): 74
- Max speed sound level (dBA): 68
- Min speed sound level (dBA): 52
- 2 LED lamps
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L2C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L2C
- Optional recirculation kit without tube cover installation: CFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK

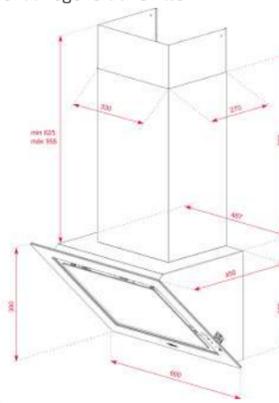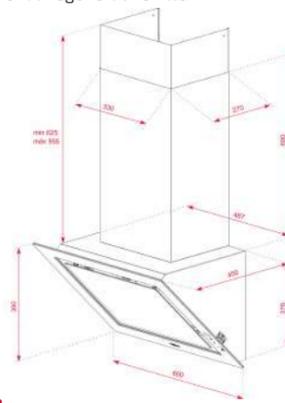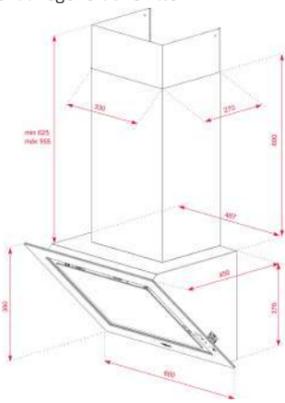

**COLOR**  
Steam Grey

**COLOR**  
London brick brown glass

**COLOR**  
Black Glass

**COLOR**  
White

**COLOR**  
Black

**COLOR**  
White Glass

**EXTERNAL DIMENSIONS**  
Height 600 mm

**EXTERNAL DIMENSIONS**  
Height 600 mm

**EXTERNAL DIMENSIONS**  
Height 600 mm

**EXTERNAL DIMENSIONS**  
Height 900 mm

**EXTERNAL DIMENSIONS**  
Height 900 mm


**EXTERNAL DIMENSIONS**  
Height 700 mm



**MAESTRO DVT 78660 TBS BK**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 698
- Max speed exhaust capacity (m3/h): 584
- Min speed exhaust capacity (m3/h): 307
- Intensive speed sound level (dBA): 74
- Max speed sound level (dBA): 68
- Min speed sound level (dBA): 52
- 2 LED lamps
- 2 Aluminium Filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L2C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L2C
- Optional recirculation kit without tube cover installation: RFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK




**COLOR**  
 Black

**EXTERNAL DIMENSIONS**  
 Height 700 mm

**MAESTRO DVT 68660 TBS**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 698
- Max speed exhaust capacity (m3/h): 584
- Min speed exhaust capacity (m3/h): 307
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 65
- Min speed sound level (dBA): 64
- 2 LED lamps
- 2 Aluminium Filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L2C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L2C
- Optional recirculation kit without tube cover installation: RFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK




**COLOR**  
 White

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**MAESTRO DVT 68660 TBS**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control with display
- FreshAir function
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 698
- Max speed exhaust capacity (m3/h): 584
- Min speed exhaust capacity (m3/h): 307
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 65
- Min speed sound level (dBA): 64
- 2 LED lamps
- 2 Aluminium Filters
- Stop delay timer
- Filter saturation indicator
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: CFH 15200 L2C
- Optional regenerative recirculation kit with tube cover installation: RFH 15200 L2C
- Optional recirculation kit without tube cover installation: RFH 15200 O2C
- Optional Charcoal Filter: C1RTK
- Optional Regenerative filter: R1RTK




**COLOR**  
 Black

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**MAESTRO DVF 97670 TBS WH**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control
- FreshAir function
- Brushless EcoPower Motor
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 740
- Max speed exhaust capacity (m3/h): 400
- Min speed exhaust capacity (m3/h): 270
- Intensive speed sound level (dBA): 59
- Max speed sound level (dBA): 48
- Min speed sound level (dBA): 42
- 2 LED lamps
- Light intensity regulation
- 2 Aluminium Filters
- Anti-return valve included
- Stop delay timer
- Filter saturation indicator
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D11CTP
- Optional regenerative recirculation kit with tube cover installation: Set D12CTP
- Optional Charcoal Filter: D11C
- Optional Regenerative filter: D12C

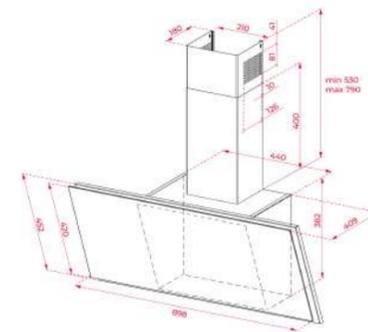


**COLOR**  
 White Glass

**EXTERNAL DIMENSIONS**  
 Height 898 mm

**MAESTRO DVF 97670 TBS BK**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control
- FreshAir function
- Brushless EcoPower Motor
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 740
- Max speed exhaust capacity (m3/h): 400
- Min speed exhaust capacity (m3/h): 270
- Intensive speed sound level (dBA): 59
- Max speed sound level (dBA): 48
- Min speed sound level (dBA): 42
- 2 LED lamps
- 2 Aluminium Filters
- Stop delay timer
- Filter saturation indicator
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D11CTP
- Optional regenerative recirculation kit with tube cover installation: Set D12CTP
- Optional Charcoal Filter: D11C
- Optional Regenerative filter: D12C

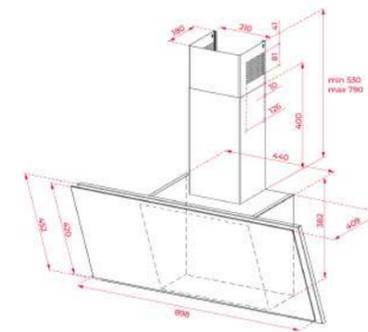


**COLOR**  
 Black Glass

**EXTERNAL DIMENSIONS**  
 Height 898 mm

**EASY DVN 97050 TTC WH**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control
- Rim extraction
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 704
- Intensive speed exhaust capacity (m3/h): 640
- Max speed exhaust capacity (m3/h): 485
- Min speed exhaust capacity (m3/h): 260
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 65
- Min speed sound level (dBA): 64
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D9C



**COLOR**  
 White


**EXTERNAL DIMENSIONS**  
 Height 898 mm



EASY DVN 97050 TTC BK



- Urban Colors Edition
- Decorative vertical hood
- Touch control
- Rim extraction
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 704
- Intensive speed exhaust capacity (m3/h): 640
- Max speed exhaust capacity (m3/h): 485
- Min speed exhaust capacity (m3/h): 260
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 64
- Min speed sound level (dBA): 61
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D9C



## COLOR

Black Glass

## EXTERNAL DIMENSIONS


Height 898 mm



EASY DVN 77050 TTC WH



- Urban Colors Edition
- Decorative vertical hood
- Touch control
- Rim extraction
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h):704
- Intensive speed exhaust capacity (m3/h): 640
- Max speed exhaust capacity (m3/h): 485
- Min speed exhaust capacity (m3/h): 260
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 64
- Min speed sound level (dBA): 54
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D9C



## COLOR

White

## EXTERNAL DIMENSIONS


Height 698 mm



EASY DVN 77050 TTC BK



- Urban Colors Edition
- Decorative vertical hood
- Touch control
- Rim extraction
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h):704
- Intensive speed exhaust capacity (m3/h): 640
- Max speed exhaust capacity (m3/h): 485
- Min speed exhaust capacity (m3/h): 260
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 64
- Min speed sound level (dBA): 54
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D11C



## COLOR

Black Glass

## EXTERNAL DIMENSIONS


Height 698 mm



EASY DVN 67050 TTC WH



- Urban Colors Edition
- Decorative vertical hood
- Touch control
- Rim extraction
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h):704
- Intensive speed exhaust capacity (m3/h): 640
- Max speed exhaust capacity (m3/h): 485
- Min speed exhaust capacity (m3/h): 260
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 64
- Min speed sound level (dBA): 54
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D9C



## COLOR

White

## EXTERNAL DIMENSIONS


Height 598 mm



EASY DVN 67050 TTC BK



- Urban Colors Edition
- Decorative vertical hood
- Touch control
- Rim extraction
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h):704
- Intensive speed exhaust capacity (m3/h): 640
- Max speed exhaust capacity (m3/h): 485
- Min speed exhaust capacity (m3/h): 260
- Intensive speed sound level (dBA):71
- Max speed sound level (dBA): 64
- Min speed sound level (dBA): 54
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D9C



## COLOR

Black Glass

## EXTERNAL DIMENSIONS

Height 598 mm




NEW

EASY DVN 94030 TTC



- Urban Colors Edition
- Decorative vertical hood
- Touch control
- Rim extraction
- 2 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 460
- Intensive speed exhaust capacity (m3/h): 425
- Max speed exhaust capacity (m3/h): 410
- Min speed exhaust capacity (m3/h): 380
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 67
- Min speed sound level (dBA): 65
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D9C



## COLOR

White

## EXTERNAL DIMENSIONS

Height 898 mm






NEW

## EASY DVN 94030 TTC



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control
- Rim extraction
- 2 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 460
- Intensive speed exhaust capacity (m3/h): 425
- Max speed exhaust capacity (m3/h): 410
- Min speed exhaust capacity (m3/h): 380
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 67
- Min speed sound level (dBA): 65
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D9C



## COLOR

Black Glass

## EXTERNAL DIMENSIONS

Height 898 mm




NEW

## EASY DVN 74030 TTC



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control
- Rim extraction
- 2 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h):460
- Intensive speed exhaust capacity (m3/h): 425
- Max speed exhaust capacity (m3/h): 410
- Min speed exhaust capacity (m3/h): 380
- Intensive speed sound level (dBA): 72
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 65
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D9C



## COLOR

White

## EXTERNAL DIMENSIONS

Height 698 mm




NEW

## EASY DVN 74030 TTC



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control
- Rim extraction
- 2 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h):460
- Intensive speed exhaust capacity (m3/h): 425
- Max speed exhaust capacity (m3/h): 410
- Min speed exhaust capacity (m3/h): 380
- Intensive speed sound level (dBA): 72
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 65
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D9C



## COLOR

Black Glass

## EXTERNAL DIMENSIONS

Height 698 mm




NEW

## EASY DVN 64030 TTC



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control
- Rim extraction
- 2 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h):460
- Intensive speed exhaust capacity (m3/h): 425
- Max speed exhaust capacity (m3/h): 410
- Min speed exhaust capacity (m3/h): 380
- Intensive speed sound level (dBA):72
- Max speed sound level (dBA): 66
- Min speed sound level (dBA):65
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D9C
- Optional Regenerative filter: D13C



## COLOR

White

## EXTERNAL DIMENSIONS

Height 598 mm




NEW

## EASY DVN 64030 TTC



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control
- Rim extraction
- 2 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h):460
- Intensive speed exhaust capacity (m3/h): 425
- Max speed exhaust capacity (m3/h): 410
- Min speed exhaust capacity (m3/h): 380
- Intensive speed sound level (dBA): 72
- Max speed sound level (dBA): 68
- Min speed sound level (dBA): 65
- 2 LED lamps
- 1 Aluminium Filter
- Stop delay timer
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D13CTP
- Optional Charcoal Filter: D9C



## COLOR

Black Glass

## EXTERNAL DIMENSIONS


Height 598 mm



## MAESTRO DU 985



- **Decorative vertical hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 807
- Max speed exhaust capacity (m3/h): 597
- Min speed exhaust capacity (m3/h): 303
- Intensive speed sound level (dBA): 72
- Max speed sound level (dBA): 68
- Min speed sound level (dBA): 56
- 4 LED lamps
- 1 Stainless Steel filter
- Stop delay timer
- Filter saturation indicator
- Easy-Clean inside panel
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: 1/M
- Optional Charcoal Filter: D4C

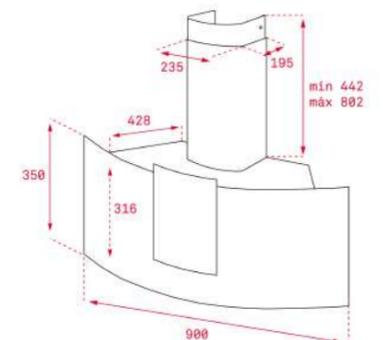

## COLOR

Black

## EXTERNAL DIMENSIONS


Height 900 mm



**MAESTRO DVF 67670 TBS**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control
- FreshAir function
- Brushless EcoPower Motor
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 740
- Max speed exhaust capacity (m3/h): 400
- Min speed exhaust capacity (m3/h): 270
- Intensive speed sound level (dBA): 59
- Max speed sound level (dBA): 48
- Min speed sound level (dBA): 42
- 2 LED lamps
- 2 Aluminium Filters
- Stop delay timer
- Filter saturation indicator
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D11CTP
- Optional regenerative recirculation kit with tube cover installation: Set D12CTP
- Optional Charcoal Filter: D11C
- Optional Regenerative filter: D12C

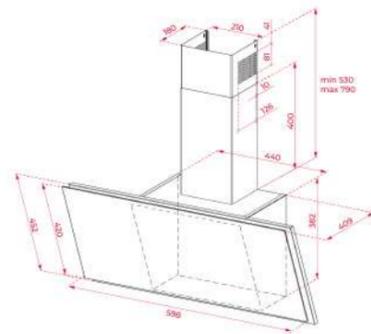


**COLOR**  
 White Glass

**EXTERNAL DIMENSIONS**  
 Height 598 mm

**MAESTRO DVF 67670 TBS**



- **Urban Colors Edition**
- **Decorative vertical hood**
- Touch control
- FreshAir function
- Brushless EcoPower Motor
- 3 speeds + 1 intensive
- Intensive speed exhaust capacity (m3/h): 740
- Max speed exhaust capacity (m3/h): 400
- Min speed exhaust capacity (m3/h): 270
- Intensive speed sound level (dBA): 59
- Max speed sound level (dBA): 48
- Min speed sound level (dBA): 42
- 2 LED lamps
- 2 Aluminium Filters
- Stop delay timer
- Filter saturation indicator
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET D11CTP
- Optional regenerative recirculation kit with tube cover installation: Set D12CTP
- Optional Charcoal Filter: D11C
- Optional Regenerative filter: D12C

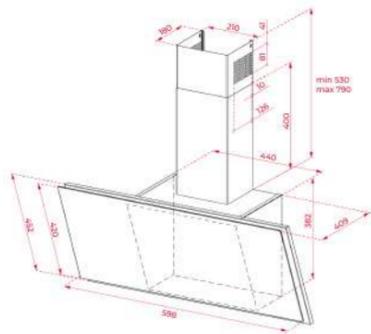


**COLOR**  
 Black Glass

**EXTERNAL DIMENSIONS**  
 Height 598 mm

**MAESTRO DPL 986 T**



- **Decorative horizontal hood**
- Electronic control with display
- Rim extraction
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 782
- Max speed exhaust capacity (m3/h): 629
- Min speed exhaust capacity (m3/h): 331
- Intensive speed sound level (dBA): 65
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 45
- 1 LED lamp
- 3 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C




**COLOR**  
 Stainless Steel/Black Glass

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**MAESTRO DPL 786 T**



- **Decorative horizontal hood**
- Electronic control with display
- Rim extraction
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 782
- Max speed exhaust capacity (m3/h): 629
- Min speed exhaust capacity (m3/h): 331
- Intensive speed sound level (dBA): 65
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 45
- 1 LED lamp
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C




**COLOR**  
 Black

**EXTERNAL DIMENSIONS**  
 Height 700 mm

**MAESTRO DPS 986**



- **Decorative horizontal hood**
- Electronic control with display
- Rim extraction
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 782
- Max speed exhaust capacity (m3/h): 629
- Min speed exhaust capacity (m3/h): 331
- Intensive speed sound level (dBA): 65
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 45
- 1 LED lamp
- 3 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C




**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**MAESTRO DPS 786**



- **Decorative horizontal hood**
- Electronic control with display
- Rim extraction
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 782
- Max speed exhaust capacity (m3/h): 629
- Min speed exhaust capacity (m3/h): 331
- Intensive speed sound level (dBA): 65
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 45
- 1 LED lamp
- 2 Aluminium filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C

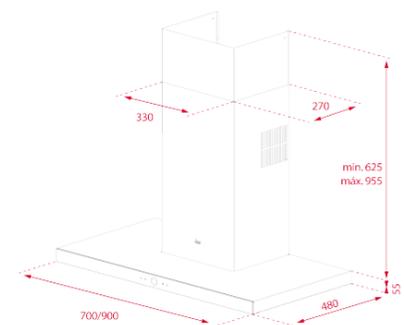

**COLOR**  
 Stainless Steel


**EXTERNAL DIMENSIONS**  
 Height 900 mm



MAESTRO DLH 1185 T



- Decorative horizontal hood
- Touch control
- Brushless EcoPower Motor
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 795
- Intensive speed exhaust capacity (m3/h):740
- Max speed exhaust capacity (m3/h): 586
- Min speed exhaust capacity (m3/h): 306
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 54
- 1 LED lamp
- 3 Aluminium filters with 12 layers
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C

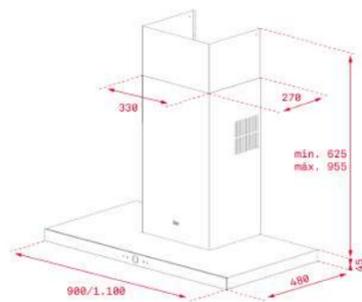

**COLOR**  
 Stainless Steel/Black Glass


**EXTERNAL DIMENSIONS**  
 Height 1100 mm



MAESTRO DLH 985 T



- Decorative horizontal hood
- Electronic control with display
- EcoPower motor
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 795
- Intensive speed exhaust capacity (m3/h):740
- Max speed exhaust capacity (m3/h): 586
- Min speed exhaust capacity (m3/h): 306
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 54
- 1 LED lamp
- 3 Stainless Steel filters with 12 layers
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Exchangeable front panel
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C

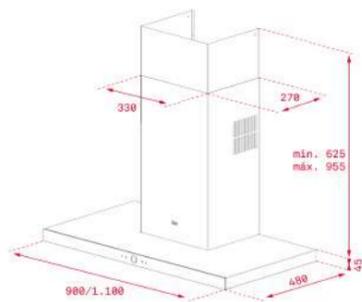

**COLOR**  
 Stainless Steel/Black Glass


**EXTERNAL DIMENSIONS**  
 Height 900 mm



MAESTRO DLH 1186 T



- Decorative horizontal hood
- Touch control
- EcoPower motor
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h):701
- Max speed exhaust capacity (m3/h): 584
- Min speed exhaust capacity (m3/h): 303
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 57
- Min speed sound level (dBA): 53
- 1 LED lamp
- 4 Stainless Steel filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET C1RTK
- Optional Charcoal Filter: D1C



**COLOR**  
 Stainless Steel/Black Glass


**EXTERNAL DIMENSIONS**  
 Height 1100 mm



MAESTRO DLH 986 T



- Decorative horizontal hood
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h):701
- Max speed exhaust capacity (m3/h): 584
- Min speed exhaust capacity (m3/h): 303
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 57
- Min speed sound level (dBA): 53
- 1 LED lamp
- 3 Stainless Steel filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET C1RTK
- Optional Charcoal Filter: D1C



**COLOR**  
 Stainless Steel/Black Glass


**EXTERNAL DIMENSIONS**  
 Height 900 mm



MAESTRO DLH 786 T



- Decorative horizontal hood
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h):701
- Max speed exhaust capacity (m3/h): 584
- Min speed exhaust capacity (m3/h): 303
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 57
- Min speed sound level (dBA): 53
- 1 LED lamp
- 2 Stainless Steel filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET C1RTK
- Optional Charcoal Filter: D1C



**COLOR**  
 Stainless Steel/Black Glass


**EXTERNAL DIMENSIONS**  
 Height 700 mm



MAESTRO DLH 686 T



- Decorative horizontal hood
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h):701
- Max speed exhaust capacity (m3/h): 584
- Min speed exhaust capacity (m3/h): 303
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 57
- Min speed sound level (dBA): 53
- 1 LED lamp
- 2 Stainless Steel filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET C1RTK
- Optional Charcoal Filter: D1C



**COLOR**  
 Stainless Steel/Black Glass

**EXTERNAL DIMENSIONS**  
 Height 600 mm






**TOTAL DSH 985**



- **Decorative horizontal hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 740
- Max speed exhaust capacity (m3/h): 586
- Min speed exhaust capacity (m3/h): 306
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 56
- Min speed sound level (dBA): 42
- 1 LED lamp
- 3 Stainless Steel filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C




**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**TOTAL DSH 785**



- **Decorative horizontal hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 740
- Max speed exhaust capacity (m3/h): 586
- Min speed exhaust capacity (m3/h): 306
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 42
- 1 LED lamp
- 2 Stainless Steel filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C




**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 700 mm

**TOTAL DSH 685**



- **Decorative horizontal hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 740
- Max speed exhaust capacity (m3/h): 586
- Min speed exhaust capacity (m3/h): 306
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 56
- Min speed sound level (dBA): 42
- 1 LED lamp
- 2 Stainless Steel filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C




**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**EASY DSJ 980**



- **Decorative horizontal hood**
- Electronic control with display
- 4 speeds
- Free Outlet exhaust capacity (m3/h): 638
- Max speed exhaust capacity (m3/h): 614
- Min speed exhaust capacity (m3/h): 268
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 45
- 1 LED lamp
- 3 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: D1CTP
- Optional Charcoal Filter: D1C




**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**EASY DSJ 680**



- **Decorative horizontal hood**
- Push buttons control
- 4 speeds
- Free Outlet exhaust capacity (m3/h): 638
- Max speed exhaust capacity (m3/h): 614
- Min speed exhaust capacity (m3/h): 268
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 60
- 2 LED lamp
- 2 Stainless Steel filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: D1CTP
- Optional Charcoal Filter: D1C




**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**TOTAL DG 985**



- **Decorative glass wing hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 895
- Intensive speed exhaust capacity (m3/h): 807
- Max speed exhaust capacity (m3/h): 631
- Min speed exhaust capacity (m3/h): 315
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 42
- 2 LED lamps
- 1 Stainless Steel filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C



**COLOR**  
 Stainless Steel Glass Wing

**EXTERNAL DIMENSIONS**  
 Height 900 mm



**TOTAL DG 785**



- **Decorative glass wing hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 895
- Intensive speed exhaust capacity (m3/h): 807
- Max speed exhaust capacity (m3/h): 631
- Min speed exhaust capacity (m3/h): 315
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 42
- 2 LED lamps
- 1 Stainless Steel filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C

**TOTAL DG 685**



- **Decorative glass wing hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 895
- Intensive speed exhaust capacity (m3/h): 807
- Max speed exhaust capacity (m3/h): 631
- Min speed exhaust capacity (m3/h): 315
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 42
- 2 LED lamps
- 1 Stainless Steel filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C

**TOTAL NC 985**



- **Decorative glass wing hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 895
- Intensive speed exhaust capacity (m3/h): 807
- Max speed exhaust capacity (m3/h): 631
- Min speed exhaust capacity (m3/h): 315
- Intensive speed sound level (dBA): 72
- Max speed sound level (dBA): 68
- Min speed sound level (dBA): 56
- 2 LED Lamps
- 1 Stainless Steel filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C

**TOTAL NC 785**



- **Decorative glass wing hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 895
- Intensive speed exhaust capacity (m3/h): 807
- Max speed exhaust capacity (m3/h): 631
- Min speed exhaust capacity (m3/h): 315
- Intensive speed sound level (dBA): 72
- Max speed sound level (dBA): 68
- Min speed sound level (dBA): 56
- 2 LED Lamps
- 1 Stainless Steel filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C

**TOTAL NC 685**









- **Decorative glass wing hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 895
- Intensive speed exhaust capacity (m3/h): 807
- Max speed exhaust capacity (m3/h): 631
- Min speed exhaust capacity (m3/h): 315
- Intensive speed sound level (dBA): 72
- Max speed sound level (dBA): 68
- Min speed sound level (dBA): 56
- 2 LED Lamps
- 1 Stainless Steel filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C

**MAESTRO DQ2 985**



- **Decorative glass wing hood**
- Electronic control with display
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 920
- Intensive speed exhaust capacity (m3/h): 807
- Max speed exhaust capacity (m3/h): 631
- Min speed exhaust capacity (m3/h): 315
- Intensive speed sound level (dBA): 60
- Max speed sound level (dBA): 55
- Min speed sound level (dBA): 42
- 3 LED lamps
- 2 Stainless Steel filters
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Easy-Clean inside panel
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/L
- Optional Charcoal Filter: D4C

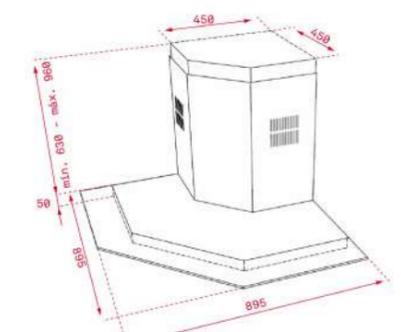

**COLOR**  
 Stainless Steel Glass Wing

**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 700 mm

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**EXTERNAL DIMENSIONS**  
 Height 700 mm

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**EXTERNAL DIMENSIONS**  
 Height 895 mm



**TOTAL DOS 90.1**



- **Country Style Edition**
- **Decorative pyramidal hood**
- Electronic control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 650
- Max speed exhaust capacity (m3/h): 603
- Min speed exhaust capacity (m3/h): 256
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 51
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 4/D
- Optional Charcoal Filter: D5C

**TOTAL DOS 90.1 VANILLA-BRASS**



- **Country Style Edition**
- **Decorative pyramidal hood**
- Electronic control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 650
- Max speed exhaust capacity (m3/h): 603
- Min speed exhaust capacity (m3/h): 256
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 51
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 4/D
- Optional Charcoal Filter: D5C

**TOTAL DOS 90.1 VANILLA-SILVER**



- **Country Style Edition**
- **Decorative pyramidal hood**
- Electronic control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 650
- Max speed exhaust capacity (m3/h): 603
- Min speed exhaust capacity (m3/h): 256
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 51
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 4/D
- Optional Charcoal Filter: D5C

**TOTAL DOS 90.1 ANTHRACITE-SILVER**



- **Country Style Edition**
- **Decorative pyramidal hood**
- Electronic control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 650
- Max speed exhaust capacity (m3/h): 603
- Min speed exhaust capacity (m3/h): 256
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 51
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 4/D
- Optional Charcoal Filter: D5C

**TOTAL DOS 60.1**









- **Urban Colors Edition**
- **Decorative pyramidal hood**
- Electronic control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 650
- Max speed exhaust capacity (m3/h): 603
- Min speed exhaust capacity (m3/h): 256
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 51
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 4/D
- Optional Charcoal Filter: D5C

**TOTAL DOS 60.1 VANILLA-BRASS**



- **Country Style Edition**
- **Decorative pyramidal hood**
- Electronic control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 650
- Max speed exhaust capacity (m3/h): 603
- Min speed exhaust capacity (m3/h): 256
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 51
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 4/D
- Optional Charcoal Filter: D5C

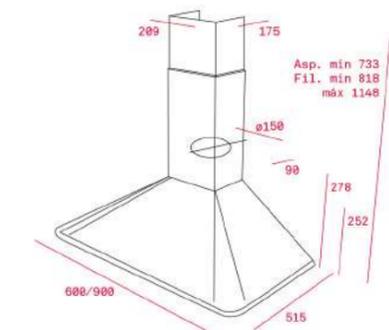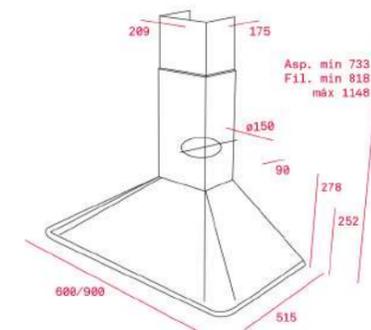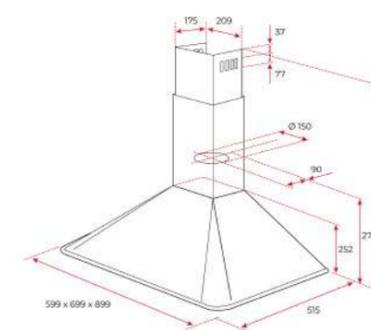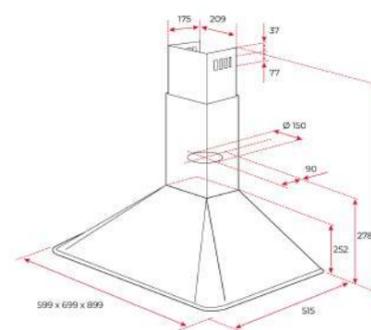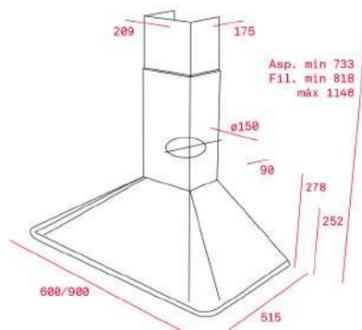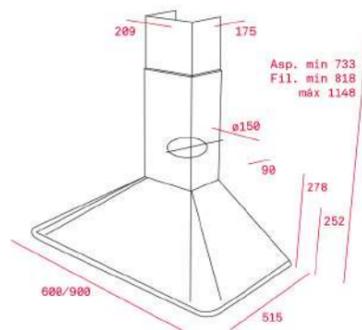

**COLOR**  
 Anthracite Brass

**COLOR**  
 Vanilla Brass

**COLOR**  
 Vanilla Silver

**COLOR**  
 Anthracite Silver

**COLOR**  
 Anthracite Brass

**COLOR**  
 Vanilla Brass

**EXTERNAL DIMENSIONS**  
 Width 600/900mm






## TOTAL DOS 60.1 VANILLA-SILVER



- Country Style Edition
- Decorative pyramidal hood
- Electronic control
- 3 speeds
- Free Outlet exhaust capacity (m<sup>3</sup>/h): 650
- Max speed exhaust capacity (m<sup>3</sup>/h): 603
- Min speed exhaust capacity (m<sup>3</sup>/h): 256
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 51
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 4/D
- Optional Charcoal Filter: D5C

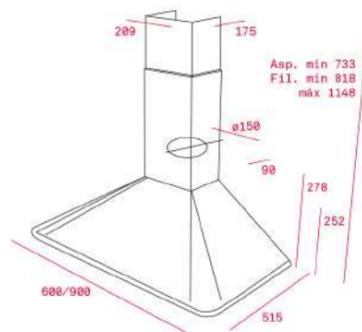

## COLOR

Vanilla Silver

## EXTERNAL DIMENSIONS


Width 600/900mm



## TOTAL DOS 60.1 ANTHRACITE-SILVER



- Country Style Edition
- Decorative pyramidal hood
- Electronic control
- 3 speeds
- Free Outlet exhaust capacity (m<sup>3</sup>/h): 650
- Max speed exhaust capacity (m<sup>3</sup>/h): 603
- Min speed exhaust capacity (m<sup>3</sup>/h): 256
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 51
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 4/D
- Optional Charcoal Filter: D5C

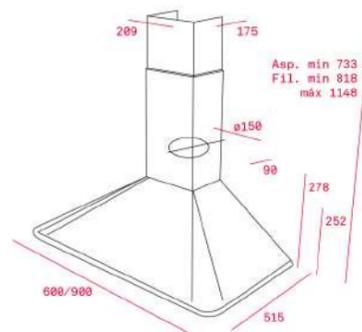

## COLOR

Anthracite Silver

## EXTERNAL DIMENSIONS


Width 600/900mm



## TOTAL DSS 985



- Decorative pyramidal hood
- Illuminated push buttons control
- EcoPower motor
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m<sup>3</sup>/h): 792
- Intensive speed exhaust capacity (m<sup>3</sup>/h): 760
- Max speed exhaust capacity (m<sup>3</sup>/h): 597
- Min speed exhaust capacity (m<sup>3</sup>/h): 303
- Intensive speed sound level (dBA): 73
- Max speed sound level (dBA): 68
- Min speed sound level (dBA): 54
- 1 LED lamp
- 3 Stainless Steel filters
- Stop delay timer
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C



## COLOR

Stainless Steel

## EXTERNAL DIMENSIONS


Height 900 mm



## TOTAL DSS 785



- Decorative pyramidal hood
- Illuminated push buttons control
- EcoPower motor
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m<sup>3</sup>/h): 792
- Intensive speed exhaust capacity (m<sup>3</sup>/h): 760
- Max speed exhaust capacity (m<sup>3</sup>/h): 597
- Min speed exhaust capacity (m<sup>3</sup>/h): 303
- Intensive speed sound level (dBA): 73
- Max speed sound level (dBA): 68
- Min speed sound level (dBA): 54
- 1 LED lamp
- 2 Stainless Steel filters
- Stop delay timer
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/N1
- Optional Charcoal Filter: D4C



## COLOR

Stainless Steel

## EXTERNAL DIMENSIONS


Height 700 mm



## EASY DBP 90



- Decorative pyramidal hood
- Push buttons control
- 4 speeds
- Free Outlet exhaust capacity (m<sup>3</sup>/h): 650
- Max speed exhaust capacity (m<sup>3</sup>/h): 613
- Min speed exhaust capacity (m<sup>3</sup>/h): 318
- Max speed sound level (dBA): 56
- Min speed sound level (dBA): 28
- 2 LED lamps
- 3 Stainless Steel filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/M1
- Optional Charcoal Filter: D4C

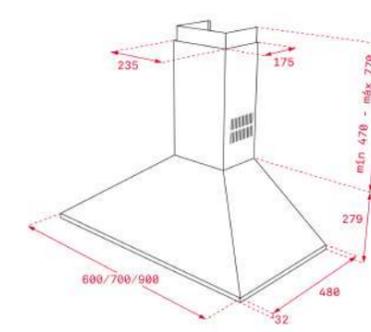

## COLOR

Stainless Steel

## EXTERNAL DIMENSIONS


Height 900 mm



## EASY DBP 70



- Decorative pyramidal hood
- Push buttons control
- 4 speeds
- Free Outlet exhaust capacity (m<sup>3</sup>/h): 650
- Max speed exhaust capacity (m<sup>3</sup>/h): 613
- Min speed exhaust capacity (m<sup>3</sup>/h): 318
- Max speed sound level (dBA): 56
- Min speed sound level (dBA): 28
- 2 LED lamps
- 2 Stainless Steel filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/M1
- Optional Charcoal Filter: D4C

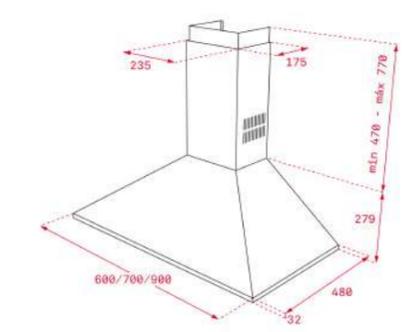

## COLOR

Stainless Steel

## EXTERNAL DIMENSIONS

Height 700 mm



**EASY DBP 60**



- **Decorative pyramidal hood**
- Push buttons control
- 4 speeds
- Free Outlet exhaust capacity (m3/h): 650
- Max speed exhaust capacity (m3/h): 613
- Min speed exhaust capacity (m3/h): 318
- Max speed sound level (dBA): 56
- Min speed sound level (dBA): 28
- 2 LED lamps
- 2 Stainless Steel filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/M1
- Optional Charcoal Filter: D4C

**EASY DBB 90**



- **Decorative pyramidal hood**
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 475
- Max speed exhaust capacity (m3/h): 380
- Min speed exhaust capacity (m3/h): 234
- Max speed sound level (dBA): 54
- Min speed sound level (dBA): 44
- 2 LED lamps
- 3 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/M1
- Optional Charcoal Filter: D4C

**EASY DBB 70**



- **Decorative pyramidal hood**
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 475
- Max speed exhaust capacity (m3/h): 380
- Min speed exhaust capacity (m3/h): 234
- Max speed sound level (dBA): 54
- Min speed sound level (dBA): 44
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/M1
- Optional Charcoal Filter: D4C

**EASY DBB 60**



- **Decorative pyramidal hood**
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 475
- Max speed exhaust capacity (m3/h): 380
- Min speed exhaust capacity (m3/h): 234
- Max speed sound level (dBA): 54
- Min speed sound level (dBA): 44
- 2 LED lamps
- 2 Stainless Steel filters
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 1/M1
- Optional Charcoal Filter: D4C

**MAESTRO INTEGRA 96750**









- **Built-in hood**
- Rotary knob control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 630
- Max speed exhaust capacity (m3/h): 620
- Min speed exhaust capacity (m3/h): 255
- Max speed sound level (dBA): 70
- Min speed sound level (dBA): 50
- 2 LED lamps
- 2 Aluminium filters
- Anti-return valve included
- Outlet reduction included
- Optional Charcoal Filter: D9C

**NEW**

**MAESTRO INTEGRA 66750**



- **Built-in hood**
- Rotary knob control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 630
- Max speed exhaust capacity (m3/h): 620
- Min speed exhaust capacity (m3/h): 225
- Max speed sound level (dBA): 70
- Min speed sound level (dBA): 50
- 2 LED lamp
- 1 Aluminium filter
- Anti-return valve included
- Outlet reduction included
- Optional Charcoal Filter: D9C

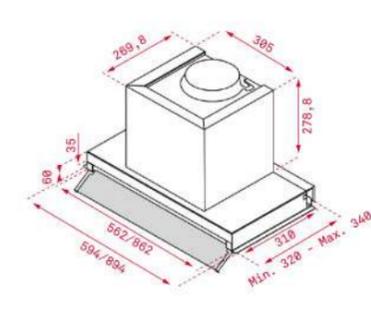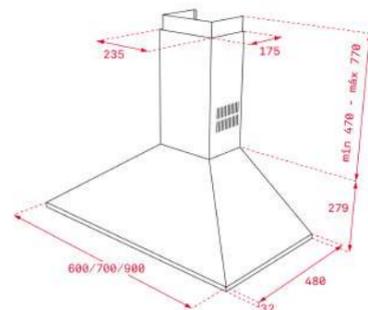

**COLOR**  
Stainless Steel

**EXTERNAL DIMENSIONS**  
Height 600 mm


**EXTERNAL DIMENSIONS**  
Height 900 mm

**EXTERNAL DIMENSIONS**  
Height 700 mm

**EXTERNAL DIMENSIONS**  
Height 600 mm

**EXTERNAL DIMENSIONS**  
Height 894 mm

**EXTERNAL DIMENSIONS**  
Height 894 mm

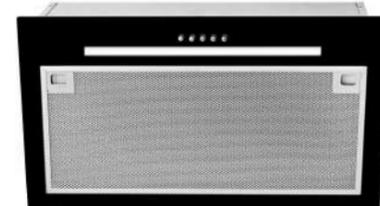


NEW

MAESTRO FIH 16760



- **Urban Colors Edition**
- **VarioPro Modular hood**
- Touch control
- FreshAir function
- Brushless EcoPower Motor
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 630
- Intensive speed exhaust capacity (m3/h): 600
- Max speed exhaust capacity (m3/h): 540
- Min speed exhaust capacity (m3/h): 415
- Intensive speed sound level (dBA): 70
- Max speed sound level (dBA): 67
- Min speed sound level (dBA): 62
- 1 mesh washable filter
- Stop delay timer
- Filter saturation indicator
- Operating pilot light
- Optional recirculation kit with tube cover installation: RFH 36100 FOA
- Optional Regenerative filter : R1RFB



COLOR

Black Glass


EXTERNAL DIMENSIONS

Height 110 mm

MAESTRO GFL 77650



- **Built-in filter group**
- Rim extraction
- Electronic control
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 800
- Max speed exhaust capacity (m3/h): 559
- Min speed exhaust capacity (m3/h): 285
- Intensive speed exhaust capacity (m3/h): 646
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 52
- 2 LED lamps
- 1 Aluminium filter
- Stop Delay Time
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional Charcoal Filter: C01RTK



COLOR

Stainless Steel


EXTERNAL DIMENSIONS

Height 712 mm

MAESTRO GFL 57650



- **Built-in filter group**
- Rim extraction
- Electronic control
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 800
- Max speed exhaust capacity (m3/h): 559
- Min speed exhaust capacity (m3/h): 285
- Intensive speed exhaust capacity (m3/h): 646
- Intensive speed sound level (dBA): 71
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 52
- 2 LED lamps
- 1 Aluminium filter
- Stop Delay Time
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional Charcoal Filter: C01RTK



COLOR

Stainless Steel


EXTERNAL DIMENSIONS

Height 712 mm

TOTAL GFG 2



- **Built-in hood**
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 444
- Max speed exhaust capacity (m3/h): 329
- Min speed exhaust capacity (m3/h): 223
- Max speed sound level (dBA): 67
- Min speed sound level (dBA): 53
- 1 LED lamp
- 1 Stainless Steel filter
- Anti-return valve included
- Optional Charcoal Filter: CNL 1C

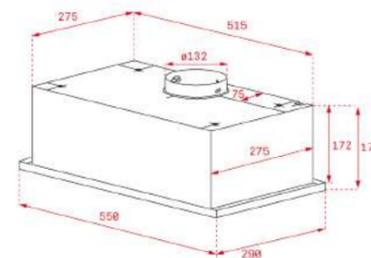

COLOR

Stainless Steel


EXTERNAL DIMENSIONS

Height 550 mm

TOTAL GFG2



- **Built-in hood**
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 444
- Max speed exhaust capacity (m3/h): 329
- Min speed exhaust capacity (m3/h): 223
- Max speed sound level (dBA): 67
- Min speed sound level (dBA): 53
- 1 LED lamp
- 1 aluminium filter
- Anti-return valve included
- Optional Charcoal Filter: CNL 1C

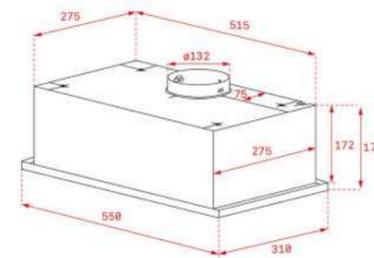

COLOR

Black Glass


EXTERNAL DIMENSIONS

Height 550 mm

TOTAL GFH 73



- **Built-in hood**
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 367
- Max speed exhaust capacity (m3/h): 329
- Min speed exhaust capacity (m3/h): 223
- Max speed sound level (dBA): 52
- Min speed sound level (dBA): 42
- 2 LED lamps
- 2 aluminium filters
- Operating pilot light
- Anti-return valve included
- Optional Charcoal Filter: CNL 1C

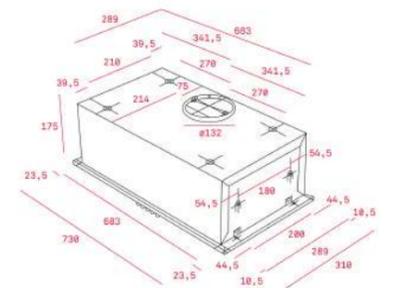

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 730 mm



TEKA





**TOTAL GFH 55**



- **Built-in hood**
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 367
- Max speed exhaust capacity (m3/h): 223
- Min speed exhaust capacity (m3/h): 329
- Max speed sound level (dBA): 52
- Min speed sound level (dBA): 42
- 2 LED lamps
- 2 Aluminium filters
- Anti-return valve included
- Optional Charcoal Filter: CNL 1C

**MAESTRO DHI 90**



- **Built-in hood**
- Electronic control
- 3 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 850
- Intensive speed sound level (dBA): 650
- Max speed exhaust capacity (m3/h): 400
- Min speed exhaust capacity (m3/h): 295
- Intensive speed sound level (dBA): 68
- Max speed sound level (dBA): 57
- Min speed sound level (dBA): 48
- 3 LED lamps
- 2 Stainless Steel filter
- Stop delay timer
- Easy-Clean inside panel
- Operating pilot light
- Anti-return valve included
- Outlet reduction included
- Optional recirculation kit with tube cover installation: SET 15
- Optional Charcoal Filter: D4C

**MAESTRO CNL 9815 PLUS**



- **Pull-out hood**
- Electronic control
- 5 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 734
- Intensive speed exhaust capacity (m3/h): 730
- Max speed exhaust capacity (m3/h): 555
- Min speed exhaust capacity (m3/h): 295
- Intensive speed sound level (dBA): 70
- Max speed sound level (dBA): 65
- Min speed sound level (dBA): 53
- 1 LED lamps
- 4 Stainless Steel filters
- Stop delay timer
- Fingerprint proof front panel
- Exchangeable Front Panel
- Anti-return valve included
- Outlet reduction included
- Optional Charcoal Filter: D1C

**MAESTRO CNL 6815 PLUS**



- **Pull-out hood**
- Electronic control
- 5 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 734
- Intensive speed exhaust capacity (m3/h): 730
- Max speed exhaust capacity (m3/h): 555
- Min speed exhaust capacity (m3/h): 295
- Intensive speed sound level (dBA): 70
- Max speed sound level (dBA): 65
- Min speed sound level (dBA): 53
- 1 LED lamps
- 2 Stainless Steel filters
- Stop delay timer
- Fingerprint proof front panel
- Exchangeable Front Panel
- Anti-return valve included
- Outlet reduction included
- Optional Charcoal Filter: D1C

**MAESTRO CNL 9415 PLUS**









- **Pull-out hood**
- Electronic control
- 5 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 393
- Intensive speed exhaust capacity (m3/h): 385
- Max speed exhaust capacity (m3/h): 293
- Min speed exhaust capacity (m3/h): 141
- Intensive speed sound level (dBA): 69
- Max speed sound level (dBA): 64
- Min speed sound level (dBA): 52
- 4 LEDS lamps
- 2 Stainless Steel filters
- Stop delay timer
- Operating pilot light
- Exchangeable Front Panel
- Anti-return valve included
- Optional Charcoal Filter: CNL 1C

**MAESTRO CNL 6415 PLUS**



- **Pull-out hood**
- Electronic control
- 5 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 393
- Intensive speed exhaust capacity (m3/h): 385
- Max speed exhaust capacity (m3/h): 293
- Min speed exhaust capacity (m3/h): 141
- Intensive speed sound level (dBA): 69
- Max speed sound level (dBA): 64
- Min speed sound level (dBA): 52
- 1 LED lamps
- 2 Stainless Steel filters
- Stop delay timer
- Fingerprint proof front panel
- Exchangeable Front Panel
- Anti-return valve included
- Optional Charcoal Filter: CNL 1C

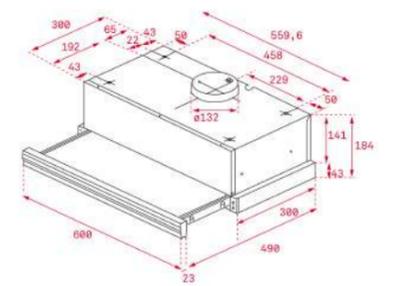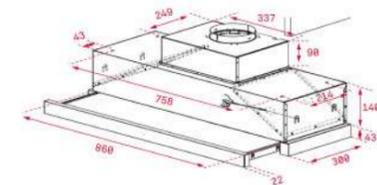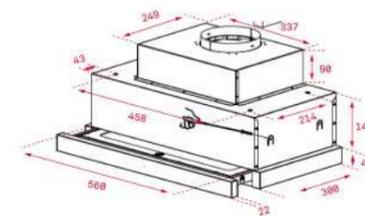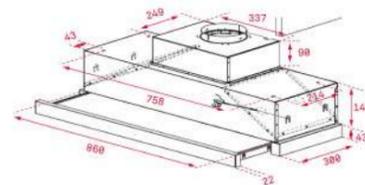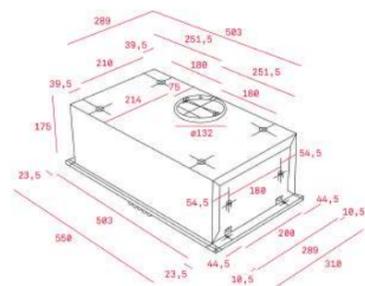

**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 550 mm

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**EXTERNAL DIMENSIONS**  
 Height 900 mm


**EXTERNAL DIMENSIONS**  
 Height 600 mm



**TOTAL CNL 6415**



- Pull-out hood
- Electronic control
- 2 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 393
- Intensive speed exhaust capacity (m3/h): 385
- Max speed exhaust capacity (m3/h): 312
- Min speed exhaust capacity (m3/h): 226
- Intensive speed sound level (dBA): 69
- Max speed sound level (dBA): 64
- Min speed sound level (dBA): 57
- 2 LED lamps
- 2 Stainless Steel filters
- Stop delay timer
- Fingerprint proof front panel
- Exchangeable Front Panel
- Anti-return valve included
- Optional Charcoal Filter: CNL 1C

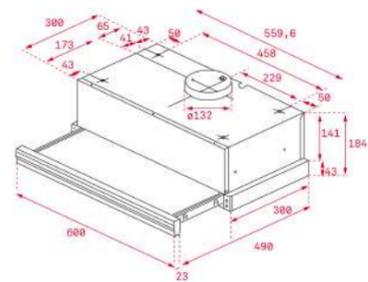


**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**TOTAL CNL 9610**



- Pull-out hood
- Electronic control
- 2 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 745
- Intensive speed exhaust capacity (m3/h): 694
- Max speed exhaust capacity (m3/h): 445
- Min speed exhaust capacity (m3/h): 330
- Intensive speed sound level (dBA): 70
- Max speed sound level (dBA): 63
- Min speed sound level (dBA): 60
- 3 LED lamps
- 4 Aluminium filters
- Stop delay timer
- Fingerprint proof front panel
- Exchangeable Front Panel
- Anti-return valve included
- Outlet reduction included
- Optional Charcoal Filter: D4C

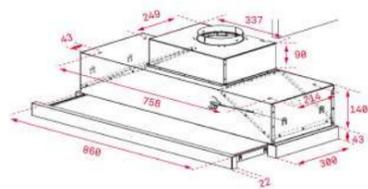


**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**TOTAL CNL 6610**



- Pull-out hood
- Electronic control
- 2 speeds + 1 intensive
- Free Outlet exhaust capacity (m3/h): 745
- Intensive speed exhaust capacity (m3/h): 694
- Max speed exhaust capacity (m3/h): 445
- Min speed exhaust capacity (m3/h): 330
- Intensive speed sound level (dBA): 70
- Max speed sound level (dBA): 63
- Min speed sound level (dBA): 60
- 2 LED lamps
- 2 Aluminium filters
- Stop delay timer
- Fingerprint proof front panel
- Exchangeable Front Panel
- Anti-return valve included
- Outlet reduction included
- Optional Charcoal Filter: D4C

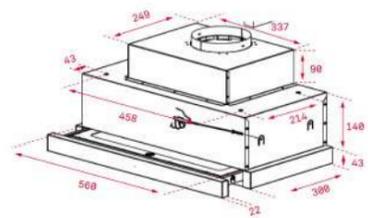

**COLOR**  
 Stainless Steel


**EXTERNAL DIMENSIONS**  
 Height 600 mm



**EASY C 9420**



- Classic hood
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h):422
- Max speed exhaust capacity (m3/h):375
- Min speed exhaust capacity (m3/h): 141
- Max speed sound level (dBA): 72
- Min speed sound level (dBA): 60
- 2 LEDS lamps
- 3 Aluminium filters
- Operating pilot light
- Fingerprint proof front panel
- Anti-return valve included
- Optional Charcoal Filter:C1R

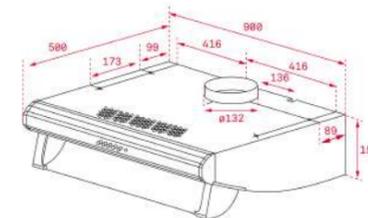


**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**EASY C 6420**



- Classic hood
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h):422
- Max speed exhaust capacity (m3/h):375
- Min speed exhaust capacity (m3/h): 141
- Max speed sound level (dBA): 73
- Min speed sound level (dBA): 60
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Fingerprint proof front panel
- Anti-return valve included
- Optional Charcoal Filter:C1R

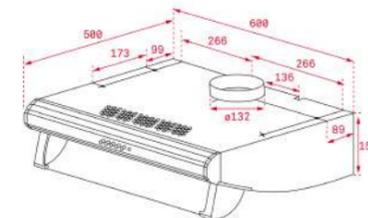


**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**EASY C 6420**



- Classic hood
- Touch slider control
- 3 speeds
- Free Outlet exhaust capacity (m3/h):422
- Max speed exhaust capacity (m3/h):375
- Min speed exhaust capacity (m3/h): 141
- Min speed sound level (dBA): 60
- Max speed sound level (dBA): 73
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Fingerprint proof front panel
- Anti-return valve included
- Optional Charcoal Filter:C1R

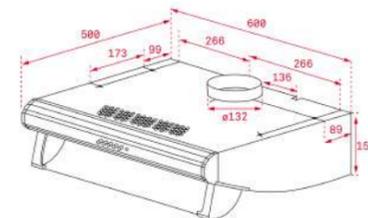

**COLOR**  
 White


**EXTERNAL DIMENSIONS**  
 Height 600 mm



**EASY C 9310**



- **Classic hood**
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h):254
- Max speed exhaust capacity (m3/h):235
- Min speed exhaust capacity (m3/h): 124
- Max speed sound level (dBA): 62
- Min speed sound level (dBA): 45
- 2 LEDS lamps
- 3 Aluminium filters
- Operating pilot light
- Fingerprint proof front panel
- Anti-return valve included
- Optional Charcoal Filter:C2R

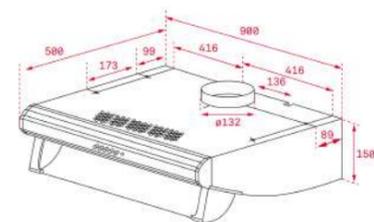


**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 900 mm

**EASY C 8310**

- **Classic hood**
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h):254
- Max speed exhaust capacity (m3/h):235
- Min speed exhaust capacity (m3/h): 124
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 49
- 2 Halogen lamps
- 2 Aluminium filters
- Operating pilot light
- Fingerprint proof front panel
- Anti-return valve included
- Optional Charcoal Filter:C2R

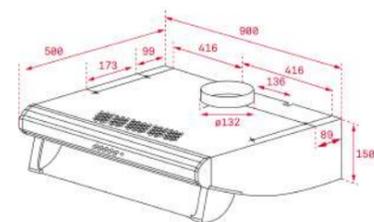


**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Width mm

**EASY C 7310**

- **Classic hood**
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h):254
- Max speed exhaust capacity (m3/h):235
- Min speed exhaust capacity (m3/h): 124
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 49
- 2 Halogen lamps
- 3 Aluminium filters
- Operating pilot light
- Fingerprint proof front panel
- Anti-return valve included
- Optional Charcoal Filter: C1R

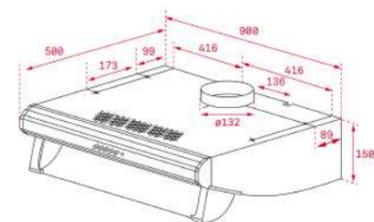


**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Width mm

**EASY C 6310**



- **Classic hood**
- Push buttons control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 254
- Max speed exhaust capacity (m3/h): 235
- Min speed exhaust capacity (m3/h): 124
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 49
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Optional Charcoal Filter: C2R

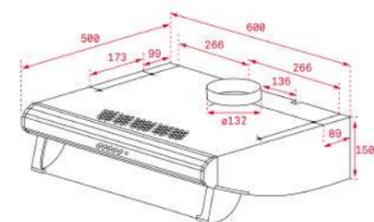


**COLOR**  
 Stainless Steel

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**EASY C 6310**



- **Classic hood**
- Touch slider control
- 3 speeds
- Free Outlet exhaust capacity (m3/h): 254
- Max speed exhaust capacity (m3/h): 235
- Min speed exhaust capacity (m3/h): 124
- Max speed sound level (dBA): 66
- Min speed sound level (dBA): 49
- 2 LED lamps
- 2 Aluminium filters
- Operating pilot light
- Anti-return valve included
- Optional Charcoal Filter: C2R

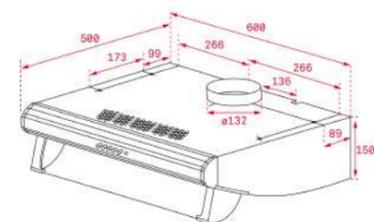


**COLOR**  
 White

**EXTERNAL DIMENSIONS**  
 Height 600 mm

**EASY TL 9310**



- **Pull-out hood**
- Mechanical control
- 2 speeds
- Free Outlet exhaust capacity (m3/h): 366
- Max speed exhaust capacity (m3/h): 332
- Min speed exhaust capacity (m3/h): 233
- Max speed sound level (dBA): 54
- Min speed sound level (dBA): 45
- 2 LED lamps
- 4 Aluminium filters
- Exchangeable front panel
- Anti-return valve included
- Optional Charcoal Filter: CNL 1C

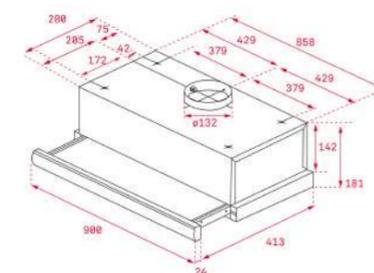

**COLOR**  
 Stainless Steel


**EXTERNAL DIMENSIONS**  
 Height 900 mm



## EASY TL 6310



- Pull-out hood
- Mechanical control
- 2 speeds
- Free Outlet exhaust capacity (m<sup>3</sup>/h): 366
- Max speed exhaust capacity (m<sup>3</sup>/h): 332
- Min speed exhaust capacity (m<sup>3</sup>/h): 233
- Max speed sound level (dBA): 54
- Min speed sound level (dBA): 45
- 2 LED lamps
- 2 Aluminium filters
- Exchangeable front panel
- Anti-return valve included
- Optional Charcoal Filter: CNL 1C

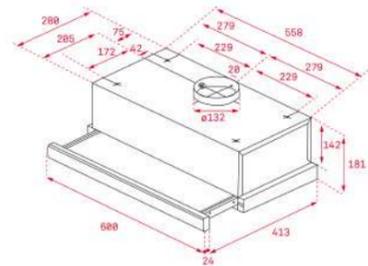

## COLOR

Stainless Steel

## EXTERNAL DIMENSIONS

Height 600 mm

Model	DVI 88 Infinity G1	DVI 88-G1 EOS BM	DHT 97670	DHT 1285	DH2 ISLA 985	DG3 ISLA 985	CC 485	DH2 ISLA 1285	ESTRUCTURA DH2 ISLA 1285
<b>PRODUCT FICHE</b>									
Annual energy consumption AEC kWh/annum (kWh)	40,1	23,8	34,4	46,7	47,8	47,8	44,7	47,8	0,0
Energy Efficiency Class	A+	A+++	A++	A	A	A	A	A	-
Fluid Dynamic Efficiency (FDEhood)	35,5	43,9	37,7	32,1	32,3	32,3	32,2	32,3	-
Fluid Dynamic Efficiency class	A	A	A	A	A	A	A	A	-
Light Efficiency (Lehood) lux/Watt	35,0	36	80	58,3	58,3	58,3	87,3	58,3	-
Lighting Efficiency class	A	A	A	A	A	A	A	A	-
Grease Filtering Efficiency (GFE-hood) %	75,62	75,1	77	86,8	83,4	83,4	77,8	83,4	-
Grease Filtering Efficiency class	C	C	C	B	C	C	C	C	-
Air flow (Qmin) m <sup>3</sup> /h	232	210	317	315	311	311	305	311	-
Air flow (Qmax) m <sup>3</sup> /h	411	625	634	631	605	605	525	605	-
Air flow (Qboost) m <sup>3</sup> /h	726	920	808	807	796	796	771	796	-
Noise (LwA) Min Speed (dB)	47,4	39	50	47	52	52	50	52	-
Noise (LwA) Max Speed (dB)	60	65	74	66	71	71	78	71	-
Noise (LwA) Boost Speed (dB)	71,1	72	74	66	71	71	78	71	-
Off mode Power (Po) W	0	0,32	-	-	-	-	-	-	-
Standby Power (Ps) W	0,32	-	0,5	1	0,6	0,6	0,7	0,6	-
Energy Efficiency Index (EEI)	41,1	26,9	36,9	49,9	50,1	50,1	47,3	50,1	0,0
Time increase actor (f)	0,7	0,4	0,6	0,8	0,8	0,8	0,8	0,8	-
Air flow at best efficiency point (Q <sub>bep</sub> ) m <sup>3</sup> / h	394	420	374	329,8	341	341	345	341	-
Air pressure at best efficiency point (P <sub>bep</sub> ) Pa	472	471	489	456	456	456	465	456	-
Electric power input at best efficiency point (W <sub>bep</sub> ) W	145,7	125	134,9	130,1	133,7	133,7	138,2	133,7	-
Nominal power of the lighting system (WL) W	4	7,5	6,6	12	12	12	6	12	-
<b>EXTERNAL DIMENSIONS</b>									
Width (mm)	800	900	900	1200	900	900	400	1200	-
Depth (mm)	435	450	600	600	600	600	400	600	-
Height (mm)	800-1100	1001-1331	214	305	817-1117+62	871-1171	900-1200	817-1117+62	-
<b>ELECTRICAL FEATURES</b>									
Motor power (W)	270	220	220	280	280	280	280	280	230
Total hood power (W)	278	228	226,6	292	292	292	286	292	292
<b>TECHNICAL DATA</b>									
Anti Return Valve	√	√	-	√	√	√	√	√	-
Ø Outlet (mm)	150	150	215x85	150	150	150	150	150	150
Number of Filters	1	2	2	4	2	2	1	2	2
Charcoal filter	C1RTK	C1RTK	-	(Küppersbusch has)	D4C	D4C	D4C	D4C	-
Recirculation kit	CG1 15200 L3C	CFH 15200 L3C	-	ZUB 9015	SET 1/T1	SET 1/T1	SET 1/I1	SET 1/T1	-

Model	CUERPO DPL ISLA 1185	DPL 1185 ISLA	DLV 99670 TOS BK	DLV 98660 TOS WH	DLV 98660 TOS ST	DLV 98660 TOS	DLV 98660 TOS LB	DLV 98660 TOS BK
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/annum (kWh)	49,3	0,0	23,8	43,1	43,1	43,1	43,1	43,1
Energy Efficiency Class	A	-	A+++	A+	A+	A+	A+	A+
Fluid Dynamic Efficiency (FDEhood)	32,1	-	43,9	35	35	35	35	35
Fluid Dynamic Efficiency class	A	-	A	A	A	A	A	A
Light Efficiency (Lehood) lux/Watt	58,3	-	36	36	36	36	36	36
Lighting Efficiency class	A	-	A	A	A	A	A	A
Grease Filtering Efficiency (GFEhood) %	75,9	-	75,1	75,9	75,9	75,9	75,9	75,9
Grease Filtering Efficiency class	C	-	C	C	C	C	C	C
Air flow (Qmin) m3/h	331	-	210	290	290	290	290	290
Air flow (Qmax) m3/h	629	-	625	558	558	558	558	558
Air flow (Qboost) m3/h	782	-	920	696	696	696	696	696
Noise (LwA) Min Speed (dB)	54	-	39	51	51	51	51	51
Noise (LwA) Max Speed (dB)	69	-	72	70	70	70	70	70
Noise (LwA) Boost Speed (dB)	69	-	72	70	70	70	70	70
Off mode Power (Po) W	-	-	0,3	0,3	0,3	0,3	0,3	0,3
Standby Power (Ps) W	0,7	-	-	-	-	-	-	-
Energy Efficiency Index (EEI)	50,1	0,0	26,9	42,9	42,9	42,9	42,9	42,9
Time increase actor (f)	0,8	-	0,4	0,7	0,7	0,7	0,7	0,7
Air flow at best efficiency point (Qbep) m3/h	346	-	420	384	384	384	384	384
Air pressure at best efficiency point (Pbep) Pa	464	-	471	484	484	484	484	484
Electric power input at best efficiency point (Wbep) W	139	-	125	147	147	147	147	147
Nominal power of the lighting system (WL) W	12	-	7,5	7,5	7,5	7,5	7,5	7,5
<b>EXTERNAL DIMENSIONS</b>								
Width (mm)	1100	1100	900	900	900	900	900	900
Depth (mm)	605	605	450	450	450	450	450	450
Height (mm)	817-1117	817-1117	1001-1331	1001-1331	1001-1331	1001-1331	1001-1331	1001-1331
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	280	230	220	265	265	265	265	265
Total hood power (W)	292	242	228	272,5	272,5	272,5	272,5	272,5
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	√	√	√	√
Ø Outlet (mm)	150	150	150	150	150	150	150	150
Number of Filters	3	3	2	2	2	2	2	2
Charcoal filter	D4C	-	CIRTK	CIRTK	CIRTK	CIRTK	CIRTK	CIRTK
Recirculation kit	SET 1/T1	-	CFH 15200 L3C	CFH 15200 L3C	CFH 15200 L3C	CFH 15200 L3C	CFH 15200 L3C	CFH 15200 L3C

Model	DLV 69670 TOS BK	DLV 68660 TOS	DVT 98660 TBS WH	DVT 98660 TBS BK				
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/annum (kWh)	22,7	42,4	42,4	42,4	42,4	42,4	38,7	38,7
Energy Efficiency Class	A+++	A+	A+	A+	A+	A+	A+	A+
Fluid Dynamic Efficiency (FDEhood)	43,3	36,5	36,5	36,5	36,5	36,5	35,1	35,1
Fluid Dynamic Efficiency class	A	A	A	A	A	A	A	A
Light Efficiency (Lehood) lux/Watt	52	52	52	52	52	52	69,8	69,8
Lighting Efficiency class	A	A	A	A	A	A	A	A
Grease Filtering Efficiency (GFEhood) %	75,9	75,9	75,9	75,9	75,9	75,9	75,9	75,9
Grease Filtering Efficiency class	C	C	C	C	C	C	C	C
Air flow (Qmin) m3/h	200	232	232	232	232	232	307	307
Air flow (Qmax) m3/h	600	410	410	410	410	410	584	584
Air flow (Qboost) m3/h	880	725	725	725	725	725	698	698
Noise (LwA) Min Speed (dB)	39	49	49	49	49	49	61	61
Noise (LwA) Max Speed (dB)	72	71	71	71	71	71	74	74
Noise (LwA) Boost Speed (dB)	72	71	71	71	71	71	74	74
Off mode Power (Po) W	0,3	0,3	0,3	0,3	0,3	0,3	-	-
Standby Power (Ps) W	-	-	-	-	-	-	0,7	0,7
Energy Efficiency Index (EEI)	26,2	42,9	42,9	42,9	42,9	42,9	41	41,0
Time increase actor (f)	0,4	0,7	0,7	0,7	0,7	0,7	0,7	0,7
Air flow at best efficiency point (Qbep) m3/h	410	385	385	385	385	385	361	361
Air pressure at best efficiency point (Pbep) Pa	469	493	493	493	493	493	488	488
Electric power input at best efficiency point (Wbep) W	123	145	145	145	145	145	140	140
Nominal power of the lighting system (WL) W	6,5	6,7	6,7	6,7	6,7	6,7	4,2	4,2
<b>EXTERNAL DIMENSIONS</b>								
EXTERL DIMENSIONS								
Width (mm)	600	600	600	600	600	600	900	900
Depth (mm)	450	450	450	450	450	450	412	412
Height (mm)	1001-1331	1001-1331	1001-1331	1001-1331	1001-1331	1001-1331	800-1100	800-1100
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	220	265	265	265	265	265	280	280
Total hood power (W)	227	272,5	272,5	272,5	272,5	272,5	286	286
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	√	√	√	√
Ø Outlet (mm)	150	150	150	150	150	150	150	150
Number of Filters	1	1	1	1	1	1	2	2
Charcoal filter	CIRTK	CIRTK	CIRTK	CIRTK	CIRTK	CIRTK	CIRTK	CIRTK
Recirculation kit	CFH 15200 L3C	CFH 15200 L3C	CFH 15200 L3C	CFH 15200 L3C	CFH 15200 L3C	CFH 15200 L3C	CFH 15200 L2C	CFH 15200 L2C

Model	DVT 78660 TBS WH	DVT 78660 TBS BK	DVT 68660 TBS	DVT 68660 TBS	DVF 97670 TBS WH	DVF 97670 TBS BK	DVN 97050 TTC WH	DVN 97050 TTC BK
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/ annum (kWh)	38,7	38,7	38,7	38,7	35,1	35,1	46,5	46,5
Energy Efficiency Class	A+	A+	A+	A+	A++	A++	A	A
Fluid Dynamic Efficiency (FDEhood)	35,1	35,1	35,1	35,1	37,6	37,6	29,7	29,7
Fluid Dynamic Efficiency class	A	A	A	A	A	A	A	A
Light Efficiency (Lehood) lux/Watt	69,8	69,8	69,8	30,2	45	45	68,1	68,1
Lighting Efficiency class	A	A	A	A	A	A	A	A
Grease Filtering Efficiency (GFEhood) %	75,9	75,9	75,9	75,9	75,1	75,1	65,1	65,1
Grease Filtering Efficiency class	C	C	C	C	C	C	C	C
Air flow (Qmin) m3/h	307	307	307	307	270	270	260	260
Air flow (Qmax) m3/h	584	584	584	584	400	400	485	485
Air flow (Qboost) m3/h	698	698	698	698	740	740	640	640
Noise (LwA) Min Speed (dB)	61	61	61	52	53	53	54	54
Noise (LwA) Max Speed (dB)	74	74	74	74	70	70	71	71
Noise (LwA) Boost Speed (dB)	74	74	74	74	70	70	71	71
Off mode Power (Po) W	-	-	-	-	0,5	0,5	-	-
Standby Power (Ps) W	0,7	0,7	0,7	0,7	-	-	0,5	0,5
Energy Efficiency Index (EEI)	41	41,0	41	41,0	35,7	35,7	51	51
Time increase actor (f)	0,7	0,7	0,7	0,7	6	6	0,9	0,9
Air flow at best efficiency point (Qbep) m3 /h	361	361	361	361	4.290	4.290	375	375
Air pressure at best efficiency point(Pbep) Pa	488	488	488	488	464	464	385	385
Electric power input at best efficiency point (Wbep) W	140	140	140	139,6	1.470	1.470	135	135
Nominal power of the lighting system (WL) W	4,2	4,2	4,2	4,2	2,2	2,2	3	3
<b>EXTERNAL DIMENSIONS</b>								
Width (mm)	700	700	600	600	898	898	898	898
Depth (mm)	412	412	412	412	409	409	325	325
Height (mm)	380	800-1100	800-1100	380	912-1172	912-1172	690-1035	690-1035
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	280	280	280	280	270	270	230	230
Total hood power (W)	286	286	286	286	272	272	233	233
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	√	-	√	√
Ø Outlet (mm)	150	150	150	150	150	150	150	150
Number of Filters	-	2	2	2	2	2	1	1
Charcoal filter	C1RTK	C1RTK	C1RTK	C1RTK	D11C	D11C	D9C	D9C
Recirculation kit	CFH 15200 L2C	CFH 15200 L2C	CFH 15200 L2C	CFH 15200 L2C	SET D11CTP	SET D11CTP	SET D13CTP	SET D13CTP

Model	DVN 77050 TTC WH	DVN 77050 TTC BK	DVN 67050 TTC WH	DVN 67050 TTC BK	DVN 94030 TTC	DVN 94030 TTC	DVN 74030 TTC	DVN 74030 TTC
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/ annum (kWh)	46,5	46,5	46,5	46,5	60,2	60,2	60,2	60,2
Energy Efficiency Class	A	A	A	A	C	C	C	C
Fluid Dynamic Efficiency (FDEhood)	29,7	29,7	29,7	29,7	11,1	11,1	11,1	11,1
Fluid Dynamic Efficiency class	A	A	A	A	E	E	E	E
Light Efficiency (Lehood) lux/Watt	68,1	68,1	68,1	68,1	76,1	76,1	76,1	76,1
Lighting Efficiency class	A	A	A	A	A	A	A	A
Grease Filtering Efficiency (GFEhood) %	65,1	65,1	65,1	65,1	75,1	75,1	75,1	75,1
Grease Filtering Efficiency class	C	C	C	C	C	C	C	C
Air flow (Qmin) m3/h	260	260	260	260	380	380	380	380
Air flow (Qmax) m3/h	485	485	485	485	410	410	410	410
Air flow (Qboost) m3/h	640	640	640	640	425	425	425	425
Noise (LwA) Min Speed (dB)	54	54	54	54	65	65	65	65
Noise (LwA) Max Speed (dB)	71	71	71	71	67	67	67	67
Noise (LwA) Boost Speed (dB)	71	71	71	71	67	67	67	67
Off mode Power (Po) W	-	-	-	-	-	-	-	-
Standby Power (Ps) W	0,5	0,5	0,5	0,5	0,5	0,5	0,5	0,5
Energy Efficiency Index (EEI)	51	51	51	51	C	C	C	C
Time increase actor (f)	0,9	0,9	0,9	0,9	1,6	1,6	1,6	1,6
Air flow at best efficiency point (Qbep) m3 /h	375	375	375	375	246	246	246	246
Air pressure at best efficiency point(Pbep) Pa	385	385	385	385	163	163	163	163
Electric power input at best efficiency point (Wbep) W	135	135	135	135	101	101	101	101
Nominal power of the lighting system (WL) W	3	3	3	3	2	2	2	2
<b>EXTERNAL DIMENSIONS</b>								
Width (mm)	698	698	598	598	898	898	698	698
Depth (mm)	325	325	325	325	325	325	325	325
Height (mm)	690-1035	690-1035	690-1035	690-1035	690-1035	690-1035	690-1035	690-1035
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	230	230	230	230	140	140	140	140
Total hood power (W)	233	233	233	233	142	142	142	142
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	√	√	√	√
Ø Outlet (mm)	150	150	150	150	150	150	150	150
Number of Filters	1	1	1	1	1	1	1	1
Charcoal filter	D9C	D9C	D9C	D9C	D9C	D9C	D9C	D9C
Recirculation kit	SET D13CTP	SET D13CTP	SET D13CTP	SET D13CTP	SET D13CTP	SET D13CTP	SET D13CTP	SET D13CTP

Model	DVN 64030 TTC	DVN 64030 TTC	DU 985	DVF 67670 TBS	DVF 67670 TBS	DPL 986 T	DPL 786 T	DPS 986
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/annum (kWh)	60,2	60,2	46,2	35,1	35,1	42,2	42,2	42,2
Energy Efficiency Class	C	C	A	A++	A++	A+	A+	A+
Fluid Dynamic Efficiency (FDEhood)	11,1	11,1	32,3	37,6	37,6	35,1	35,1	35,1
Fluid Dynamic Efficiency class	E	E	A	A	A	A	A	A
Light Efficiency (Lehood) lux/Watt	76,1	76,1	73,3	45	45	56,7	64,7	56,7
Lighting Efficiency class	A	A	A	A	A	A	A	A
Grease Filtering Efficiency (GFEhood) %	75,1	75,1	87,9	75,1	75,1	75,9	75,9	75,9
Grease Filtering Efficiency class	C	C	B	F	F	C	C	C
Air flow (Qmin) m3/h	380	380	315	270	270	320	320	320
Air flow (Qmax) m3/h	410	410	631	400	400	589	589	589
Air flow (Qboost) m3/h	425	425	807	740	740	722	722	722
Noise (LwA) Min Speed (dB)	65	65	56	53	53	54	54	54
Noise (LwA) Max Speed (dB)	67	67	72	70	70	69	69	69
Noise (LwA) Boost Speed (dB)	67	67	72	70	70	69	69	69
Off mode Power (Po) W	-	-	-	0,5	0,5	0,3	0,3	0,3
Standby Power (Ps) W	0,5	0,5	0,7	-	-	-	-	-
Energy Efficiency Index (EEI)	C	C	49,9	35,7	35,7	42,2	42,2	42,2
Time increase actor (f)	1,6	1,6	0,8	6	6	0,7	0,7	0,7
Air flow at best efficiency point (Qbep) m3/h	246	246	335,2	4.290	4.290	400,6	400,6	400,6
Air pressure at best efficiency point(Pbep) Pa	163	163	445	464	464	467	467	467
Electric power input at best efficiency point (Wbep) W	101	101	128,3	1.470	1.470	148,1	148,1	148,1
Nominal power of the lighting system (WL) W	2	2	12	2,2	2,2	6	6	6
<b>EXTERNAL DIMENSIONS</b>								
Width (mm)	598	598	900	598	598	900	700	900
Depth (mm)	325	325	450	409	409	480	480	480
Height (mm)	690-1035	690-1035	350	912-1172	912-1172	690-1010	690-1010	690-1010
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	140	140	280	270	270	265	265	265
Total hood power (W)	142	142	292	272	272	271	271	271
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	-	√	√	√
Ø Outlet (mm)	150	150	150	150	150	150	150	150
Number of Filters	1	1	1	2	2	3	2	3
Charcoal filter	D9C	D9C	D4C	D11C	D11C	C1RTK	C1RTK	C1RTK
Recirculation kit	SET D13CTP	SET D13CTP	1/M	SET D11CTP	SET D11CTP	CFH 15200 L2C	CFH 15200 L2C	CFH 15200 L2C

Model	DPS 786	DLH 1185 T	DLH 985 T	DLH 1186 T	DLH 986 T	DLH 786 T	DLH 686 T	DSH 985
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/annum (kWh)	42,2	41,0	41,0	40,7	40,7	40,7	40,7	54,7
Energy Efficiency Class	A+	A	A	A+	A+	A+	A+	A
Fluid Dynamic Efficiency (FDEhood)	35,1	34,3	34,3	35,3	35,3	35,3	35,3	31
Fluid Dynamic Efficiency class	A	A	A	A	A	A	A	A
Light Efficiency (Lehood) lux/Watt	64,7	55,7	55,7	49,3	49,3	55,2	55,2	55,2
Lighting Efficiency class	A	A	A	A	A	A	A	A
Grease Filtering Efficiency (GFEhood) %	75,9	98,2	98,2	82	82	82	82	82
Grease Filtering Efficiency class	C	A	A	C	C	C	C	C
Air flow (Qmin) m3/h	320	352	352	303	303	303	303	305
Air flow (Qmax) m3/h	589	651	651	584	584	584	584	586
Air flow (Qboost) m3/h	722	760	760	701	701	701	701	735
Noise (LwA) Min Speed (dB)	54	54	54	53	53	53	53	54
Noise (LwA) Max Speed (dB)	69	72	72	72	72	72	72	72
Noise (LwA) Boost Speed (dB)	69	72	72	72	72	72	72	72
Off mode Power (Po) W	0,3	0,3	0,3	0,3	0,3	0,3	0,3	0,3
Standby Power (Ps) W	-	-	-	-	-	-	-	-
Energy Efficiency Index (EEI)	42,2	47,2	47,2	42,0	42,0	42,0	42,0	53,2
Time increase actor (f)	0,7	0,8	0,8	0,7	0,7	0,7	0,7	0,9
Air flow at best efficiency point (Qbep) m3/h	400,6	364	364	385,3	385,3	385,3	385,3	388
Air pressure at best efficiency point(Pbep) Pa	467	417	417	469	469	469	469	440
Electric power input at best efficiency point (Wbep) W	148,1	123	123	142,2	142,2	142,2	142,2	153,1
Nominal power of the lighting system (WL) W	6	7	7	6	6	6	6	6
<b>EXTERNAL DIMENSIONS</b>								
Width (mm)	900	1100	900	1100	900	700	600	900
Depth (mm)	480	480	480	480	480	480	480	480
Height (mm)	690-1010	670-1000	670-1000	670-1000	670-1000	670-1000	670-1000	670-1000
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	265	280	280	265	265	265	265	280
Total hood power (W)	271	287	287	271	271	271	271	286
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	√	√	√	√
Ø Outlet (mm)	150	150	150	150	150	150	150	150
Number of Filters	2	3	3	4	3	2	2	3
Charcoal filter	C1RTK							
Recirculation kit	CFH 15200 L2C							

Model	DSH 785	DSH 685	DSJ 980	DSJ 680	DG 985	DG 785	DG 685	NC 985
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/annum (kWh)	54,7	54,7	96,7	96,7	56,7	56,7	56,7	56,7
Energy Efficiency Class	A	A	C	C	A	A	A	A
Fluid Dynamic Efficiency (FDEhood)	31	31	16,4	16,4	30,5	30,5	30,5	30,5
Fluid Dynamic Efficiency class	A	A	D	D	A	A	A	A
Light Efficiency (Lehood) lux/Watt	55,2	55,2	31,7	35	65,2	77,2	73,8	65,2
Lighting Efficiency class	A	A	A	A	A	A	A	A
Grease Filtering Efficiency (GFEhood) %	82	82	76,1	76,1	83,7	83,7	83,7	83,7
Grease Filtering Efficiency class	C	C	C	C	C	C	C	C
Air flow (Qmin) m3/h	305	305	268	268	315	315	315	315
Air flow (Qmax) m3/h	586	586	614	614	631	631	631	631
Air flow (Qboost) m3/h	735	735	-	-	807	807	807	807
Noise (LwA) Min Speed (dB)	54	54	48	48	56	56	56	56
Noise (LwA) Max Speed (dB)	72	72	-	-	72	72	72	72
Noise (LwA) Boost Speed (dB)	72	72	-	-	72	72	72	72
Off mode Power (Po) W	0,3	0,3	-	-	-	-	-	-
Standby Power (Ps) W	-	-	-	-	0,6	0,6	0,6	0,6
Energy Efficiency Index (EEI)	53,2	53,2	81,5	81,5	53,3	53,3	53,3	53,3
Time increase actor (f)	0,9	0,9	1,4	1,4	0,9	0,9	0,9	0,9
Air flow at best efficiency point (Qbep) m3/h	388	388	363,1	363,1	403,9	403,9	403,9	403,9
Air pressure at best efficiency point (Pbep) Pa	440	440	301	301	434	434	434	434
Electric power input at best efficiency point (Wbep) W	153,1	153,1	185	185	159,4	159,4	159,4	159,4
Nominal power of the lighting system (WL) W	6	6	3	3	6	6	6	6
<b>EXTERNAL DIMENSIONS</b>								
Width (mm)	700	600	900	900	900	700	600	900
Depth (mm)	480	480	480	480	500	500	500	500
Height (mm)	670-1000	670-1000	670-1000	670-1000	667-997	667-997	667-997	674-1004
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	280	280	220	220	280	280	280	280
Total hood power (W)	286	286	223	223	286	286	286	286
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	√	√	√	√
Ø Outlet (mm)	150	150	150	150	150	150	150	150
Number of Filters	2	2	3	2	1	1	1	1
Charcoal filter	C1RTK							
Recirculation kit	CFH 15200 L2C							

Model	NC 785	NC 685	DQ2 985	DOS 90.1	DOS 90.1 VANI-LLA-BRASS	DOS 90.1 VANI-LLA-SILVER	DOS 90.1 AN-THRACITE-SILVER	DOS 60.1
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/annum (kWh)	56,7	56,7	44,0	68,4	68,4	68,4	68,4	68,4
Energy Efficiency Class	A	A	A	B	B	B	B	B
Fluid Dynamic Efficiency (FDEhood)	30,5	30,5	32,3	238	23,8	23,8	23,8	238
Fluid Dynamic Efficiency class	A	A	A	B	B	B	B	B
Light Efficiency (Lehood) lux/Watt	77,2	73,8	64,4	201	20,1	20,1	20,1	201
Lighting Efficiency class	A	A	A	B	B	B	B	B
Grease Filtering Efficiency (GFEhood) %	83,7	83,7	86,5	660	66	66	66	660
Grease Filtering Efficiency class	C	C	B	D	D	D	D	D
Air flow (Qmin) m3/h	315	315	315	256.0	256	256	256	256.0
Air flow (Qmax) m3/h	631	631	631	603.0	603	603	603	603.0
Air flow (Qboost) m3/h	807	807	807	-	-	-	-	-
Noise (LwA) Min Speed (dB)	56	56	56	51	51	51	51	51
Noise (LwA) Max Speed (dB)	72	72	72	-	-	-	-	-
Noise (LwA) Boost Speed (dB)	72	72	72	-	-	-	-	-
Off mode Power (Po) W	-	-	-	-	-	-	-	-
Standby Power (Ps) W	0,6	0,6	0,6	-	-	-	-	-
Energy Efficiency Index (EEI)	53,3	53,3	48,5	64,3	64,3	64,3	64,3	64,3
Time increase actor (f)	0,9	0,9	0,8	11	1,1	1,1	1,1	11
Air flow at best efficiency point (Qbep) m3/h	403,9	403,9	335,2	2.880	288	288	288	2.880
Air pressure at best efficiency point (Pbep) Pa	434	434	445	4.740	474	474	474	4.740
Electric power input at best efficiency point (Wbep) W	159,4	159,4	128,3	1.595	159,5	159,5	159,5	1.595
Nominal power of the lighting system (WL) W	6	6	9	6,0	6,0	6,0	6,0	6,0
<b>EXTERNAL DIMENSIONS</b>								
Width (mm)	700	600	895	600/900	600/900	600/900	600/900	600/900
Depth (mm)	500	500	895	500	500	500	500	500
Height (mm)	674-1004	674-1004	680-1010	733-1148	733-1148	733-1148	733-1148	733-1148
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	280	280	280	250	250	250	250	250
Total hood power (W)	286	286	289	290	290	290	290	290
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	√	√	√	√
Ø Outlet (mm)	150	150	150	150	150	150	150	150
Number of Filters	1	1	2	2	2	2	2	2
Charcoal filter	C1RTK	C1RTK	D4C	D5C	D5C	D5C	D5C	D5C
Recirculation kit	CFH 15200 L2C	CFH 15200 L2C	SET 1/L	SET 4/D	SET 4/D	SET 4/D	SET 4/D	SET 4/D

Model	DOS 60.1 VANI-LLA-BRASS	DOS 60.1 VANI-LLA-SILVER	DOS 60.1 AN-THRACITE-SILVER	DSS 985	DSS 785	DBP 90	DBP 70	DBP 60
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/annum (kWh)	68,4	68,4	68,4	54,6	52,4	104,1	104,1	104,1
Energy Efficiency Class	B	B	B	A	A	C	C	C
Fluid Dynamic Efficiency (FDEhood)	23,8	23,8	23,8	33	33	17,1	17,1	17,1
Fluid Dynamic Efficiency class	B	B	B	A	A	D	E	E
Light Efficiency (Lehood) lux/Watt	20,1	20,1	20,1	41,7	43,3	7	7	7
Lighting Efficiency class	B	B	B	A	A	F	F	F
Grease Filtering Efficiency (GFEhood) %	66	66	66	82,7	82,7	83,7	83,7	83,7
Grease Filtering Efficiency class	D	D	D	C	C	C	C	C
Air flow (Qmin) m3/h	256	256	256	303	303	268	268	268
Air flow (Qmax) m3/h	603	603	603	597	597	614	614	614
Air flow (Qboost) m3/h	-	-	-	760	760	-	-	-
Noise (LwA) Min Speed (dB)	51	51	51	54	54	55	55	55
Noise (LwA) Max Speed (dB)	-	-	-	73	73	-	-	-
Noise (LwA) Boost Speed (dB)	-	-	-	73	73	-	-	-
Off mode Power (Po) W	-	-	-	0,3	0,3	-	-	-
Standby Power (Ps) W	-	-	-	-	-	-	-	-
Energy Efficiency Index (EEI)	64,3	64,3	64,3	50,4	49,2	83,0	83,0	83,0
Time increase actor (f)	1,1	1,1	1,1	0,8	0,8	1,4	1,4	1,4
Air flow at best efficiency point (Qbep) m3/h	288	288	288	418	418	358,6	358,6	358,6
Air pressure at best efficiency point (Pbep) Pa	474	474	474	446	446	330	330	330
Electric power input at best efficiency point (Wbep) W	159,5	159,5	159,5	157	157	191,8	191,8	191,8
Nominal power of the lighting system (WL) W	6,0	6,0	6,0	12	9	8,4	8,4	8,4
<b>EXTERNAL DIMENSIONS</b>								
Width (mm)	600/900	600/900	600/900	900	700	900	700	600
Depth (mm)	500	500	500	480	480	480	480	480
Height (mm)	733-1148	733-1148	733-1148	700-1100	700-1100	749-1049	749-1049	749-1049
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	250	250	250	280	280	180	180	180
Total hood power (W)	290	290	290	292	289	190	190	190
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	√	√	√	√
Ø Outlet (mm)	150	150	150	150	150	150	150	150
Number of Filters	2	2	2	3	2	3	2	2
Charcoal filter	D5C	D5C	D5C	C1RTK	C1RTK	C1RTK	C1RTK	C1RTK
Recirculation kit	SET 4/D	SET 4/D	SET 4/D	CFH 15200 L2C				

Model	DBB 90	DBB 70	DBB 60	INTEGRA 96750	INTEGRA 66750	FIH 16760	GFL 77650	GFL 57650
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/annum (kWh)	62,3	62,3	62,3	55,2	55,2	37,4	49,3	49,3
Energy Efficiency Class	D	D	D	A	A	A+	A	A
Fluid Dynamic Efficiency (FDEhood)	6,9	6,9	6,9	29,2	29,2	33,3	30,7	30,7
Fluid Dynamic Efficiency class	F	F	F	A	A	A	A	A
Light Efficiency (Lehood) lux/Watt	5,9	5,9	5,9	76,1	76,1	-	126,3	126,3
Lighting Efficiency class	F	F	F	A	A	-	A	A
Grease Filtering Efficiency (GFEhood) %	73,4	73,4	73,4	75,1	75,1	75,1	86,5	86,5
Grease Filtering Efficiency class	D	D	D	C	C	C	B	B
Air flow (Qmin) m3/h	234	234	234	255	255	415	285	285
Air flow (Qmax) m3/h	380	380	380	620	620	540	559	559
Air flow (Qboost) m3/h	-	-	-	-	-	600	646	646
Noise (LwA) Min Speed (dB)	44	44	44	50	50	62	52	52
Noise (LwA) Max Speed (dB)	-	-	-	-	-	70	71	71
Noise (LwA) Boost Speed (dB)	-	-	-	-	-	70	71	71
Off mode Power (Po) W	-	-	-	0,5	0,5	0,5	-	-
Standby Power (Ps) W	-	-	-	-	-	-	0,4	0,4
Energy Efficiency Index (EEI)	93,3	93,3	93,3	52,9	52,9	43,6	53,1	53,1
Time increase actor (f)	1,8	1,8	1,8	0,9	0,9	0,8	0,9	0,9
Air flow at best efficiency point (Qbep) m3/h	210,6	210,6	210,6	380	380	304	314,1	314,1
Air pressure at best efficiency point (Pbep) Pa	99	99	99	435	435	505	470	470
Electric power input at best efficiency point (Wbep) W	83,7	83,7	83,7	157	157	128	133,6	133,6
Nominal power of the lighting system (WL) W	10	10	10	5	5	-	7,4	7,4
<b>EXTERNAL DIMENSIONS</b>								
Width (mm)	900	700	600	894	894	110	712	532
Depth (mm)	480	480	480	310	310	510	284	284
Height (mm)	749-1049	749-1049	749-1049	339	339	186	316	316
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	105	105	105	250	250	145	280	280
Total hood power (W)	115	115	115	255	255	145	288	288
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	√	-	√	√
Ø Outlet (mm)	150	150	150	150	150	220x90	150	150
Number of Filters	3	2	2	2	1	1	1	1
Charcoal filter	C1RTK	C1RTK	C1RTK	D9C	D9C	-	C01RTK	C01RTK
Recirculation kit	CFH 15200 L2C	CFH 15200 L2C	CFH 15200 L2C	-	-	-	-	-

Model	GFG 2	GFG2	GFH 73	GFH 55	DHI 90	CNL 9815 PLUS	CNL 6815 PLUS	CNL 6415 PLUS
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/annum (kWh)	76,7	76,2	77,6	77,6	130,2	56,6	54,5	30,3
Energy Efficiency Class	D	D	D	D	D	A	A	A
Fluid Dynamic Efficiency (FDEhood)	9,6	9,6	10,1	10,1	13,7	33,1	33,1	26,7
Fluid Dynamic Efficiency class	E	E	E	E	D	A	A	B
Light Efficiency (Lehood) lux/Watt	55,8	16,4	33,8	33,8	75	41,7	43,3	43,3
Lighting Efficiency class	A	C	A	A	A	A	A	A
Grease Filtering Efficiency (GFEhood) %	76,4	76,4	65,1	77,6	83,7	84	84	84
Grease Filtering Efficiency class	C	C	D	C	C	C	C	C
Air flow (Qmin) m3/h	171	160	156	156	295	295	295	141
Air flow (Qmax) m3/h	304	303	315	315	400	555	555	293
Air flow (Qboost) m3/h	-	-	-	-	650	730	730	385
Noise (LwA) Min Speed (dB)	53	53	53	53	48	53	53	52
Noise (LwA) Max Speed (dB)	-	-	-	-	68	70	70	69
Noise (LwA) Boost Speed (dB)	-	-	-	-	68	70	70	69
Off mode Power (Po) W	-	-	-	-	-	-	-	-
Standby Power (Ps) W	-	-	-	-	1	-	-	-
Energy Efficiency Index (EEI)	92,7	92,5	88,2	88,2	90,2	50,5	49,3	54,1
Time increase actor (f)	1,7	1,7	1,6	1,6	1,5	0,8	0,8	1
Air flow at best efficiency point (Qbep) m3/h	168	174	187,5	187,5	402	420	420	237
Air pressure at best efficiency point(Pbep) Pa	238	232	250	250	278	465	465	264
Electric power input at best efficiency point (Wbep) W	116	117	129,1	129,1	225,8	164	164	65
Nominal power of the lighting system (WL) W	7	5	3	3	9	12	9	9
<b>EXTERNAL DIMENSIONS</b>								
Width (mm)	550	550	730	550	900	900	600	600
Depth (mm)	290	310	310	310	345	300/490	300/490	300/490
Height (mm)	178	178	175	175	445	274	274	184
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	130	130	130	130	230	265	265	110
Total hood power (W)	135	135	134	134	239	277	274	119
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	√	√	√	√
Ø Outlet (mm)	120	120	120	120	150	150	150	120
Number of Filters	1	1	2	2	2	4	2	2
Charcoal filter	CNL 1C	CNL 1C	CNL 1C	CNL 1C	D4C	D1C	D1C	CNL 1C
Recirculation kit	-	-	-	-	SET 1S	-	-	-

Model	CNL 6415	CNL 9610	CNL 6610	C 9420	C 6420	C 6420	C 9310	C 8310
<b>PRODUCT FICHE</b>								
Annual energy consumption AEC kWh/annum (kWh)	25,9	107,0	105,9	103,1	103,1	103,1	67,1	130,9
Energy Efficiency Class	A	C	C	D	D	D	D	E
Fluid Dynamic Efficiency (FDEhood)	26,7	17,2	17,2	8,9	8,9	8,9	8,1	5,3
Fluid Dynamic Efficiency class	B	D	D	E	E	E	E	F
Light Efficiency (Lehood) lux/Watt	42,7	33,3	42,7	4,5	4,8	4,8	4,5	0,8
Lighting Efficiency class	A	A	A	F	F	F	F	G
Grease Filtering Efficiency (GFEhood) %	74,6	72,8	72,8	72,8	72,8	72,8	72,8	72,8
Grease Filtering Efficiency class	D	D	D	D	D	D	D	D
Air flow (Qmin) m3/h	226	330	330	187	187	187	115	124
Air flow (Qmax) m3/h	312	445	445	353	353	353	218	235
Air flow (Qboost) m3/h	385	694	694	-	-	-	-	-
Noise (LwA) Min Speed (dB)	57	60	60	60	60	60	45	49
Noise (LwA) Max Speed (dB)	69	70	70	-	-	-	-	-
Noise (LwA) Boost Speed (dB)	69	70	70	-	-	-	-	-
Off mode Power (Po) W	-	-	-	-	-	-	-	-
Standby Power (Ps) W	-	-	-	-	-	-	-	-
Energy Efficiency Index (EEI)	49,1	82,7	82,4	97,7	97,7	97,7	91	107,7
Time increase actor (f)	1	1,4	1,4	1,7	1,7	1,7	1,7	1,8
Air flow at best efficiency point (Qbep) m3/h	237	433	433	216	216	216	131,4	136
Air pressure at best efficiency point(Pbep) Pa	264	290	290	225	225	225	208	191
Electric power input at best efficiency point (Wbep) W	65	203	203	152	152	152	94,1	137
Nominal power of the lighting system (WL) W	3	5	3	12	12	12	12	56
<b>EXTERNAL DIMENSIONS</b>								
Width (mm)	600	900	600	900	600	600	900	-
Depth (mm)	300/490	300/490	300/490	500	500	500	500	-
Height (mm)	184	274	274	150	150	150	150	-
<b>ELECTRICAL FEATURES</b>								
Motor power (W)	110	230	230	188	188	188	108	130
Total hood power (W)	113	235	233	200	200	200	120	215
<b>TECHNICAL DATA</b>								
Anti Return Valve	√	√	√	√	√	√	√	√
Ø Outlet (mm)	120	150	150	120	120	120	120	120
Number of Filters	2	4	2	3	2	2	3	2
Charcoal filter	CNL 1C	D4C	D4C	C1R	C1R	C1R	C2R	C2R
Recirculation kit	-	-	-	-	-	-	-	-

# HOODS

Model	C 7310	C 6310	C 6310	TL 9310	TL 6310
<b>PRODUCT FICHE</b>					
Annual energy consumption AEC kWh/annum (kWh)	130,9	67,1	67,1	78,1	78,1
Energy Efficiency Class	E	D	D	D	D
Fluid Dynamic Efficiency (FDEhood)	5,3	8,1	8,1	9,3	9,3
Fluid Dynamic Efficiency class	F	E	E	E	E
Light Efficiency (Lehood) lux/Watt	0,8	4,8	4,8	9	9
Lighting Efficiency class	G	F	F	F	F
Grease Filtering Efficiency (GFEhood) %	72,8	72,8	72,8	68	68
Grease Filtering Efficiency class	D	D	D	D	D
Air flow (Qmin) m <sup>3</sup> /h	124	128	128	160	160
Air flow (Qmax) m <sup>3</sup> /h	235	226	218	304	304
Air flow (Qboost) m <sup>3</sup> /h	-	-	-	-	-
Noise (LwA) Min Speed (dB)	49	45	45	49	49
Noise (LwA) Max Speed (dB)	-	-	-	-	-
Noise (LwA) Boost Speed (dB)	-	-	-	-	-
Off mode Power (Po) W	-	-	-	-	-
Standby Power (Ps) W	-	-	-	-	-
Energy Efficiency Index (EEI)	107,7	91	91	93,8	93,8
Time increase actor (f)	1,8	1,7	1,7	1,7	1,7
Air flow at best efficiency point (Qbep) m <sup>3</sup> /h	136	131,4	131,4	153,8	153,8
Air pressure at best efficiency point (Pbep) Pa	191	208	208	243	243
Electric power input at best efficiency point (Wbep) W	137	94,1	94,1	111,7	111,7
Nominal power of the lighting system (WL) W	56	12	12	12	12
<b>EXTERNAL DIMENSIONS</b>					
Width (mm)	-	600	600	900	600
Depth (mm)	-	500	500	304-437	304-437
Height (mm)	-	150	150	181	181
<b>ELECTRICAL FEATURES</b>					
Motor power (W)	130	108	108	130	130
Total hood power (W)	215	120	120	146	146
<b>TECHNICAL DATA</b>					
Anti Return Valve	√	√	√	√	√
Ø Outlet (mm)	120	120	120	120	120
Number of Filters	3	2	2	2	2
Charcoal filter	C2R	C2R	C2R	CNL 1C	CNL 1C
Recirculation kit	-	-	-	-	-